

**7.25" ROKKER Series
LOWER Fairing Speaker
In-Series Connection Harness**

#HLRK-7252-ISCH

**Installation
Instructions**

Installation Instructions

After installing the J&M lower speakers on to the Harley lower fairing shells, plug this connection harness into the corresponding left and right plugs from the lower speakers.


Make the in-series connections to the fairing speakers as shown in the wiring diagram below.

Remove the J&M amplifier cooling fan splash cover (if installed) and sealing tape to expose the left and right gain controls. (Front gain controls ONLY for J&M 500w 4-ch amp)

Make note of the factory set position of these controls & then turn both of these gain controls in a clockwise direction, about 2-3 hours on the 12 hour clock face, from the pre-set position.

Then reseal the exposed gain controls with scotch tape or similar.

Trim the new included cooling fan splash cover as necessary to fit, then peel back the double-sided tape and reinstall this cover as before.

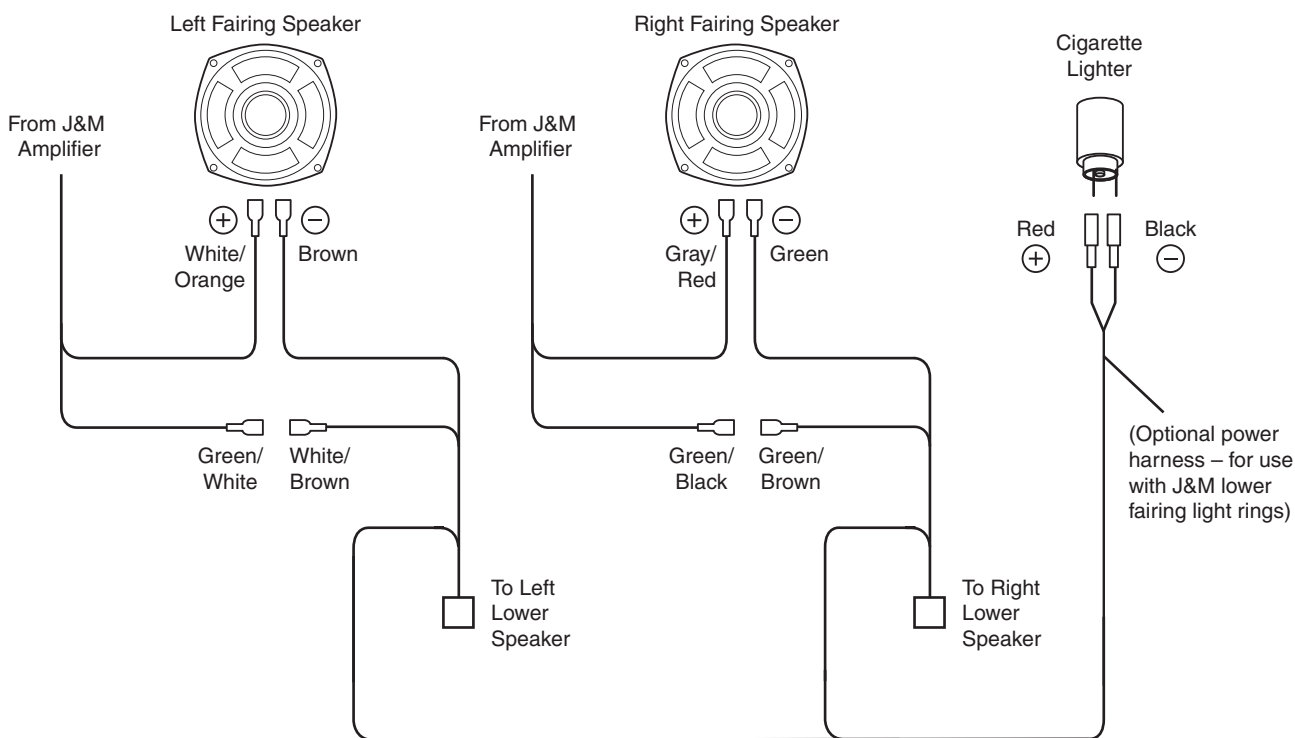

Thank you for the confidence you have shown in J&M Corporation by purchasing one of our innovative products.

