
## CYCLOPE HEADLIGHT

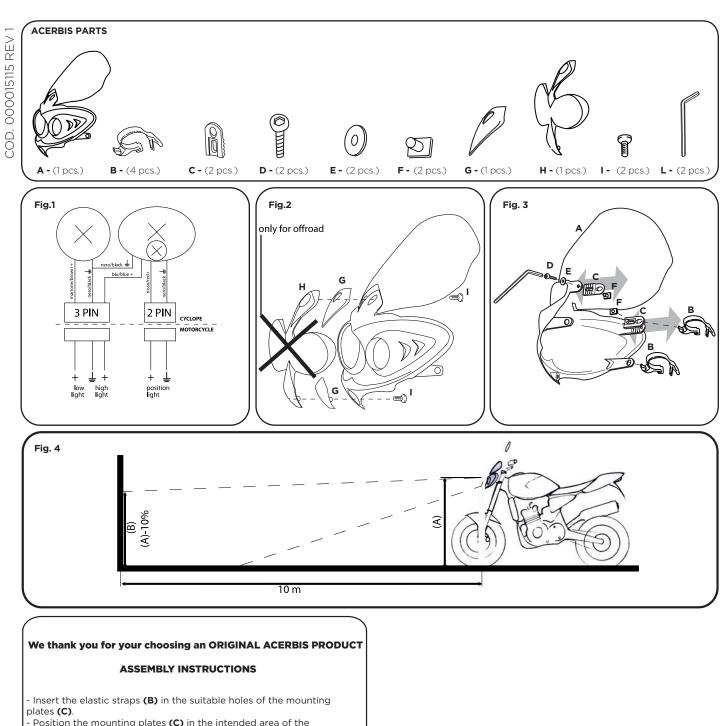

Position the mounting plates (C) in the intended area of the template (see fig. 3), fastening it with the screws (D), the washers (E) and square nut (F) tightening themselves with the allen wrench (G).
Insert the other two elastics straps below (B) in the provided holes oh the headlight and then fasten all four elastic straps to the forks.
To wire headlight to your motorcycle/dirt bike follow the scheme in fig. 1.

Protection for the lights (the protection is not DOT approved)

WARNING! Of road motorcycle lights regulary fail through vibration. Always check your lights before riding at night. Off road use only. Not legal for use on public highways. Be sure you follow the installation instructions exactly. If the headlapms fall off, it can jam the front wheel. Do not secure cables with number plate mounting straps. Use the guides provided. Before riding, check that all cables, hoses, and controls function properly. The rubber mounting straps are subject to deterioration from atmospheric pollutants. Always inspect them before riding. Never ride unl ess all four are properly installed and in good condition.