



COD. 500002569 REV 2


ACERBIS PARTS	O.E.M ITEMS TO USE:
A - (1 pcs.)	C (1 pcs.)
D (1 pcs.)	E (1 pump. +4 screws)

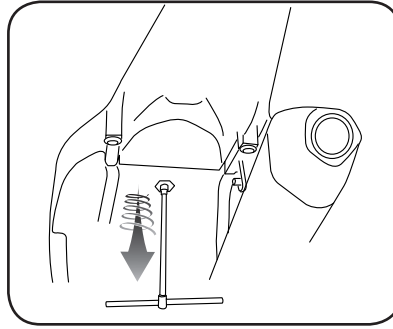


1. Remove the seat

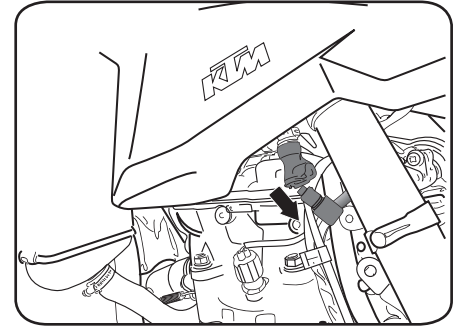


2. Remove the fuel line fittings

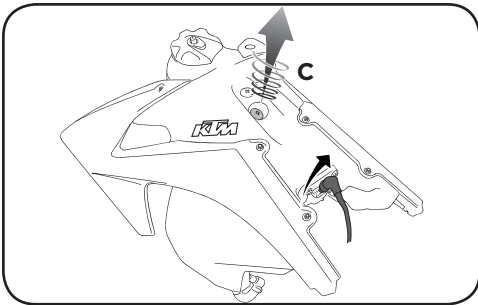


3. Unscrew the tank screw. Disconnect the fuel pump power cable

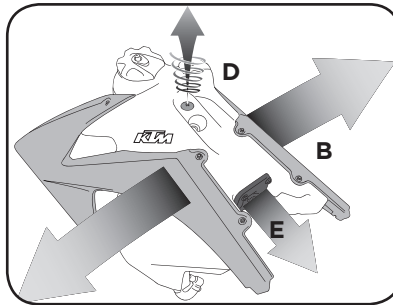


4. Remove the ktm tank. Remove the seat screw. Remove the radiator scoops. Remove the fuel pump

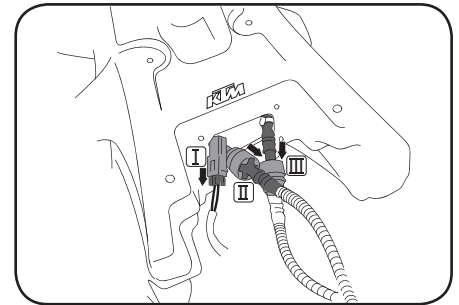


5. Disconnect the cables

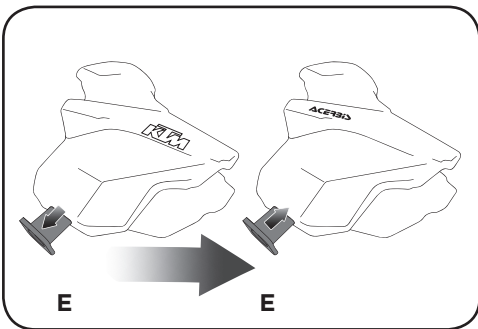


6. Remove the pump and install the fuel pump on the Acerbis tank
TORQUE SPEC: 2,2 FT/LBS 3,0N/m

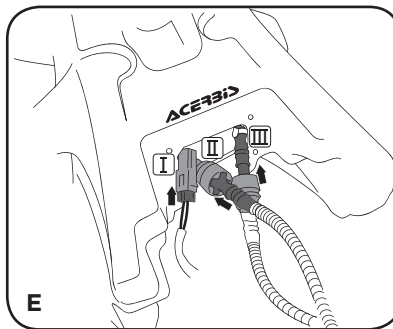


7. Place the acerbis tank and connect the cables

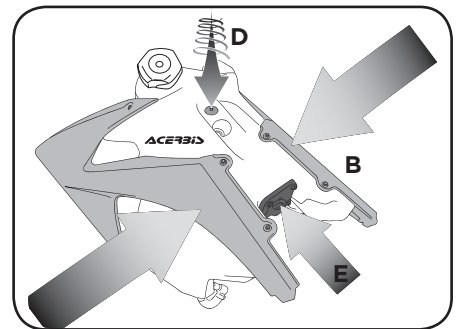


8. Install the seat screw. Attach the radiator scoops. Reassemble the pump

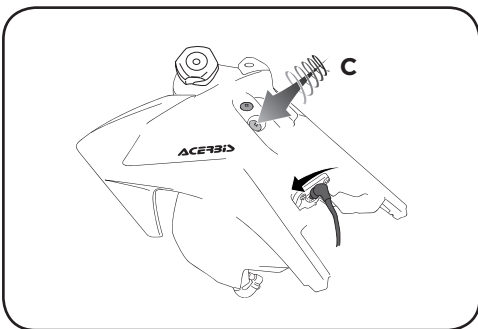

9. Install the tank screw. Connect the fuel pump power cable

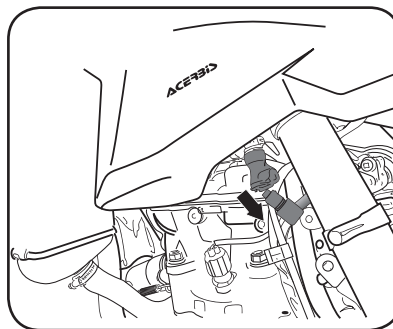

10. Reassemble the fuel line Fittings

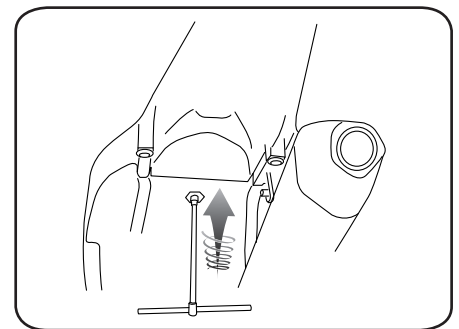

11. Install the seat