




ACERBIS PARTS	O.E.M ITEMS TO USE:
A1 - L13,5 (1 pcs.)	G
A2 - L18 (1 pcs.)	H
B - (2 pcs.)	I
C1 - M6X25 (1 pcs.)	D - M6x40 (2 pcs.)
C2 - M6X30 (1 pcs.)	
E - (2 pcs.)	
F - M6X10 (2 pcs.)	
L - L29 (2 pcs.)	
M - M6X20 (6 pcs.)	
N - (1 pcs.)	
O - M6 (6 pcs.)	
P - M5X14 (1 pcs.)	
Q+R (1 + 1 pcs.)	

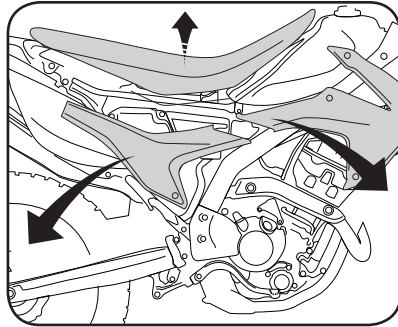


1. Remove the seat and plastics

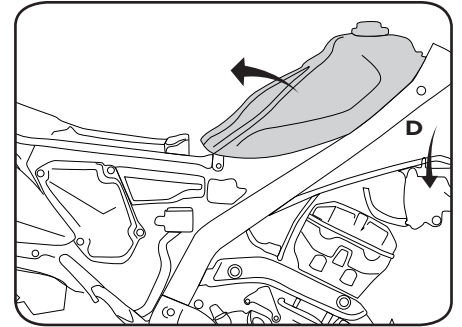


2. Remove the original tank: two screws D that fix the tank, will be used for fix the radiator scoops.

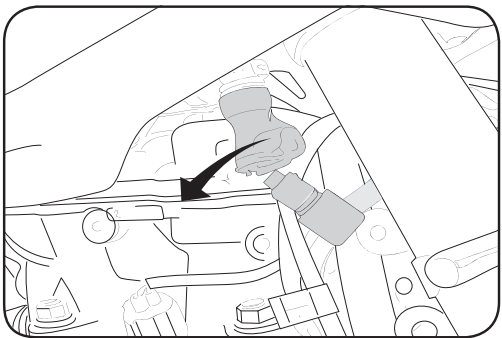


3. Disconnect the pump tank connections

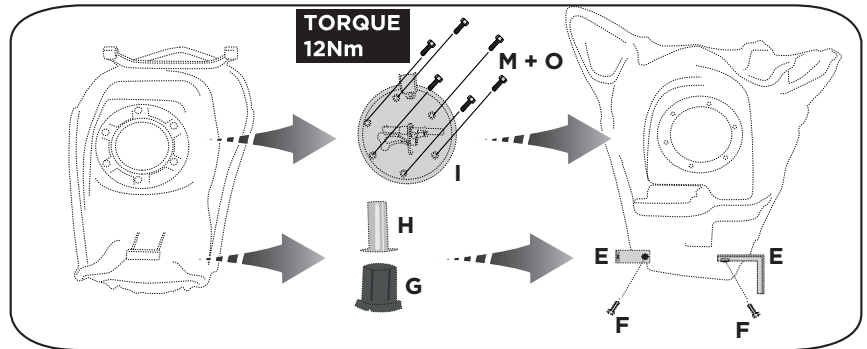

4. Remove the original tank rubber G+H, the pump and reassemble using closing torque 12 Nm, fixing the pump with the screws M and washers O. Fix on the tank the brackets E by the screws F.

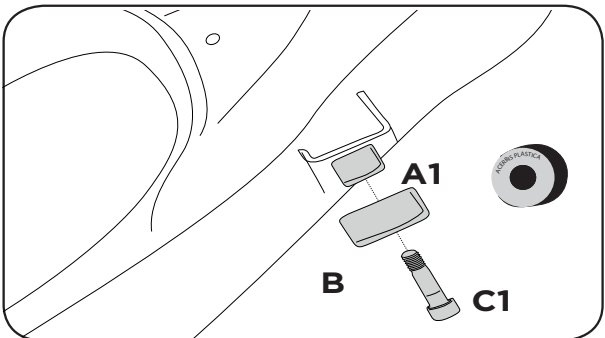

5. Mount all the brackets Rh on the frame (the B rubber must be fix with the "ACERBIS PLASTICA" outside)

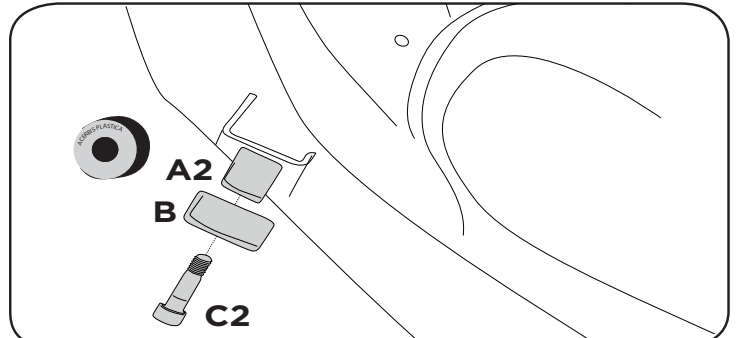


6. Mount all the brackets Lh on the frame (the B rubber must be fix with the "ACERBIS PLASTICA" outside)

WARNING!
Clean tank interior thoroughly before installation. install this fuel tank only in a well ventilated area, as gasoline fumes are extremely dangerous. do not start operate the vehicle if there are any fuel leaks! acerbis recommends that installation be done by licensed mechanic. read all instructions first before beginning installation.


DISCLAIMER:
DISCLAIMER: Due to uncontrolled variables in the manufacturing process of rotationally molded fuel tanks, the fuel tank may vary in size and shape by up 7% of the manufacturer's original listed capacity.

FOR COMPETITION USE ONLY


COD. 500002979 REV5

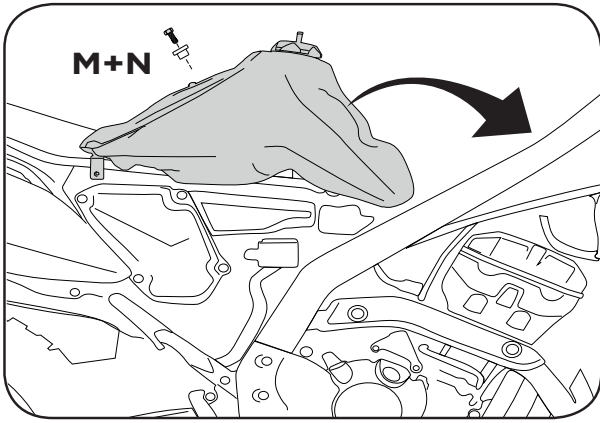


7. Fix the seat bush N by the screw M and Mount Acerbis tank on the bike.

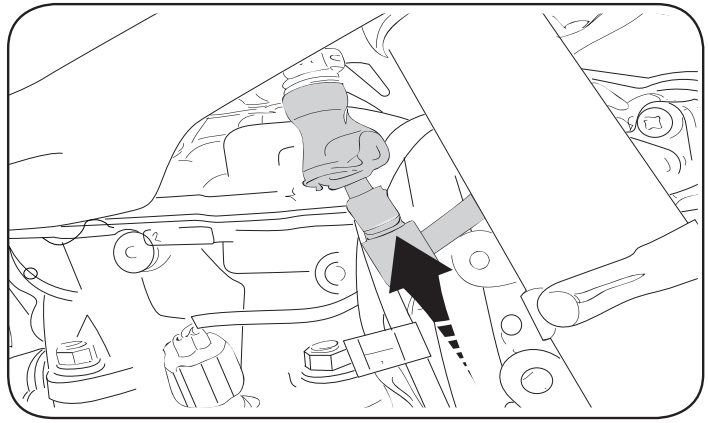


8. Reconnect the pump tank

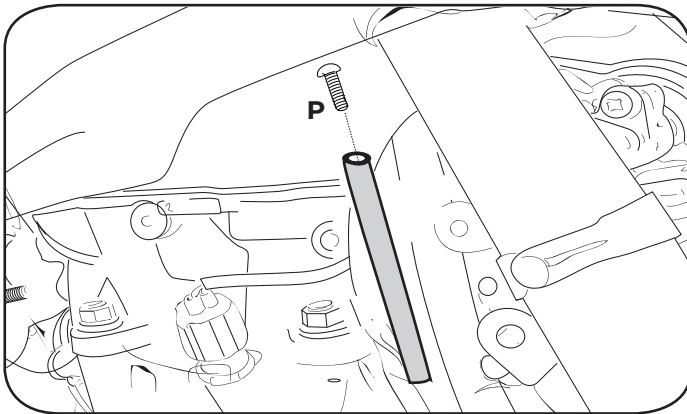

9. Put the screw P on drainage pipe of gasoline.

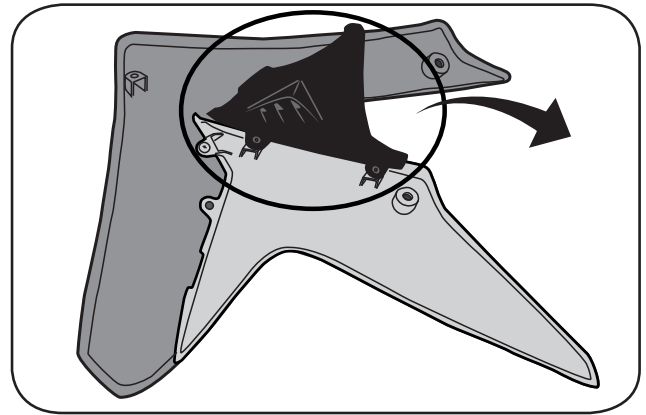

10. Remove the internal cover from the right radiator scoop.

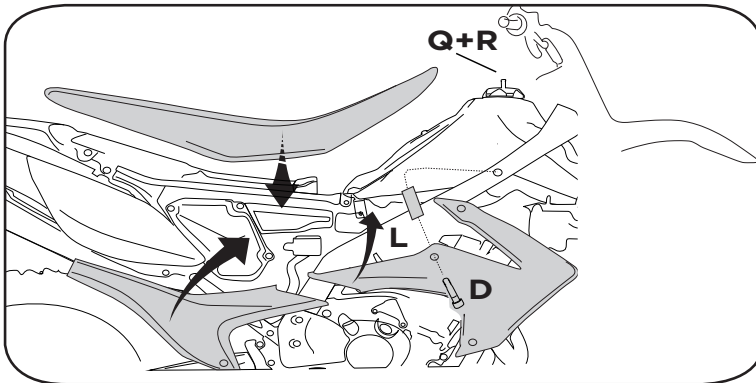

11. Mount plastics and the seat. Use the screws D and the bush L for fix the central hole of the radiator scoops. Fix the Q Pipe on the cup and on handlebar by the R plastic bracket .

WARNING!

Clean tank interior thoroughly before installation. install this fuel tank only in a well ventilated area, as gasoline fumes are extremely dangerous. do not start operate the vehicle if there are any fuel leaks! acerbis recommends that installation be done by licensed mechanic. read all instructions first before beginning installation.

DISCLAIMER:

DISCLAIMER: Due to uncontrolled variables in the manufacturing process of rotationally molded fuel tanks, the fuel tank may vary in size and shape by up 7% of the manufacturer's original listed capacity.

FOR COMPETITION USE ONLY