
















FUEL INJECTED FC 16/17 FE 2017

COD. 500005677


ACERBIS PARTS	O.E.M ITEMS TO USE:	ACERBIS PARTS ONLY FOR US TANKS
 <p><b>A</b> - (1 pcs.)</p> <p><b>M</b> - (4 pcs.)</p> <p><b>C</b> - (1 pcs.)</p>	 <p><b>B</b> - (1 pcs.)</p>  <p><b>I</b> - (1 pcs.)</p>  <p><b>F</b> - (1 pcs.)</p>  <p><b>H</b> - (1 pcs.)</p>  <p><b>G</b> - (1 pcs.)</p>  <p><b>D</b> - (5 pcs.)</p>  <p><b>E</b> - (6 pcs.)</p>	 <p><b>G</b> - (1 pcs.)</p>  <p><b>F</b> - (1 pcs.)</p>  <p><b>E</b> - (6 pcs.)</p>  <p><b>D</b> - (5 pcs.)</p>  <p><b>L</b> - (1 pcs.)</p>

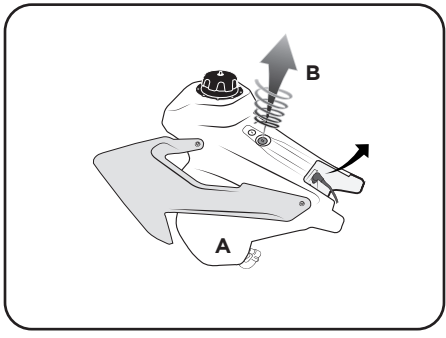


**1.** Remove the tank screws B. Disconnect the fuel pump power cable.

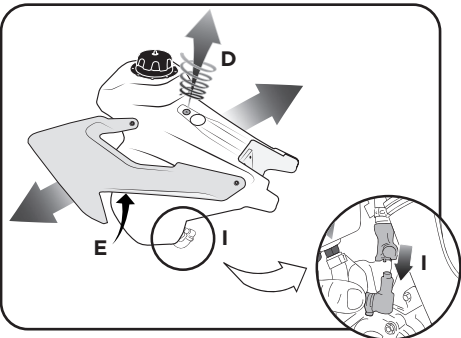


**2.** Remove the radiator scoops, the seat screw and the Husqvarna tank.

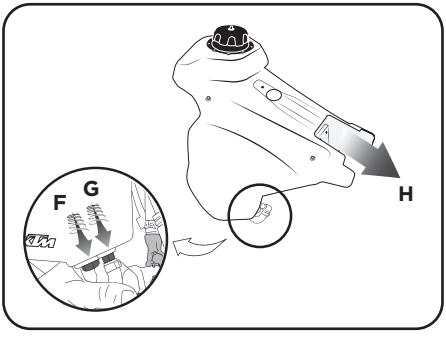


**3.** Empty your fuel tank completely, remove the fasteners F/G and disconnect the fuel connector by unscrewing the four pump screw H.

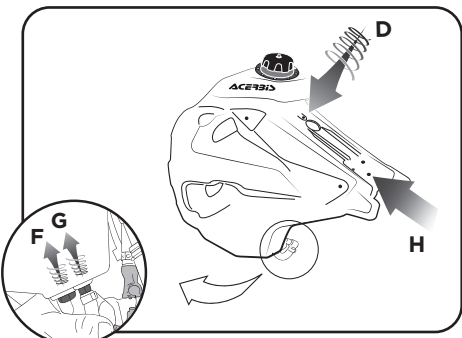


**4.** Insert the seat screw D (2,5KN - 22INH), fasteners F/G on the Acerbis fuel tank and reconnect the fuel connector by screwing the four pump screw H (3KN - 26INH).

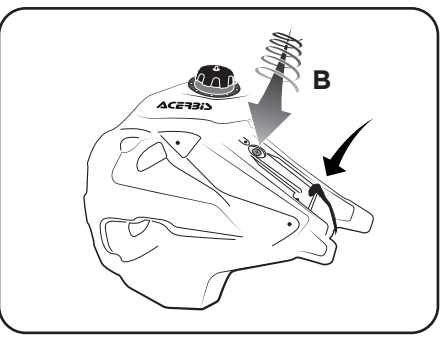

**5.** Arrange the tank on the bike, reconnect the fuel pump power cable and screw the tank screw B back on.

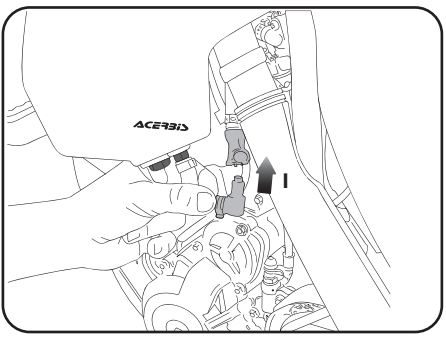

**6.** Reconnect the fuel connector.

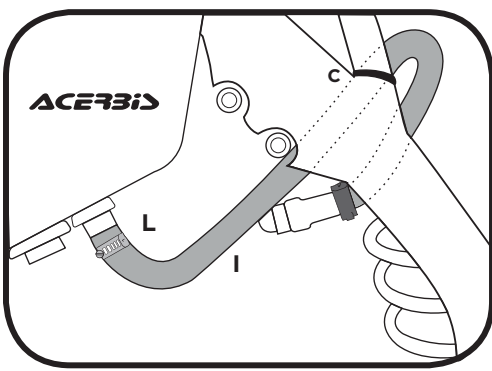


**ATTENTION: Pump hose mounting detail**


Fix the pump hose HUSQVARNA as illustrated: use the Acerbis strap C included make sure that the hose doesn't fold obstructing the fluid.

**FUEL INJECTED FC 16/17 FE 2017**


COD. 500005677

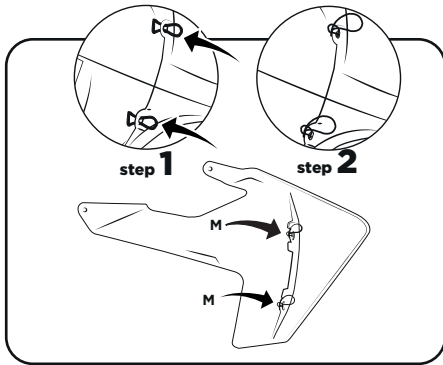


**7.** Fasten the O-rings M to the radiator scoops, as shown.

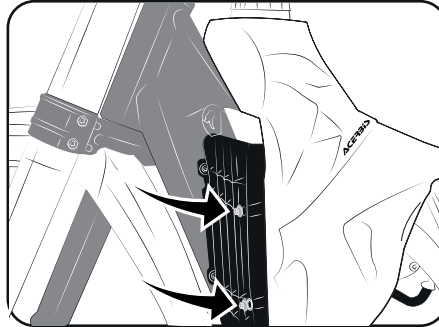

**8.** Tighten the screws to the radiators.

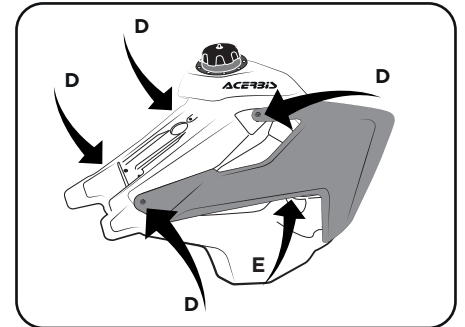

**9.** Remounting the radiator scoops with 4 screws D and 2 screws E.

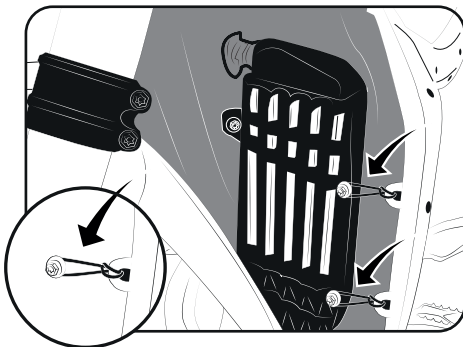

**10.** Fasten the O-rings on the screws previously installed.

**ACERBIS®**

Thank you for purchasing an ACERBIS fuel tank

**WARNING**

It is **EXTREMELY IMPORTANT** that the fuel tank be properly installed. To ensure proper installation, it is **STRONGLY RECOMMENDED** that the tank be installed only by a qualified OEM licensed dealership mechanic. Improper installation could result in serious injury or even death.

**If self-installed NOTE THE FOLLOWING.** Particular attention must be paid to excessive fuel line length and fuel line proximity to hot engine areas and pipes to prevent fire.

Clean tank interior thoroughly before installation. Install this fuel tank only in a well ventilated area, as gasoline fumes are extremely dangerous. Do not start or operate the vehicle if there are any fuel leaks! Read all instruction first before beginning installation.

**DISCLAIMER**

Due to uncontrolled variables in the manufacturing process of rotationally molded fuel tanks, the fuel tank may vary in size and shape by up to 7% of the manufacturer's original listed capacity.