



Installation Instructions

GL1500 Trunk Side Light Kit 08170-MN530

NOTE: Read instructions thoroughly

Tools Required

- Phillips R screwdriver
 - 8MM open end wrench
1. Remove the trunk lower cover per service manual Instructions. **Fig 1**
 2. Remove the side light case from each side
 3. Remove the three rubber caps from the light case and plug a bulb and socket into each hole. Repeat on the other side. **Fig 2**
 4. Locate the green 2 pin coupler under the trunk and connect the side light connector to it. Do this for both sides.
 5. Turn the ignition switch "ON" and check that both sets of lights come on.
 6. Turn the switch "OFF" and install both side lights.
 7. Install the trunk lower cover.



Rules for safer riding:

- Always follow the instructions given in your owner's manual.
- Weight of the accessory.

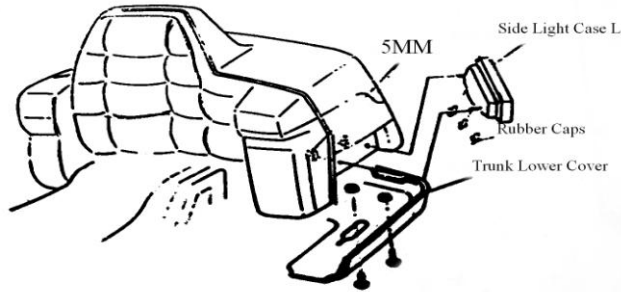


Fig 1

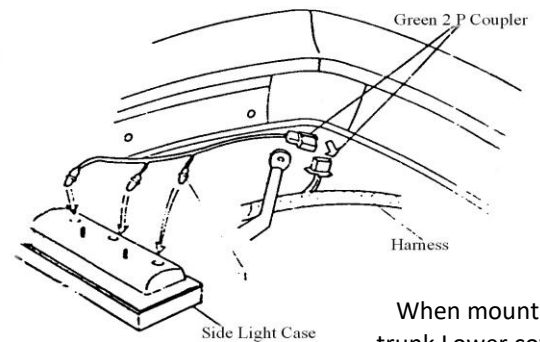


Fig 2

When mounting the trunk Lower cover, take care not to allow any engagement of the harness and couple.

| ITEM | Torque | Value N.M (kg-m) | Ft-Lb |
|--------------------------|---------|---------------------|---------|
| 5MM Bolt and Nut | 4.5-6.0 | (0.45-0.6) | (3-4) |
| 6MM Bolt and Nut | 8-12 | (0.8-1.2) | (6-9) |
| 8MM Bolt and Nut | 18-25 | (1.8-2.5) | (13-18) |
| 10MM Bolt and Nut | 30-40 | (3.0-4.0) | (22-29) |
| 12MM Bolt and Nut | 50-60 | (5.0-6.0) | (36-43) |
| 5MM Screw | 3.5-5.0 | (0.35-0.5) | (3-4) |
| 6MM Screw, SH Bolt | 7-11 | (0.7-1.1) | (5-8) |
| 6MM Flange bolt and nut | 10-14 | (1.0-1.4) | (7-10) |
| 8MM Flange bolt and nut | 20-30 | (2.0-3.0) | (14-22) |
| 10MM Flange bolt and nut | 30-40 | (3.0-4.0) | (22-29) |