



INSTALLATION INSTRUCTIONS PART 18SS2 GL1800 ADJUSTABLE PASSENGER PEGS


Revised 4-13

Note: Read instruction thoroughly before installing.

Note: 2 Spare wavy washers provided.

1. Place bike on center stand.
2. Remove passenger floorboards by removing the two Allen bolts under the board.
3. Install new 8 mm bolts with washers through floorboards, and then install parts in sequence shown and re-install whole assembly. Rotate Eccentric Bushing for up position adjustment. Tighten firmly.

Note: 2 spare wavy washers provided.

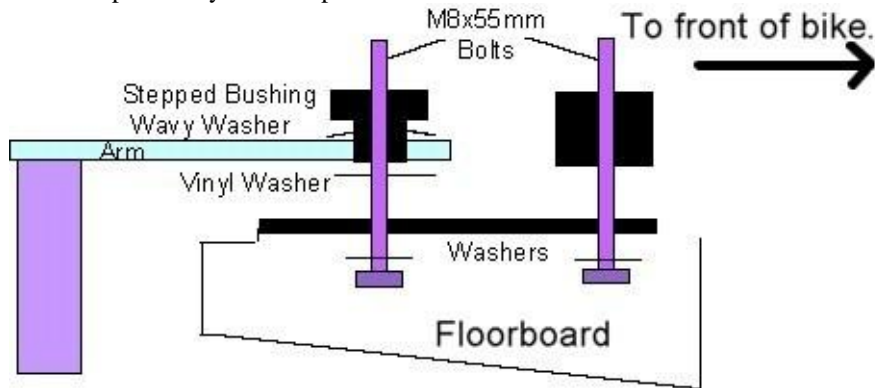

Right Side Shown, Left side similar

