



Powersports Division  
Installation Instructions

aFe P/N: 85-10026

Yamaha YZ125 02-08  
Yamaha YZ250 02-08  
Yamaha YZ250F 03-08  
Yamaha YZ450F 03-08


PARTS LIST:

- [Intake Tube](#)
- Pro DRY S outer Filter (81-90008)
- Pro GUARD 7 inner filter (87-90051)
- Band Clamp

For cleaning instructions, please see: 06-00014 and 06-00074




Step 1

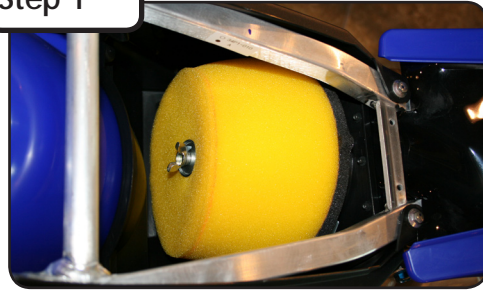

Remove seat to access airbox.

Step 2

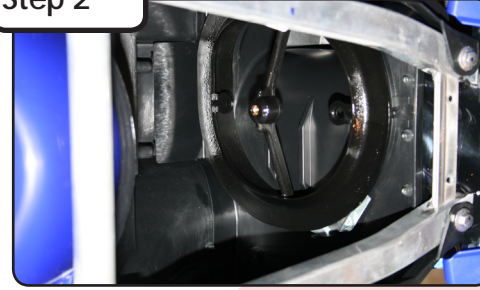

Remove foam air filter.

Step 3



Using a 4mm allen wrench, loosen the clamp around the air boot flange.

Step 4



Carefully pry the plastic foam air filter mount out of the air boot flange. You should be able to remove the mount with your fingers.

Step 5



Install the aries AE2 intake tube into the air boot flange. Start with the bottom of the tube and push up toward the top.

Step 6



Tighten the clamp using the 4mm allen wrench. You may have to remove the spacer in the clamp to completely tighten.

Step 7



Install the inner Pro GUARD 7 filter onto the intake tube.

Step 8



Using a 1/4" socket and ratchet, tighten the hose clamp on the inner Pro GUARD 7 filter.

Step 9



Install the outer Pro DRY S filter onto the inner filter.

Step 10

Reinstall the seat. The installation of your aries AE2 intake kit is now complete. We recommend you clean the outer filter every 4 to 6 rides and the inner filter every 12 to 18 rides depending upon conditions.