

AQ-AK-RG Amplifier Mounting Kit Installation

AQUATIC AV[®]

products with a watertight reputation


Installation Instructions for Harley-Davidson Motorcycle[®] Road Glide Fairings 1998-2013 models

AQ-AK-RG BRACKET FOR USE WITH ROAD GLIDE FAIRINGS & AQ-AD300.2-MICRO AMPLIFIER

For Road Glide models the amplifier will be mounted to the fairing bracket (Harley part number 58530-10).

1. Use the four screws included with the AQ-AK-RG bracket to secure your Aquatic AV AQ-AD300.2-MICRO amplifier to the bracket.
2. Remove the two screws from the left (preferred) or right hand side of the fairing bracket.
3. Secure the AQ-AK-RG amplifier bracket to the fairing bracket with the amplifier facing inwards towards the inner fairing to avoid damage to outer fairing or headlights.
4. Connect speaker leads to the amplifier.
5. Using the AQ-HDAMPEXT-1 included, connect the power and ground wires to the battery.

Aquatic AV AQ-AD300.2-MICRO amplifier sold separately.

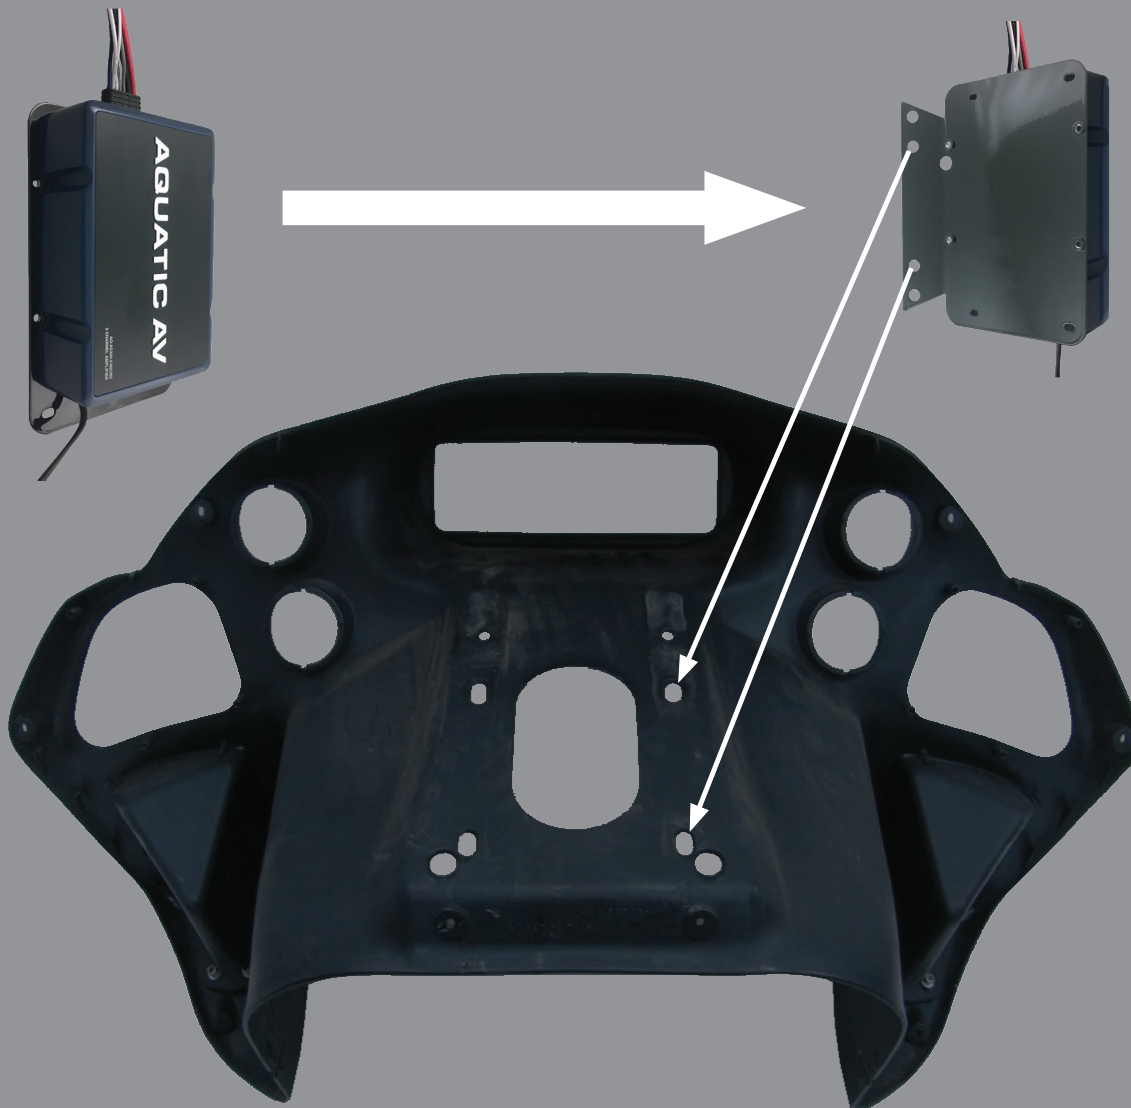

Find out more about electronics we have.