




*High Performance Instrumentation*

# LCD COMPETITION DASH

## THE FUTURE OF AUTOMOTIVE ACQUISITION

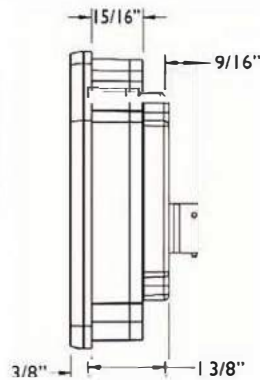

- Fully configurable display to the individual
- IP65 sealed against water and dust intrusion
- 7" LCD panel with unmatched brightness and an optically bonded lens for extreme glare suppression.
- Configurable and user definable warning LED's
- Carbon Composite Housing.

Auto Meter is proud to announce our LCD Competition Dash, the next evolution of driver communication and data acquisition, is now shipping! Designed specifically for the harshest of environments, the carbon composite housing is IP65 sealed against water and dust intrusion and will easily withstand 20g of continuous vibration and 50g of shock. Our 7" LCD panel

ensures easy visibility under all circumstances with a retina level pixel density, unmatched brightness and an optically bonded lens for extreme glare suppression. The display layout is fully configurable to your individual specifications. The system will accommodate four programmable data bus channels (2 CAN and 2 serial) in conjunction with a nearly limitless amount of discrete analog sensors and its integrated 3 Axis Accelerometer. Data collection can occur at up to 1 kHz and the internal memory allows for practically infinite recording time. User definable warnings take advantage of super bright, multicolor LEDs placed around the perimeter of the chassis to alert the driver to critical onscreen information.

<b>ACCESSORIES</b> .....	122-131
<b>AMERICAN MUSCLE</b> .....	68-69, 88-89
<b>AMERICAN PLATINUM</b> .....	87, 90-91
<b>ANTIQUE BEIGE</b> .....	84, 90-91
<b>APPAREL</b> .....	135
<b>ARCTIC WHITE</b> .....	82, 90-91
<b>AUTOGAGE</b> .....	102-105
<b>BATTERY EXTENDER</b> .....	124
<b>BOOST CONTROLLER</b> .....	15
<b>C2 SERIES</b> .....	40-41
<b>CARBON FIBER</b> .....	56-57
<b>CHARTS</b> .....	6-13
<b>CHEVY VINTAGE</b> .....	98
<b>COBALT</b> .....	32-35
<b>COPO CAMARO GAUGES</b> .....	99
<b>CRUISER &amp; CRUISER AO</b> .....	76-79, 88-89
<b>DASH CONTROL</b> .....	14
<b>DATA PRO SOFTWARE</b> .....	95
<b>DESIGNER BLACK</b> .....	83, 90-91
<b>DESIGNER BLACK II</b> .....	80, 88-89
<b>DIESEL TACHOMETER</b> .....	47, 61
<b>DIGITAL</b> .....	66-67
<b>ECOMETER</b> .....	101
<b>ELITE SERIES</b> .....	20-21
<b>ES SERIES</b> .....	38-39
<b>FACTORY MATCH INSTRUMENTS</b> .....	16-19
<b>FORD LICENSED PRODUCTS</b> .....	97
<b>FORD MASTERPIECE SILVER</b> .....	97
<b>GM LICENSED PRODUCTS</b> .....	98
<b>GOLDEN OLDIES</b> .....	86-87, 90-91
<b>GS SERIES</b> .....	36-37
<b>GT SERIES</b> .....	24-25
<b>JEEP LICENSED PRODUCTS</b> .....	100
<b>LIQUID FILLED GAUGES (1-1/2")</b> .....	124
<b>METRIC INSTRUMENTS</b> .....	65
<b>MOPAR LICENSED PRODUCTS</b> .....	96
<b>MOUNTING SOLUTIONS</b> .....	106-121
<b>OLD TYME BLACK</b> .....	86, 90-91
<b>OLD TYME WHITE</b> .....	85, 90-91
<b>OLD TYME WHITE II</b> .....	81, 88-89
<b>PART NUMBER INDEX</b> .....	136
<b>PATENTS &amp; TRADEMARKS</b> .....	132
<b>PHANTOM</b> .....	52-55
<b>PHANTOM II</b> .....	30-31
<b>PODS &amp; PILLARS</b> .....	106-121
<b>PLAYBACK TACHOMETERS</b> .....	94-95
<b>PRESTIGE</b> .....	70-75, 88-89
<b>PRO-COMP</b> .....	58-59
<b>PRO-COMP PRO DASH</b> .....	92
<b>NV SERIES</b> .....	42-43
<b>SHIFT-LITES &amp; WARNING LIGHTS</b> .....	122-123
<b>SPECIFICATIONS</b> .....	133-134
<b>SPEK-PRO</b> .....	22-23
<b>SPORT-COMP</b> .....	48-51
<b>SPORT-COMP II</b> .....	28-29
<b>TACHOMETER ADAPTERS &amp; ACCESSORIES</b> .....	101
<b>TIRE PRESSURE GAUGES</b> .....	131
<b>TRADITIONAL CHROME &amp; COBRA</b> .....	62-63
<b>ULTRA-LITE</b> .....	44-47
<b>ULTRA-LITE II</b> .....	26-27
<b>ULTRA-NITE</b> .....	64
<b>WIDEBAND</b> .....	4
<b>Z-SERIES</b> .....	60-61

# AUTO METER GAUGE TECHNOLOGY

In the Auto Meter gauge offering, you'll find three very different meter movements used in the construction of our instruments. These are Short Sweep Electric (SSE), Full Sweep Mechanical (FSM) and Digital Stepper Motor (DSM). Here we'll touch upon the key differences between them and help to clarify which works best for each type of application and why.

The first type we will discuss, and probably most popular, are our Short Sweep Electric gauges. At the heart of these gauges is Auto Meter's tried and true air core meter movement. An air core, at its essence, is a small magnetic core with copper windings around it that will move in relationship to voltage it sees. This is regulated by an electronic sending unit, which will change its resistance to ground based on the reading. As a temperature or pressure changes, the resistance the gauge measures and thereby the voltage the air core sees varies dictating that the indicator move to a calibrated position on the dial. These gauges are physically differentiated from the other two by their use of a smaller percentage of the dial (90° of rotation), hence "short sweep". Needle movement will most often start around the 9 o'clock position and move to the 3 o'clock position at full scale. Like all Auto Meter instruments, the SSE gauges are designed to be incredibly robust. Our air cores, custom wound in house in Sycamore, are designed to deal with high levels of continuous vibration and incidental shock. It represents a durable, affordable solution that is ideal for most street and mild race applications.

Of note on the air core gauges. There is no return spring or direct physical connection to the zero point on the instrument. As such, when power is removed (ie the vehicle is turned off), it may not always return to zero. This is consistent throughout all of our electronic gauges and allows for an incredibly responsive and fast pointer movement (air core tachs are capable of moving from 0 to 10k rpm in 333 milliseconds). It is not uncommon to see a new gauge in the box where the indicator is not zeroed out. This is totally normal and not indicative of any failure. Because these types of gauges rely heavily on accurate resistance measurements of the sending unit, a good ground is imperative for the best possible results during installation. The gauge will only be as accurate as its ground is good. We recommend a chassis or engine block ground point. A SSE gauge with an inadequate gauge ground will oftentimes read higher than it should, particularly with temperature gauges as they operate over a very wide resistance scale. The sending units SSE gauges utilize are "self grounding", meaning they find their path to ground through the threads or the body of the sending unit. This design does not play well with Teflon tape on the threads as it will impede the path to ground and will often manifest as a sluggish response or a gauge that reads lower than it should. A small dab of liquid Teflon will provide insurance against leaks without the potential for erroneous readings. The sending units do utilize a tapered pipe thread, so leaks are not typically a problem, even without any thread compound whatsoever.

A properly installed SSE gauge will return accuracies levels no worse than +/- 5% at full deflection. While this is often much better, because of the shorter scale and decreased dial resolution in relationship to our full sweep offerings, the pointer width is a limiting factor in how accurately the gauge displays its reading.

The next type of instrument we'll touch on are our Digital Stepper Motor gauges. These highly advanced instruments represent the pinnacle of individual gauge technology and provide the highest possible levels of accuracy, precision, response and durability. Each instrument is controlled by a microprocessor on a circuit board printed in house, which allows for incredibly quick calculations as well as a number of other features not seen in the other gauge types. These gauges utilize race proven sending units for the ultimate in accuracy, no more than +/- 1%. These solid state sending units are the same ones used in many high end data acquisition products. In fact, many of them can simultaneously be used to provide data streams to a logger or standalone engine management system. To further increase accuracy, every time the gauge is powered up it will zero calibrate to assure that even as it wears over a lifetime, it will always remain as accurate as it was the day it was built. These gauges utilize 270° of the dial, making them very easy to read, even at small levels of change. Included with each DSM gauge is a wiring harness specific to the instrument and included sender. These harnesses also provide a ground for the sending unit, so there aren't any concerns about the sending unit ground through the threads affecting instrument accuracy. We still prefer liquid Teflon to the tape, but these also have the bonus of being able to be easily installed even in composite and other non-grounded materials.

Many of our DSM gauges, such as the Elite and SpekPro lines, also include a number of other great features. Because they are microprocessor controlled, these gauges can recall the highest value measured over a period of time (exactly like you'd see in a "tattle tale" tachometer). They will also have user configurable warnings, wherein the instrument will change its lighting at different points on the dial to better communicate certain conditions to the driver. These particular gauges have a high and/or low warning point (depending on series and parameter monitored) in addition to their normal operating color. When either of these warning points are exceeded by a configurable percentage, the gauge will begin to flash to further call attention to itself. You can see these gauges in action in every televised NASCAR race. The instruments used professionally by the teams are off the shelf units with a couple of the features disabled in order to comply with the sanctioning body's rules.

Taking the feature set a step further, these instruments also feature Auto Meter's Pro Control outputs. This allows the gauge to control external devices based on the reading. For example, a water temperature gauge could be used to control electronic fans. Here's a cool example of something we did in the shop recently. One of our techs lost an engine due to oil pump failure. Once the new engine was in, we were able to measure 4 psi of oil pressure being made by just the starter motor. We configured the gauge to not allow the computer to come online until the gauge saw 4 psi of oil pressure. This allowed for us to prime the engine reducing wear and tear during startup. Better yet, should he experience this issue again while out on the track, the gauge would automatically shut down the vehicle if it were to read less than 4 psi, saving the cost of a third engine in one season.

While more expensive than the other gauge types, the DSM gauges represent a great value to the professional and semi pro racer. Because they so easily communicate critical information to the driver, offer unparalleled accuracy and in many cases automatically trigger key condition based events, these gauges can easily be the difference between a lost race and a lost engine. The driver stays more focused on the task at hand, confident that should a condition outside the norm pop up, they'll be warned and be able to easily see exactly what that condition is. There is, quite simply, not a more accurate or durable instrument solution available from any manufacturer, at any price.

The final type of gauge movement we'll touch on are our traditional Full Sweep Mechanical gauges. These gauges make their measurement directly. For example, an oil pressure gauge has a physical oil line running up to the back of the gauge. A temperature gauge will use a long capillary tube, similar to an old style glass thermometer. A bulb on the end of this tube is heated and a ether gas, encapsulated within the tube expands, pushing the meter movement forward and displaying the temperature. The advantage to this is they can be run completely without electricity (only the light requires any power). A vehicle shut off in the pits will still display the current temperature. While best suited for race applications, FSM gauges are not as ideal a solution for street applications because of the fluids being passed through the firewall. The physical connections necessary are often more bulky and difficult to install as well. The most common contradiction we see to this rule is with boost or air pressure gauges, where a simple air line is run to the gauge, rather than a heated fluid or flammable liquid. A FSM fuel pressure gauge will need to be mounted outside of the vehicle for safety or a gauge isolator will need to be used. These gauges do use the entire 270° of the dial like a DSM gauge and are very easy to read. Accuracy is very good, with no more than a +/- 3% variance at full deflection commonly observed. Based on the scale, a SSE gauge returns very similar real world accuracy. These meter movements are also ruggedized for extreme situations and are even available filled with liquid silicone for additional dampening for use in high shock or vibration environments such as desert racing or drag racing applications that experience tire shake. They tend to cost a bit more than their SSE electric counterparts but do undercut the DSM gauges on price.

Regardless of the choice of movements you make, each Auto Meter gauge is engineered, built and calibrated by our skilled technicians here in Sycamore. We take great pride in offering the finest American instruments in all price points for all applications. With more motorsports wins than all other gauge manufacturers combined, our nearly 60 years of excellence assures you the performance and durability necessary to achieve whatever goals you have for your project.

**DIGITAL STEPPER MOTOR**



**SHORT SWEEP ELECTRIC**



**FULL SWEEP MECHANICAL**



# PRODUCT FEATURES

## WIDEBAND AIR/FUEL RATIO GAUGES

A Wideband Air/Fuel Gauge is one of the most critical instruments on any high performance vehicle. Allowing for real time measurement of your fuel mixture, these gauges are tremendously valuable in helping to safely extract the most power from your engine and keep it running longer. Auto Meter's line of Wideband Air/Fuel gauges provide best in class accuracy and response. With automatic calibration on every startup, you're assured of reliable readings for the life of the sensor (no Free Air calibration ever). All of our Wideband instruments feature analog outputs for easy integration with data acquisition or stand alone engine management systems. The Auto Meter Pro and Pro Plus add compatibility with nearly all fuel types, peak lean recall with alarm and automatic dimming. The Pro Plus goes further with serial data output for tuning or EFI systems and features a Pro Control Output to trigger external devices based on fuel mixture. All of the gauges include a high precision sensor and a wiring harness. Everything you need for most installations (down to the stainless weld in bung for the exhaust) is included in the box.

PRODUCT FEATURES	STREET	ANALOG	PRO	PRO PLUS
MIXTURE DISPLAY TYPE	AFR	AFR	AFR OR LAMBDA	AFR OR LAMBDA
WIDE OPEN THROTTLE LEANEST MIXTURE PEAK RECALL			✓	✓
PROGRAMMABLE LEAN CONDITION ALARM			✓	✓
PROGRAMMABLE 0-4V OUTPUT FOR ECU OR DATA ACQUISITION USE	✓	✓	✓	
PROGRAMMABLE 0-5V OUTPUT FOR ECU OR DATA ACQUISITION USE				✓
DISPLAY RANGE	10:1-17:1	8:1-18:1	PROGRAMMABLE	PROGRAMMABLE
SUITABLE FOR USE WITH GASOLINE POWERED ENGINES	✓	✓	✓	✓
ADJUSTABLE STOICHIOMETRIC POINT FOR USE WITH ALTERNATE FUEL TYPES (ETHANOL, METHANOL, PROPANE, CNG)			✓	✓
DISPLAY TYPE	DIGITAL & LED RADIAL	POINTER	DIGITAL & LED RADIAL	DIGITAL & LED RADIAL
RADIAL BAR GRAPH LED DISPLAY SEGMENTS	16		30	30
DISPLAY BRIGHTNESS ADJUSTMENT	MANUAL	MANUAL	AUTOMATIC	AUTOMATIC
INCLUDES .1 AFR RESOLUTION BOSCH LSU4.2 SENSOR AND WIRING HARNESS	✓	✓	✓	
INCLUDES ADVANCED .1 AFR RESOLUTION BOSCH LSU 4.9 SENSOR AND WIRING HARNESS				✓
SERIAL DATA OUTPUT				✓
PRO-CONTROL OUTPUT				✓

## Instruments

### STREET

AIR/FUEL RATIO WIDEBAND



3379

### ANALOG

AIR/FUEL RATIO WIDEBAND



5770

### PRO

AIR/FUEL RATIO WIDEBAND



4378

## PROGRAMMABLE FUEL LEVEL GAUGES

Planning to replace your fuel level gauge or add a fuel level gauge to an unknown tank and sending unit combination? Our Programmable Fuel Level gauges are the best solution. These 270 degree sweep digital stepper motor gauges come pre-programmed to work with the 7 most common preset sending unit values in the industry. In the event that your sending unit values do not match one of these presets, these gauges feature easy programming that allows you to tailor the gauge scale precisely to your set-up with no frustration or added cost. Ideal for Imports, Modern Muscle, and Street Rods! (Works with combinations up to 280 DHMS)



## ELECTRIC PROGRAMMABLE SPEEDOMETERS

Looking to replace your speedometer? Our Electric Programmable Speedometers are the ticket! Simple wiring connections and easy to use push button programming make installation and calibration a snap. Compatible with most OE vehicle speed sensors, as well as aftermarket speed pulse generators. Auto Meter Electric Programmable Speedometers can be easily recalibrated at any time for any gear or wheel & tire changes you may make to your vehicle. Compatible with 5289 GPS Module for calibration free installation.



## PERIMETER INCANDESCENT LIGHTING

Auto Meter instruments with Perimeter Incandescent Lighting utilize white light bulbs to spill soft light around the edges of the instrument dial and reflected off of a three dimensional pointer design for night time illumination that's easy on the eyes. Red and Green bulb covers are included to allow you to customize the illumination color. If you're looking for more color with these instruments, check out our Replacement LED bulbs in the Accessories section. Available in Red, Green, Blue, Amber, & White LED bulbs draw less current, produce brighter colored light, are more vibration resistant and are longer lasting than conventional bulbs.



(Shown with White LED Lighting)

## HI-DEF THROUGH DIAL & FULL DIAL LED LIGHTING

Auto Meter instruments with Hi-Def Through Dial & Full Dial LED Lighting feature bright, crisp, and distinctly illuminated numbers, increments, and a glowing lit pointer! Our Hi-Def style Through Dial & Full Dial LED Lighting is the brightest available, utilizing special composite dials, surface mount LEDs, and a patented lit pointer design to provide maximum visibility and readability day or night! Illumination colors are standard/unchangeable unless specifically noted otherwise (Elite & Spek-Pro). LED replacement bulbs not compatible with Through Dial & Full Dial LED lit designs.



## DUAL RANGE TACHOMETERS

Dual-Range Tachometers from Auto Meter feature a compressed lower RPM scale and an expanded upper scale for enhanced clarity and extreme resolution where it counts! These tachometers are ideal for high-revving motors that spend most of their time in the upper rev band, such high performance applications include drag & road racing, circle track, and drift vehicles. Dual-Range tachometers also feature Memory/Recall so that you can review the highest RPMs achieved while you were out on the track from the comfort of the pits.



## WARNING & SHIFT LITE

When fractions of a second count, and 1 psi of boost separates big power from big problems, use Auto Meter instruments featuring Warn and Shift-Lite functions to nail every shift point and tune your ride to perfection! Created with the driver in mind, instruments with Warn and Shift-Lite functions have easy to use push button & dial-in accuracy so each warning and shift point is an exact match for your vehicle and driving style. Super Bright incandescent bulbs & LEDs built into instruments with these features provide an instant visual alert to critical conditions (ideal for noisy high performance and race vehicles), and can make the difference between a checkered flag and an expensive DNF!



## LAUNCH LITE

Improve reaction times and nail launch RPMs with tachometers and Digital Pro Shift lights from Auto Meter featuring our patented Launch Lite! Dial in exact launch RPM with easy push button programming, then keep your eyes on the tree and let Launch Lite show you when you're at the correct launch RPM.

Here's how it works!

Stage your vehicle with the Launch Lite feature active:

- Launch Lite/Shift light will turn off when engine RPM drops below your launch point
- Launch Lite/Shift light will light solid when engine RPM is at your launch point
- Launch Lite/Shift light will flash rapidly if engine RPM raises above your launch point



# TACHOMETERS

## PEDESTAL MOUNT TACHOMETERS

DESCRIPTION	RANGE	SIZE 3-3/4"	SIZE 2-5/8"	SIZE 3-3/4"	SIZE 5"	AUTOGAGE	CARBON FIBER	CHEVY BOWTIE	COBALT	COBRA	CAMARO	C2	ES	FORD RACING	GM PERFORMANCE	GS
AUTOGAGE-BLACK	6K RPM	X				2306										
AUTOGAGE-BLACK	8K RPM	X				2305										
AUTOGAGE-BLACK	8K RPM			X		2300, 2301										
AUTOGAGE-WHITE	8K RPM			X		2303, 2304										
DIESEL	5K RPM	X														
EXT. SHIFT-LITE	8K RPM			X		2309										
EXT. SHIFT-LITE	8K RPM				X	233905										
EXT. SHIFT-LITE	10K RPM				X	233904, 233911	4899	3699-00406	6299	880445	7299	5999	880118/880281 CobraJet	5899-00406/07	3899	
INT. SHIFT-LITE	10K RPM				X	233903										
DIESEL, MEMORY	6K RPM				X											
MEMORY	9K RPM				X											
MEMORY	10K RPM			X												
MEMORY	10K RPM				X	233902, 233907										
MEMORY	11 K RPM				X											
MEMORY & SHIFT-LITE	10K RPM				X	233906										
MEMORY 2 STG SHIFT-LITE	9K RPM				X											
MEMORY 2 STG SHIFT-LITE	11 K RPM				X											
MEMORY 2 STG SHIFT-LITE	9K RPM Dual				X											
MEMORY 2 STG SHIFT-LITE	11 K RPM Dual				X											
MEMORY 4 STG SHIFT-LITE	9K RPM				X		6835									
MEMORY 4 STG SHIFT-LITE	11 K RPM				X		6836									
PLAYBACK	9K RPM				X											
PLAYBACK	11 K RPM				X											
ULTIMATE III-BLACK PLAYBACK	9K RPM				X											
ULTIMATE III-BLACK PLAYBACK	11 K RPM				X											
ULTIMATE III-SILVER PLAYBACK	9K RPM				X											
ULTIMATE III-SILVER PLAYBACK	11 K RPM				X											
ULTIMATE DL-BLACK PLAYBACK	9K RPM				X											
ULTIMATE DL-BLACK PLAYBACK	11 K RPM				X											
ULTIMATE DL-SILVER PLAYBACK	9K RPM				X											
ULTIMATE DL-SILVER PLAYBACK	11 K RPM				X											
RETRO SHORT SWEEP	8K RPM			X												
SHIFT-LITE, DIAL	8K RPM			X		2302										
STANDARD	4K RPM		X													
STANDARD	8K RPM			X											5780-00406/07	
STANDARD	8K RPM				X											
STANDARD	10K RPM			X												
STANDARD	10K RPM				X											
TACHOMETER	6K RPM		X													
TACHOMETER	8K RPM		X													

## IN DASH TACHOMETERS

DESCRIPTION	RANGE	SIZE	CARBON FIBER	CHEVY BOWTIE	COBALT	COBRA	C2	COBALT DIGITAL	ES	ELITE	FORD RACING	GM PERFORMANCE	GS	GT
TACH	5K RPM	2-1/16"												
TACH	8K RPM	2-1/16"												
TACH	11 K RPM	2-1/16"												
TACH	8K RPM	3-3/8"												8097
TACH	10K RPM	3-3/8"	4798	3697-00406	6297		7297	6997	5997	5697	880084		3897	
TACH	8K RPM	4"				201004								
MEMORY	10K RPM	5"	4894											
MEMORY	10K RPM Dual	5"												
TACH	8K RPM	5"												8098
TACH	10K RPM	5"	4898		6298		7298					5898-00406/7		
TACH	11 K RPM	5"												

## SPEEDMETER CHARTS (LED LIGHTING & DIGITAL)

DESCRIPTION	RANGE	ELECTRIC PROGRAMMABLE	MECH	GPS	COBALT		COBALT DIGITAL		C2	CHEVY BOWTIE		FORD RACING	ELITE	ES	GS	GT	
					3-3/8"	5"	3-3/8"	3-3/8"		5"	3-3/8"						3-3/8"
SPEEDO	140 MPH			X		6280	6281										
SPEEDO	160 MPH		X			6293			7293								
SPEEDO	160 MPH	X				6288	6289		7288	7289	3688-00406	880082	5688	5988	3888	8088	8089
SPEEDO	180 MPH	X															
SPEEDO	200 MPH	X						6988									

## SPEEDMETER CHARTS (AROUND-THE-DIAL LIGHTING)

RANGE	ELECTRIC PROGRAMMABLE	MECH	REVERSE ROTATION	GPS	CARBON FIBER		COBRA	GM PERF	EEP	PHANTOM		PRO-COMP		SPORT-COMP		TRAD CHROME		ULTRA-LITE		ZSERIES	
					3-3/8"	5"				3-3/8"	5"	3-3/8"	5"	3-3/8"	5"	3-3/8"	5"	3-3/8"	5"		
120 MPH	X									5887				3987				4487			
120 MPH		X							880245	5892		5152		3992	3994	2492		4492		2692	
140 MPH	X			X						5880	5881			3982	3983	2480		4480	4481	2680	
160 MPH	X					4789	4889		5889-00406/7	880244	5888	5889	5189	3988	3989	2489		4488	4489		
160 MPH		X									5893	5895	5153	5154		3995	2494		4493	4495	2694
180 MPH	X			X				201013													
180 MPH		X		X				201005													
190 KPH	X									5887-M				3987-M				4487-M			
200 MPH	X																	4486		4490	
200 MPH		X									5896	5156								4496	
260 KPH	X																			4489-M	



# TACHOMETERS

PEDESTAL MOUNT TACHOMETERS														RANGE	DESCRIPTION	
MOPAR	NY	PHANTOM	PHANTOM II	PEQ-COMP	SPORT-COMP	SPORT-COMP II	ULTRA-LITE	ULTRA-LITE II	TRAD CHROME	Z-SERIES	SIZE 2-3/4"	SIZE 2-5/8"	SIZE 3-3/4"	SIZE 5"		
											X				6K RPM	AUTOGAGE-BLACK
											X				8K RPM	AUTOGAGE-BLACK
													X		8K RPM	AUTOGAGE-BLACK
													X		8K RPM	AUTOGAGE-WHITE
							3788			2888	X				5K RPM	DIESEL
													X		8K RPM	EXT. SHIF-LITE
					3905								X		8K RPM	EXT. SHIF-LITE
880248	7499	5899	7599		3904	3699	3911	4999					X		10K RPM	EXT. SHIF-LITE
					3903								X		10K RPM	INT. SHIF-LITE
					6806								X		6K RPM	DIMKEL MEMORY
					6809								X		9K RPM	MEMORY
					6601		6604						X		10K RPM	MEMORY
		5795											X		10K RPM	MEMORY
					6811								X		11 K RPM	MEMORY
						3906							X		10K RPM	MEMORY & SHIF-LITE
					6851		6856						X		9K RPM	MEMORY 2 STG SHIF-LITE
					6857		6858						X		11 K RPM	MEMORY 2 STG SHIF-LITE
					6852		6854						X		9K RPM Dual	MEMORY 2 STG SHIF-LITE
							6855						X		11 K RPM Dual	MEMORY 2 STG SHIF-LITE
							6832						X		9K RPM	MEMORY 4 STG SHIF-LITE
							6834						X		11 K RPM	MEMORY 4 STG SHIF-LITE
					3966		3964						X		9K RPM	PLAYBACK
					3967		3965						X		11 K RPM	PLAYBACK
							6887						X		9K RPM	ULTIMATE III-BLACK PLAYBACK
							6888						X		11 K RPM	ULTIMATE III-BLACK PLAYBACK
								6882					X		9K RPM	ULTIMATE III-SILVER PLAYBACK
								6886					X		11 K RPM	ULTIMATE III-SILVER PLAYBACK
							6896						X		9K RPM	ULTIMATE DL-BLACK PLAYBACK
							6897						X		11 K RPM	ULTIMATE DL-BLACK PLAYBACK
													X		9K RPM	ULTIMATE DL-SILVER PLAYBACK
													X		11 K RPM	ULTIMATE DL-SILVER PLAYBACK
									2897				X		8K RPM	SHORT SWEEP RETRO
													X		8K RPM	SHIF-LITE, DIAL
										2890		X			4K RPM	STANDARD
										2894		X			8K RPM	STANDARD
		5780			3780		3781		2895				X		8K RPM	STANDARD
					3980								X		8K RPM	STANDARD
				5610	3700								X		10K RPM	STANDARD
					3900		3910						X		10K RPM	STANDARD
										2891			X		6K RPM	TACHOMETER
					3708		3707		2893	2892			X		8K RPM	TACHOMETER

IN DASH TACHOMETERS														SIZE	RANGE	DESCRIPTION			
JEEP	NY	PHANTOM	PHANTOM II	PRO-COMP	SPEK-PRO	SPORT-COMP	SPORT-COMP II	SPORT-COMP DIGITAL	ULTRA-LITE	ULTRA-LITE II	ULTRA-LITE DIGITAL	ULTRA-RED	TRADITIONAL CHROME	Z-SERIES					
					P334328										2697	2-1/4"	5K RPM	TACH	
					P336328										2698	2-1/4"	8K RPM	TACH	
880246						3991									2499	2699	2-1/4"	11 K RPM	TACH
	7497	5897	7597	5161				6397	4497	4997	6597						3-3/8"	8K RPM	TACH
																	3-3/8"	10K RPM	TACH
					6801							4594					4"	8K RPM	TACH
									4494								5"	10K RPM	MEMORY
									4499								5"	10K RPM Dual	MEMORY
					P238328												5"	8K RPM	TACH
	7498	5898	7598	5160		3990	3698		4498	4998							5"	10K RPM	TACH
					P239328												5"	11 K RPM	TACH

## SPEEDOMETER CHARTS (LED LIGHTING & DIGITAL)

NY	PHANTOM II	SPEK-PRO	SPORT-COMP II	ULTRA-LITE II	ULTRA-LITE DIGITAL	SPORT-COMP DIGITAL	#PS	MECH	ELECTRIC PROGRAMMABLE	RANGE	DESCRIPTION					
3-3/8"	5"	3-3/8"	5"	5"	3-3/8"	5"	3-3/8"	5"	3-3/8"	3-3/8"	X				140 MPH	SPEEDO
		7580	7581		3680	3681	4980	4981			X				160 MPH	SPEEDO
7488	7489	7588	7589		3693	3689	4993	4989							160 MPH	SPEEDO
					P230328										180 MPH	SPEEDO
									6588	6388					200 MPH	SPEEDO

## AUTOGAGE GAUGES

DESCRIPTION	RANGE	SILVER W/ PANEL	SHORT SWEEP	FULL SWEEP	ELECTRIC	MECHANICAL	SIZE	1-1/2"	2-1/16"	2-5/8"
BOOST/VACCUUM	30 IN HG/20 PSI			X		X				2310
FUEL LEVEL	0 E/90 F		X		X					2316
FUEL LEVEL	73 E/10 F		X		X					2315
FUEL PRESS	0-15 PSI		X			X				2311
OIL PRESS	0-100 PSI		X		X		2354			
OIL PRESS	0-100 PSI			X		X		2332		2312
OIL PRESS	0-100 PSI		X			X			2360	
OIL TEMP	100-340°F			X		X				2314
PRESSURE	0-100 PSI	X		X		X				2334
TEMPERATURE	140-280°F	X		X		X				2335
VACUUM	30 In. HG			X		X				2337
VOLTMETER	8-18 Volts	X	X		X		2356			2380
VOLTMETER	10-16 Volts		X		X					2319
WATER TEMP	100-280°F		X		X		2355			
WATER TEMP	100-280°F			X		X		2333		2313
WATER TEMP	130-280°F			X		X	2352			
WATER TEMP	130-280°F		X			X		2361		

# GAUGE CHARTS (AROUND-THE-DIAL LIGHTING)

DESCRIPTION	RANGE	FULL SWEEP	SHORT SWEEP ELECTRIC	DSM	MECH	CARBON FIBER		COBRA	GM	JEEP	PHANTOM		PRO-COMP
						2-1/16"	2-5/8"	2-1/16"	2-5/8"	2-1/16"	2-1/16"	2-5/8"	2-5/8"
A/F RATIO, Analog	8:1-18:1 AFR	X		X							5770	5879	
A/F RATIO, Pro	6:1-18:1 AFR-Rich 0-5v	X				4778					5778		
A/F RATIO, Pro Plus	8:1-18:1 AFR	X											
A/F RATIO, Street	Lean-Rich, 0-1v	X									5779		
AIR PRESSURE	0-150 PSI	X			X	4720					5720		
DUAL AIR TEMPERATURE	0-300°F	X		X							5758		
AXLE TEMP	100-250°F		X						880431				
BOOST CONTROLLER	30 IN/HG 30 PSI	X									5782		
BOOST PRESS	0-15 PSI	X		X							5750		
BOOST PRESS	0-15 PSI	X			X						5702	5802	
BOOST PRESS	0-35 PSI	X			X	4704					5704		5404
BOOST PRESS/BLOWER PRESS	0-60 PSI	X			X						5705		5402
BOOST PRESS	0-100 PSI	X			X						5706		
BRAKE PRESS	0-1600 PSI	X		X			4867						
BRAKE PRESS	0-2000 PSI	X			X								5426
CLOCK	Analog 1/2 HR	X						201019			5785	5885	
CYL. HEAD TEMP	140-340°F		X	X									
DIESEL RAIL PRESS	0-30,000 PSI	X		X							5786/5793		
DIFF TEMP	100-250°F		X								5749		
EXHAUST PRESS	0-60 PSI	X			X						5725		
EXHAUST PRESS	0-100 PSI	X			X						5726		
EXHAUST PRESS	0-60 PSI	X			X						5792		
EXHAUST PRESS	0-100 PSI	X			X						5794		
FUEL LEVEL	0 E/30 F		X								5717	5817	
FUEL LEVEL	0 E/90 F		X			4714	4814		5814-00406/7	880243	5714	5814	5415
FUEL LEVEL	16 E/158 F		X			4718	4818	201975			5718		
FUEL LEVEL	240 E/33 F		X			4716	4816	201001			5716	5816	5417
FUEL LEVEL	73 E/10 F		X			4715	4815			880428	5715	5815	5416
FUEL LEVEL (LINEAR)	73 E/10 F		X								5719		
FUEL LEVEL	Programmable	X			X						5710		
FUEL PRESS	0-15 PSI	X		X							5761		5461
FUEL PRESS / Pk&Wrn	0-15 PSI	X		X									
FUEL PRESS	0-15 PSI	X			X	4711	4811					5810	5411
FUEL PRESS/ISO	0-15 PSI	X			X		4813		5813-00406/7			5813	5413
FUEL PRESS	0-30 PSI	X		X							5760		
FUEL PRESS	0-100 PSI	X		X		4763	4863				5763	5863	
FUEL PRESS / Pk&Wrn	0-100 PSI	X		X									
FUEL PRESS	0-100 PSI	X			X	4712	4812		5812-00407		5712	5812	5412
FUEL PRESS	0-1.0 Bar	X			X						5711-M		
FUEL PRESS	0-1.0 Bar	X			X						5763-M		
FUEL PRESS	0-7 Kg/Cm2	X			X								
HOURMETER	8-32 volts		X										
HPOP PRESS	0-4000 PSI FORD PWRSTROKE	X		X							5796		
NITROUS PRESS	0-1600 PSI	X		X		4774					5774		
NITROUS PRESS	0-2000 PSI	X		X		4728	4828		5828-00406/7		5728	5828	
OIL PRESS/Pk&Wrn	0-100 PSI	X		X									
OIL PRESS	0-100 PSI	X	X			4727	4827		5827-00406/7	880240	5727	5827	5427
OIL PRESS	0-100 PSI	X			X	4721	4821	201006	5821-00406/7		5721	5821	5421
OIL PRESS	0-150 PSI	X			X						5723	5823	
OIL PRESS	0-200 PSI	X			X							5822	5422
OIL PRESS	0-7 Bars	X	X								5727-M		
OIL PRESS	0-7 Kg/Cm2	X			X								
OIL PRESS	0-14 Kg/Cm2	X			X								
OIL TEMP	100-250°F		X							880429	5747	5847	
OIL TEMP/Pk&Wrn	100-340°F	X		X									
OIL TEMP	140-280°F	X			X	4741	4841				5741	5841	5441/5443
OIL TEMP	140-300°F		X			4748	4848						5447
OIL TEMP	140-340°F	X			X								
OIL TEMP	40-120°C	X			X								
OIL TEMP	60-140°C	X			X			201008					
OIL TEMP	60-170°C	X			X						5748-M		
PRESSURE	0-300 PSI	X			X								5423
PRESSURE	0-400 PSI	X			X								5424
PRESSURE	0-600 PSI	X			X								5425
PRNDL +	DIG. GEAR POS. PLUS INDICATOR										5759		
PYROMETER KIT	0-1600°F	X		X		4744					5744	5844	5444
PYROMETER KIT	0-2000°F	X		X							5745		
PYROMETER KIT	0-900°C	X		X							5744-M		
TEMP	140-340°F	X			X								5435
TRANSFER CASE TEMP	100-250°F		X						880430				
TRANS TEMP	100-250°F		X			4757			880260		5757	5857	5457
TRANS TEMP	100-250°F	X		X									
TRANS TEMP	140-280°F	X			X		4851					5851	5451
VACUUM	30 In. HG	X			X	4784	4884				5784	5884	5484
VACUUM	30 In. HG	X			X		4871						
VOLTMETER	8-18 Volts	X	X			4791	4891	201019	5891-00406/7	880242	5791	5891	5492
VOLTMTR/Pk&Wrn	8-18 Volts	X		X									
VOLTMETER	10-16 Volts		X										
VOLTMETER	16-36 Volts		X										
WATER PRESS	0-35psi	X			X								
WATER PRESS	0-60psi	X			X								
WATER PRESS/Pk&Wrn	0-100psi	X		X									

# (AROUND-THE-DIAL LIGHTING) GAUGE CHARTS

SPORT-COMP		TRADITIONAL CHROME	ULTRA-LITE		UL LIQUID FILLED	ULTRA-LITE (UN LIQUID FILLED)			Z-SERIES	FULL SWEEP	SHORT SWEEP ELECTRIC	DSM	MECH	RANGE	DESCRIPTION
2-1/16"	2-5/8"	2-1/16"	2-1/16"	2-5/8"	2-5/8"	2-5/8"	2-5/8"	2-1/16"							
3370	3579		4370	4479					X		X		8-1:8:1 AFR	A/F RATIO, Analog	
			4378						X				64:8:1 AFR-Rich 0-5v	A/F RATIO, Pro	
3397			4397						X				8-1:8:1 AFR	A/F RATIO, Pro Plus	
3379			4379						X				Lean-Rich, 0-lv	A/F RATIO, Street	
3320			4320					2620	X		X		0-150 PSI	AIR PRESSURE	
3358			4358						X				0-300°F	DUAL AIR TEMPERATURE	
										X			100-250°F	AXLE TEMP	
3381			4381					2681	X				30 HG IN 30 PSI	BOOST CONTROLLER	
3350			4350						X		X		0-15 PSI	BOOST PRESS	
3302			4302						X			X	0-15 PSI	BOOST PRESS	
3304	3404		4304	4404				2616	X		X		0-35 PSI	BOOST PRESS	
	3402		4305	4402	4602			2617	X		X		0-60 PSI	BLOWER PRESS/BOOST PRESS	
			4306					2618	X		X		0-100 PSI	BOOST PRESS	
				4467					X		X		0-1600 PSI	BOOST PRESS	
				4426	4626				X		X		0-2000 PSI	BOOST PRESS	
	3585	2585	4385	4485				2632	X				Analog 12 Hr	CLOCK	
3336	3536		4336						X	X	X		140-340°F	CYL. HEAD TEMP	
			4386/4393					2686/2693	X		X		0-30000 PSI	DIESEL RAIL PRESS	
3349			4349					2636	X	X			100-250°F	DIFF. TEMP	
			4325					2611	X		X		0-60 PSI	EXHAUST PRESS	
			4326					2619	X		X		0-100 PSI	EXHAUST PRESS	
			4392					2672	X		X		0-60 PSI	EXHAUST PRESS	
			4394					2674	X		X		0-100 PSI	EXHAUST PRESS	
3317	3517	2517	4317	4417				2648	X	X			0 E/30 F	FUEL LEVEL	
3314	3514	2514	4314	4414				2641	X	X			0 E/90 F	FUEL LEVEL	
3318	3518	2518	4318	4418					X				16 E/158 F	FUEL LEVEL	
3316	3516	2516	4316	4416				2643	X	X			240 E/33 F	FUEL LEVEL	
3315	3515	2515	4315	4415				2642	X	X			73 E/10 F	FUEL LEVEL	
3319		2519						2650	X	X			73 E/10 F	FUEL LEVEL (LINEAR)	
3310			4310						X		X		Programmable	FUEL LEVEL	
3361	3561		4367	4470				2661	X	X	X		0-15 PSI	FUEL PRESS	
3311	3411	2411	4311	4411	4611	4511	4211	2603	X		X		0-15 PSI	FUEL PRESS/Pk&Wrm	
3313	3413	2413	4313	4413					X		X		0-15 PSI	FUEL PRESS/ISO	
			4360					2660	X	X			0-30 PSI	FUEL PRESS	
3363	3563							2663	X	X			0-100 PSI	FUEL PRESS	
			4371	4472					X	X			0-100 PSI	FUEL PRESS/Pk&Wrm	
3312	3412	2412	4312	4412	4612			2612	X	X	X		0-100 PSI	FUEL PRESS	
3311-M			4311-M						X		X		0-10 Bar	FUEL PRESS	
3363-M			4363-M						X		X		0-10 Bar	FUEL PRESS	
3312-I	3412-I								X		X		0-7 Kg/Cm2	FUEL PRESS	
		2587								X			8-32 volts	HOURMETER	
			4396					2696	X	X	X		0-4000 PSI FORD PWRSTROKE	HP OP PRESS	
3374	3574		4374	4474					X		X		0-1600 PSI	NITROUS PRESS	
3328	3428		4328	4428					X		X		0-2000 PSI	NITROUS PRESS	
			4352	4452					X		X		0-100 PSI	OIL PRESS/Pk&Wrm	
3327	3522	2522	4327	4427				2634	X	X			0-100 PSI	OIL PRESS	
3321	3421	2421	4321	4421	4621	4521	4221	2604	X	X	X		0-100 PSI	OIL PRESS	
3323	3423		4323	4423			4223		X		X		0-150psi	OIL PRESS	
3322	3422	2422	4322	4422	4622			2605	X	X	X		0-200 PSI	OIL PRESS	
3327-M			4327-M						X		X		0-7 Bars	OIL PRESS	
	3421-I		4421-I						X		X		0-7 Kg/Cm2	OIL PRESS	
			3322-I						X		X		0-14 Kg/Cm2	OIL PRESS	
3347	3542	2542	4347					2638	X	X			100-250°F	OIL TEMP	
			4340	4440					X		X		100-340°F	OIL TEMP/Pk&Wrm	
3341	3441/3	2441	4341	4441	4641	4541	4241	2609	X		X		140-280°F	OIL TEMP	
3348	3543	2543	4348	4447				2639	X	X			140-300°F	OIL TEMP	
3346			4346						X		X		140-340°F	OIL TEMP	
	3542-M								X	X			40-120°C	OIL TEMP	
3341-M									X		X		60-140°C	OIL TEMP	
3348-M	3543-M		4348-M						X		X		60-170°C	OIL TEMP	
			4424						X		X		0-300 PSI	PRESSURE	
									X		X		0-400 PSI	PRESSURE	
									X		X		0-600 PSI	PRESSURE	
3349			4359										DIG. GEAR POS PLUS INDICATOR	PRNDL +	
3344	3544		4344	4444				2654	X	X	X		0-1600°F	PYROMETER KIT	
			4345						X		X		0-2000°F	PYROMETER KIT	
3344-M			4344-M						X		X		0-900°C	PYROMETER KIT	
			4435						X		X		140-340°F	TEMP	
										X			100-250°F	TRANSFER CASE TEMP	
3357	3552	2552	4357	4457				2640	X	X			100-250°F	TRANS TEMP	
									X		X		100-250°F	TRANS TEMP	
3351	3451	2451	4351	4451				2615	X		X		140-280°F	TRANS TEMP	
3384	3484	2484	4384	4484				2610	X		X		30 In. HG	VACUUM	
									X		X		30 In. HG	VACUUM	
3391	3592	2592	4391	4491			4591	2645	X	X			8-18 Volts	VOLTMETER	
			4383	4483					X		X		8-18 Volts	VOLTMTR/Pk&Wrm	
			2362						X				10-16 Volts	VOLTMETER	
			4307	4407				2651	X	X			16-36 Volts	VOLTMETER	
			4324						X		X		0-35psi	WATER PRESS	
			4368						X		X		0-60psi	WATER PRESS	
									X		X		0-100psi	WATER PRESS/Pk&Wrm	

# GAUGE CHARTS (AROUND-THE-DIAL LIGHTING)

DESCRIPTION	RANGE	FULL SWEEP	SHORT SWEEP ELECTRIC	DSM	MECH	CARBON FIBER		COBRA	GM		JEEP		PHANTOM		PRO-COMP
						2-1/16"	2-5/8"		2-5/8"	2-1/16"	2-1/16"	2-5/8"			
WATER TEMP	100-250°F		X			4737	4837	2-1/16"	5837-00406/7	880241		5737	5837		5437
WATER TEMP/Pk&Wrn	100-260°F	X			X										
WATER TEMP	60-210°F	X			X										5469
WATER TEMP	120-240°F	X			X	4732	4832		5832-00406/7			5732	5832		5432/3
WATER TEMP	140-280°F	X			X	4731	4831					5731	5831		5431
WATER TEMP	50-115°C	X			X										
WATER TEMP	60-140°C	X			X			201007							
WATER TEMP	40-120°C		X									5737-M			

# GAUGE CHARTS (LED LIGHTING & DIGITAL)

DESCRIPTION	RANGE	FULL SWEEP	SHORT SWEEP ELEC	DSM	MECH	C2	CHEVY BOWTIE	COBALT		COBALT DIGITAL	COPO CANARD	ELITE	ES	FACTORY MATCH CHEVY	FACTORY MATCH FORD	FM DODGE 3rd GEN	FM DODGE 4th GEN	FORD RACING	GS
							2-1/16"	2-1/16"	2-1/16"	2-5/8"	2-1/16"		2-1/16"	2-1/16"	2-1/16"	2-1/16"	2-1/16"	2-1/16"	2-1/16"
A/F RATIO, Analog	8:1-18:1 AFR	X		X		7171		6171					5970						3870
A/F RATIO, Pro	6:1-18:1 AFR-Rich, 0.5v	X				7178		6178				5678	5978						3878
A/F RATIO, Pro Plus	8:1-18:1 AFR	X						6197											
A/F RATIO NARROWBAND	Lean-Rich, 0-1v	X				7175	3675-00406	6175											
DUAL AIR TEMP.	0-300°F	X	X					6158											
AMP AMMETER	0-250 Amps Digital	X						6390											
AMP TEMP	0-250°F. Digital	X						6392											
BOOST CONTROLLER	30 in. HG./ 30 PSI	X						6181				2681							
BOOST PRESS	0-30 PSI	X	X			7160		6160											
BOOST PRESS	0-35 PSI	X		X		7104	3604-00406	6104					5904	8304	8404				3804
BOOST PRESS	0-35 PSI	X	X																
BOOST PRESS	0-60 PSI	X	X			7170		6170		6970		5670		8305	8405				
BOOST PRESS	0-60 PSI	X		X		7105	3605-00406	6105					5905				8508	880106	3805
BOOST PRESS	0-100 PSI	X		X		7106		6106									8509		
BOOST PRESS	0-100 PSI	X	X																
BOOST/VAC	30 in. HG./ 20 PSI	X		X		7107	3607-00406	6107	7901				5907				8507		3807
BOOST/VAC	30 in. HG./ 30 PSI	X	X			7159	3657-00406	6159		6959		5677	5959					880074	3859
BOOST/VAC	30 in. HG./ 30 PSI	X		X		7103	3603-00406	6103					5903						3803
BOOST/VAC	30 in. HG./ 45 PSI	X		X		7108		6108	7908										
BOOST/VAC	60 cm/Hg-2 Bar	X	X					6103-M				5903-M							
BRAKE PRESS	0-1600 PSI	X	X																880362
CLOCK	ANALOG 12 HR	X		X		7185		6185											
EXHAUST PRESS	0-60 PSI	X		X													8525		
EXHAUST PRESS	0-100 PSI	X		X													8526		
EXHAUST PRESS	0-60 PSI	X	X														8592		
EXHAUST PRESS	0-100 PSI	X	X														8595		
DIESEL RAIL PRESS	0-30,000 PSI	X	X					6186/6193						8386		8586/8593	8587/8584		
DPIC	-2G - +2G	X						6180											880089
DPSS, Lvl 1	1 STG SHIFT LITE					7187		6187											
DPSS, Lvl 2	5 STG SHIFT LITE					7188		6188											
DPSS, Lvl 3	5 Stg Shift-Lite Plybk																		
FUEL LEVEL	0 E/90 F		X			7113	3613-00406	6113	7914				5913						3813
FUEL LEVEL	240 E/33 F		X			7116		6116	7916				5916						3816
FUEL LEVEL	73 E/10 F		X			7115		6115	7915				5915						880075
FUEL LEVEL	16 E/158 F		X			7118		6118											3815
FUEL LEVEL	Programmable	X	X			7114		6114		6910		5609	5910						880400
FUEL PRESS	0-15 PSI	X	X			7162		6162	7961			5667							880107
FUEL PRESS	0-15 PSI	X		X					7911										
FUEL PRESS	0-30 PSI	X	X					6161						8360			8561		
FUEL PRESS	0-35 PSI	X	X									5661							
FUEL PRESS	0-100 PSI	X	X			7163	3663-00406	6163	7963	6963		5671	5963				8564	880080	3863
HPOP PRESS	0-4000 PSI FORD PWRSTROKE	X	X												8496				3896
NITROUS PRESS	0-1600 PSI	X	X			7174	3674-00406	6174	7974	6974			5974						3874
OIL PRESS	0-100 PSI	X	X			7153	3653-00406	6153	7953			5652	5953						880085
OIL PRESS	0-100 PSI		X			7127	3627-00406	6127	7927	6927			5927						880076
OIL PRESS	0-100 PSI	X		X		7121	3621-00406	6121	7921				5921						3821
OIL PRESS	0-120 PSI	X	X																
OIL PRESS	0-7 Bars		X					6127-M					5927-M						
OIL TEMP	100-300°F	X	X																
OIL TEMP	100-340°F	X	X									5640							
OIL TEMP	140-280°F	X		X					7941										
OIL TEMP	140-280°F	X	X			7156		6156	7956				5956						880079
OIL TEMP	140-300°F		X			7148		6148	7948	6948			5948						3848
PRNDL +	Digital Gear Position Indicator							6150											
PYROMETER KIT	0-1600°F	X	X			7144	3644-00406	6144				5646	5944	8344	8444		8546	880078	3844
PYROMETER KIT	0-2000°F	X	X			7145	6345-00406	6145		6945		5945	8345	8445			8547		3845

## (AROUND-THE-DIAL LIGHTING) GAUGE CHARTS

SPORT-COMP		TRADITIONAL CHROME		ULTRA-LITE		UL LIQUID FILLED	ULTRA-NITE	UN LIQUID FILLED	Z-SERIES	FULL SWEEP	SHORT SWEEP ELECTRIC	DSM	MECH	RANGE	DESCRIPTION
2-1/16"	2-5/8"	2-1/16"	2-1/16"	2-1/16"	2-5/8"	2-5/8"	2-5/8"	2-5/8"	2-1/16"						
3337	3531	2532	4337	4437					2635	X	X			100-250°F	WATER TEMP
			4354	4454						X	X			100-260°F	WATER TEMP/Pr&W/m
	3569		4369	4469						X	X			60-210°F	WATER TEMP
3332/3	3432/3	2432/3	4332/3	4432/3	4632	4532			2607	X		X		120-240°F	WATER TEMP
3331	3431	2431	4331	4431	4631	4531/5			2606	X		X		140-280°F	WATER TEMP
3332-M										X		X		50-115°C	WATER TEMP
	3431-M				4431-M					X		X		60-140°C	WATER TEMP
3337-M			4337-M								X			40-120°C	WATER TEMP

## (LED LIGHTING & DIGITAL) GAUGE CHARTS

GT	MOPAR			NV		PHANTOM II		SPEK-PRO		SPORT-COMP II		SPORT-COMP II DIGITAL		SPORT-COMP II PRO CONTROL		ULTRA-LITE II		ULTRA-LITE DIGITAL		FULL SWEEP	SHORT SWEEP	DSM	MECH	RANGE	DESCRIPTION
2-1/16"	2-1/16"	2-5/8"	2-1/16"	2-1/16"	2-5/8"	2-1/16"	2-1/16"	2-5/8"	2-1/16"	2-1/16"	2-5/8"	2-1/16"	2-1/16"	2-1/16"	2-5/8"	2-1/16"	2-5/8"								
8070				7570		P238328	3670					4970				4970				X		X		8-1-18:1 AFR	A/F RATIO, Analog
			7378	5778			3378					4378				4378				X				6-1-18:1 AFR-Rich, 0-5v	A/F RATIO, Pro
																				X				8-1-18:1 AFR	A/F RATIO, Pro Plus
8079			7375	7575				3675								4975				X				Lean-Rich, 0-lv	NARROWBAND A/F RATIO
																				X		X		0-300°F	DUAL AIR TEMP
																				X				0-250 Amos Digital	AMP. AMMETER
																				X				0-250°F	AMP. TEMP
	880020/34			5782			3381									4381				X				30 IN.HG. 30 PSI	BOOST CONTROLLER
																				X		X		0-30 PSI	BOOST PRESS
8004	880011/25		7304	7504			3604									4904				X		X		0-35 PSI	BOOST PRESS
						P303328														X		X		0-35 PSI	BOOST PRESS
8005						P304328		6370									6570			X		X		0-60 PSI	BOOST PRESS
			7305	7505			3605									4905				X		X		0-60 PSI	BOOST PRESS
			7306	7506			3606									4906				X		X		0-100 PSI	BOOST PRESS
						P305328														X		X		0-100 PSI	BOOST PRESS
8001	880012/26		7307	7507	7801		3607	7601								4907	7701			X		X		30 IN.HG/ 20 PSI	BOOST/VAC
8003			7359	7559		P302328	3659		6359	3677						4959	7701			X		X		30 IN.HG/ 30 PSI	BOOST/VAC
			7303	7503			3603									4903				X			X	30 IN.HG/ 30 PSI	BOOST/VAC
			7306		7808			7608									7708			X		X		30 IN.HG/ 45 PSI	BOOST/VAC
																				X			X	60 cmHg/2 Bar	BOOST/VAC
																				X		X		0-1600 PSI	BRAKE PRESS
			7585				3685									4985				X		X		ANALOG 12 HR	CLOCK
																				X		X		0-60 PSI	EXHAUST PRESS
																				X		X		0-100 PSI	EXHAUST PRESS
																				X		X		0-60 PSI	EXHAUST PRESS
																				X		X		0-100 PSI	EXHAUST PRESS
			7580/7593			P321328														X		X		0-30,000 PSI	DIESEL RAL PRESS
																				X				-26 - +26	DPIC
			7387	5787			3387									4387								1 STG SHIFT LITE	DPSS, Lvl 1
			7388	5788			3388									4388								5 STG SHIFT LITE	DPSS, Lvl 2
							3389									4389								5 Stg Shift-Lite Pytr.	DPSS, Lvl 3
8014			7313	7513	7814		3613	7614								4913	7714			X				0-690 F	FUEL LEVEL
8016			7316	7516	7816		3616	7616								4916	7716			X				240 E33 F	FUEL LEVEL
8015			7315	7515	7815		3615	7615								4915	7715			X				73 E40 F	FUEL LEVEL
			7318	7518												4918				X				16 E/158 F	FUEL LEVEL
8010	880013/27		7310	7510		P312328	3610		6310							4910		6510		X		X		Programmable	FUEL LEVEL
			7362	7561	7861	P315328	3661	7661		3667						4961	7761			X		X		0-45 PSI	FUEL PRESS
					7811			7611									7711			X			X	0-45 PSI	FUEL PRESS
						P316328														X		X		0-30 PSI	FUEL PRESS
																				X		X		0-35 PSI	FUEL PRESS
8063			7363	7563	7863	P314328	3663	7663	6363	3671						4963	7763	6563		X		X		0-100 PSI	FUEL PRESS
																				X		X		0-4000 PSI RORD PYRSTROKE	HPOP PRESS
			7374	7574	7874	P320328	3674	7674	6374	3673						4974	7774	6574		X		X		0-600 PSI	NITROUS PRESS
8053		880249	7353	7553	7853		3653	7653		3652						4953	7753			X		X		0-400 PSI	OIL PRESS
8027	880015/29		7327	7527	7827		3627	7627	6327							4927	7727	6527		X				0-100 PSI	OIL PRESS
8021	880014/28		7321	7521	7821		3621	7621								4921	7721			X		X		0-100 PSI	OIL PRESS
						P325328														X		X		0-120 PSI	OIL PRESS
																				X				0-7 Bars	OIL PRESS
						P322328														X		X		100-300°F	OIL TEMP
										3640										X		X		100-340°F	OIL TEMP
					7841			7641									7741			X		X		140-280°F	OIL TEMP
		880251	7356	7556	7856		3656	7656								4956	7756			X		X		140-280°F	OIL TEMP
			7348	7548	7848		3648	7648	6348							4948	7748	6548		X				140-300°F	OIL TEMP
																	4359							Digital Gear Position Indicator	PRNDL +
8044	880017/31		7344	7544			3644			3646						4944				X		X		0-1600°F	PYROMETER KIT
			7345	7545		P310328	3645		6345	3647						4945		6545		X		X		0-2000°F	PYROMETER KIT

# GAUGE CHARTS (LED LIGHTING & DIGITAL)

DESCRIPTION	RANGE	FULL SWEEP	SHORT SWEEP ELEC	DSM	MECH	C2	CHEVY BOWTIE	COBALT	COBALT DIGITAL	COPO CAHARO	ELITE	ES	FACTORY MATCH CHEVY	FACTORY MATCH FORD	FM DODGE 3rd GEN	FM DODGE 4th GEN	FORD RACING	GS	
						2-1/16"	2-1/16"	2-1/16"	2-5/8"	2-1/16"	2-1/16"	2-1/16"	2-1/16"	2-1/16"	2-1/16"	2-1/16"	2-1/16"	2-1/16"	
PYROMETER KIT	0-900°C	X		X				6144-M				5944-M							
TRANS TEMP	100-250°F		X			7149	3649-00406	6149	7957	6949		5949	8349	8449		8550		3849	
TRANS TEMP	100-300°F	X		X															
TRANS TEMP	100-260°F	X		X		7157	3657-00406	6157				5658	5957	8357	8457		8558	880314	3857
VACUUM	30 In. HG	X			X				7984										
VOLTMETER	0-16 Volts	X		X															
VOLTMETER	8-18 Volts		X			7192	3692-00406	6192	7991	6993		5992						880081	3892
VOLTMETER	8-18 Volts	X		X		7191		6191				5683	5991						3891
VOLTMETER	8-19 Volts, Digital							6391											
WATER PRESS	0-100 PSI	X		X								5668							
WATER PRESS	0-120 PSI	X		X															
WATER PRESS	0-35 PSI	X		X															
WATER TEMP	100-250°F		X			7137		6137	7937	6937		5937						880077	3837
WATER TEMP	100-260°F	X		X		7155	3655-00406	6155	7955			5654	5955					880086	3855
WATER TEMP	120-240°F	X			X	7132	3632-00406	6132	7932				5932						3832
WATER TEMP	140-280°F	X			X	7131		6131	7931				5931						3831
WATER TEMP		X		X															
WATER TEMP	100-340°F	X		X								5655							

# STREET ROD SERIES CHART

5 PIECE KITS		ELEC	MECH	AMERICAN MUSCLE	AMERICAN PLATINUM	ANTIQUE BEIGE	ARCTIC WHITE	CHEVY VINTAGE	CRUISER AD	CRUISER BLACK	DESIGNER BLACK I	DESIGNER BLACK II	FORD MP SILVER	GOLDEN OLDIES	OLD TME WHITE	OLD TME WHITE II	OLD TME BLACK	PRESTIGE BLACK DIAMOND	PRESTIGE ANTIQUE IVORY	PRESTIGE PEARL	
3-1/8" 120 MPH PROGRAMMABLE SPEEDOMETER W/ LCD ODOMETER & 2-1/16" GAUGES	X					1902	1809	1302			1421			1502	1602			1709			
2-1/16" GAUGES: 100°-250° F WATER TEMP, 0-100 PSI OIL PRESS, 240 Ω E - 33 Ω FUEL LEVEL, AND 8-18 VOLTMETER.																					
3-1/8" 120 MPH MECHANICAL SPEEDOMETER W/ WHEEL ODOMETER & 2-1/16" GAUGES	X					1901	1808	1300	1300-00408		1420			1501	1601		1708				
2-1/16" GAUGES: 100°-250° F WATER TEMP, 0-100 PSI OIL PRESS, 240 Ω E - 33 Ω FUEL LEVEL, AND 8-18 VOLTMETER.																					
3-1/8" 120 MPH PROGRAMMABLE SPEEDOMETER W/ WHEEL ODOMETER & 2-1/16" MECHANICAL & ELECTRIC GAUGES	X					1811	1311	1302-00408		1411			880087		1611						
2-1/16" GAUGES: FULL SWEEP 120°-240° F WATER TEMP, FULL SWEEP 0-100 PSI OIL PRESS, 240 Ω E - 33 Ω FUEL LEVEL, AND 8-18 VOLTMETER																					
3-1/8" 160 MPH PROGRAMMABLE SPEEDOMETER W/ LCD ODOMETER & 2-1/16" GAUGES	X					1202															
2-1/16" GAUGES: 100°-250° F WATER TEMP, 0-100 PSI OIL PRESS, 240 Ω E - 33 Ω FUEL LEVEL, AND 8-18 VOLTMETER																					
3-3/8" 120 MPH PROGRAMMABLE SPEEDOMETER W/ LCD ODOMETER & 2-1/16" GAUGES	X								1101	1100		1701			1700	1740	7001	7001	2006		
2-1/16" GAUGES: 100°-250° F WATER TEMP, 0-100 PSI OIL PRESS, 240 Ω E - 33 Ω FUEL LEVEL, AND 8-18 VOLTMETER																					
3-3/8" 120 MPH PROGRAMMABLE GPS SPEEDOMETER W/ LCD ODOMETER & 2-1/16" GAUGES	X					1850	1350			1450				1650		1749					
2-1/16" GAUGES: 100°-250° F WATER TEMP, 0-100 PSI OIL PRESS, 240 Ω E - 33 Ω FUEL LEVEL, AND 8-18 VOLTMETER																					
3-3/8" 120 MPH PROGRAMMABLE SPEEDOMETER W/ WHEEL ODOMETER & 2-1/16" GAUGES	X					1840	1340			1440				1640			2003	2002	2007		
2-1/16" GAUGES: 100°-250° F WATER TEMP, 0-100 PSI OIL PRESS, 240 Ω E - 33 Ω FUEL LEVEL, AND 8-18 VOLTMETER																					
3-1/8" 190 MPH PROGRAMMABLE SPEEDOMETER LED ODOMETER & 2-1/16" GAUGES	X					1809-M	1302-M			1421-M			1602-M								
2-1/16" GAUGES: 100°-250° F WATER TEMP, 0-100 PSI OIL PRESS, 240 Ω E - 33 Ω FUEL LEVEL, AND 8-18 VOLTMETER																					

TACH/SPEEDO COMBO		SIZE	RANGE	ELEC	AMERICAN MUSCLE	ANTIQUE BEIGE	ARCTIC WHITE	DESIGNER BLACK	DESIGNER BLACK II	OLD TME WHITE	OLD TME WHITE II	OLD TME BLACK	PRESTIGE BLACK DIAMOND	PRESTIGE ANTIQUE IVORY	PRESTIGE PEARL
3-3/8"	X	8000 RPM, 120 MPH		X		1881	1381	1481		1681		1781			
		8000 RPM, 120 MPH	X	1295				1291		1290		2091	2090	2095	

DUAL GAUGES		SIZE	DESCRIPTION	RANGE	SHORT SWEEP	ARCTIC WHITE	DESIGNER BLACK	ANTIQUE BEIGE	OLD TME WHITE
3-3/8"	FUEL LEVEL	OIL PRESSURE	240 Ω EMPTY/33 Ω	0-100 PSI	X	1313	1413	1813	1613
3-3/8"	FUEL LEVEL	OIL PRESSURE	0 Ω EMPTY/90 Ω	0-100 PSI	X	1324	1434	1824	1624
3-3/8"	WATER TEMP	VOLTMETER	100°-250° F	8-18 VOLTS	X	1330	1430	1830	1630

SPEEDOMETER AND TACHOMETER																					
SIZE	DESCRIPTION	RANGE	ELEC	MECH	AMERICAN MUSCLE	AMERICAN PLATINUM	ANTIQUE BEIGE	ARCTIC WHITE	CHEVY VINTAGE	CRUISER AD	CRUISER BLACK	DESIGNER BLACK I	DESIGNER BLACK II	FORD MP SILVER	GOLDEN OLDIES	OLD TME WHITE	OLD TME WHITE II	OLD TME BLACK	PRESTIGE BLACK DIAMOND	PRESTIGE ANTIQUE IVORY	PRESTIGE PEARL
3-1/8"	SPEEDOMETER	120 MPH	X			1988	1887	1388	1388-00408		1488			1588	1688			1787			
3-1/8"	SPEEDOMETER	120 MPH		X		1883	1884	1384			1484			1584	1684			1784			
3-3/8"	SPEEDOMETER	120 MPH	X				1880	1380		1186	1187	1480	1286		1680	1287	1780	2086	2087	2084	
3-3/8"	SPEEDOMETER	190 KMH METRIC	X				1887-M	1388-M				1487-M			1688-M						
3-3/8"	GPS SPEEDOMETER	120 MPH	X				1849	1349				1449			1649		1749				
3-3/8"	SPEEDOMETER	120 MPH WHEEL ODO.	X				1879	1379				1479			1679		1779	2088	2089	2085	
3-3/8"	SPEEDOMETER	160 MPH	X		1288																
3-3/8"	SPEEDOMETER	260 KMH METRIC	X		1288-M																
5"	SPEEDOMETER	120 MPH	X				1889	1389				1489			1689		1789				
5"	SPEEDOMETER	160 MPH	X		1289																
2-1/16"	TACHOMETER	7000 RPM	X			1994	1897	1397				1497			1694		1797				
3-1/8"	TACHOMETER	7000 RPM	X			1995	1898	1398	1398-00408			1498			1595		1695		1798		
3-3/8"	TACHOMETER	8000 RPM	X		1298		1890	1390		1196	1195	1490	1296		1690	1297	1790	2096	2097	2098	
3-3/8"	TACHOMETER	8000 RPM	X		1299		1899	1399				1499			1699		1799				

## (LED LIGHTING & DIGITAL) GAUGE CHARTS

GT	MOPAR			NV		PHANTOM II			SPEK-PRO		SPORT-COMP II		SPORT-COMP II PRO CONTROL		ULTRA-LITE II		ULTRA-LITE DIGITAL		FULL SWEEP	SHORT SWEEP	DSM	MECH	RANGE	DESCRIPTION
2416	2416	253	2416	2416	253	2416	2416	253	2416	2416	253	2416	253	2416	2416									
	880019/33		7349	7549	7857					3649	7657	6349			4949	7757	6549	X	X			0-900°C	PYROMETER KIT	
						P342328												X	X	X		100-250°F	TRANS TEMP	
		880359	7357	7557						3657					3658	4957		X	X			100-300°F	TRANS TEMP	
					7884						7684					7784		X		X		100-260°F	TRANS TEMP	
						P344328												X		X		30 In. HG	VACUUM	
8092	880021/35	880252	7392	7592	7891					3692	7691	6393			4992	7791	6593	X	X			0-16 Volts	VOLTMETER	
8091					7591					3691					3683	4991		X		X		8-18 Volts	VOLTMETER	
																		X		X		8-19 Volts, Digital	VOLTMETER	
						P345328												X		X		0-100 PSI	WATER PRESS	
																		X		X		0-120 PSI	WATER PRESS	
																		X		X		0-35 PSI	WATER PRESS	
8037	880016/30		7337	7537	7837					3657	7637	6337			4937	7737	6537	X	X			100-250°F	WATER TEMP	
8055	880018/32	880250	7355	7555	7855					3655	7655				4955	7755		X	X			100-260°F	WATER TEMP	
8032			7332	7532	7832					3632	7632				4932	7732		X		X		120-240°F	WATER TEMP	
8031			7331	7531	7831					3631	7631				4931	7731		X		X		140-280°F	WATER TEMP	
																		X		X		WATER TEMP		
																		X		X		100-340°F	WATER TEMP	

TACH/SPEEDO COMBO				SIZE	RANGE	COBALT DIGITAL	SPORT-COMP DIGITAL	ULTRA-LITE DIGITAL
				3-3/8"	10K RPM 260 MPH	6987	6387	6587

MINI MONSTER TACHOMETERS				SIZE	RANGE	COBALT	CHEVY BOWTIE	COBALT DIGITAL	C2	ELITE	ES	GS	NV	PHANTOM II	SPORT-COMP DIGITAL	SPORT-COMP II	ULTRA-LITE II	ULTRA-LITE DIGITAL
				3-3/4"	10K RPM	6290	3699-00406	6999	7290	5690	5990	3890	7390	7590	6399	3690	4990	6599

## STREET ROD SERIES CHART

QUAD GAUGE KITS		ELEC	AMERICAN MUSCLE	ANTIQUE BEIGE	ARCTIC WHITE	CHEVY VINTAGE	DESIGNER BLACK	DESIGNER BLACK II	OLD TIME BLACK	OLD TIME WHITE	OLD TIME WHITE II	PRESTIGE BLACK DIAMOND	PRESTIGE ANTIQUE IVORY	PRESTIGE PEARL
3-3/8"	QUAD GAUGE & ELECTRIC PROGRAMMABLE SPEEDO	X	1202	1800	1308		1408		1700	1600				
5"	QUAD GAUGE & ELECTRIC PROGRAMMABLE SPEEDO	X		1803	1303	1303-00408	1403		1703	1603				
3-3/8"	QUAD GAUGE & TACH/SPEEDO COMBO	X		1820	1309		1409		1720	1620				
5"	QUAD GAUGE & TACH/SPEEDO COMBO	X						1204			1203	2005	2090	2008

QUAD GAUGES		SIZE 3-3/8"	SIZE 5"	AMERICAN MUSCLE	ANTIQUE BEIGE	ARCTIC WHITE	DESIGNER BLACK	DESIGNER BLACK II	OLD TIME BLACK	OLD TIME WHITE	OLD TIME WHITE II	PRESTIGE BLACK DIAMOND	PRESTIGE ANTIQUE IVORY	PRESTIGE PEARL
QUAD GAUGE: 0-100 PSI OIL PRESSURE 100°-250° F WATER TEMPERATURE, 8-18 VOLTMETER, 240 Ω E - 33 Ω F FUEL LEVEL		X			1812	1312	1412		1612		1713			
			X	1212	1810	1310	1410	1211	1610	1210	1710	2011	2010	2019
QUAD GAUGE: 0-100 PSI OIL PRESSURE 100°-250° F WATER TEMPERATURE, 8-18 VOLTMETER, 0 Ω E - 90 Ω F FUEL LEVEL		X			1814	1314	1414		1614		1714			
			X	1225	1819	1319	1419	1224	1619	1213	1719	2012	2009	2020

GAUGES		FULL SWEEP	SHORT SWEEP	DSM	MECH	AM MUSCLE	AMERICAN PLATINUM	ANTIQUE BEIGE	ARCTIC WHITE	CHEVY VINTAGE	CRUISER AD	CRUISER BLACK	DESIGNER BLACK	DESIGNER BLACK II	GOLDEN OLDS	GT	OLD TIME WHITE	OLD TIME WHITE II	OLD TIME BLACK	MASTER PIECE ROVER	PRESTIGE BLACK DIAMOND	PRESTIGE ANTIQUE IVORY	PRESTIGE PEARL
2-1/16"	AIR/FUEL															8079							
2-1/16"	BOOST/WAC								1372				1472										
2-1/16"	BOOST/WAC																						
2-1/16"	BOOST/WAC																						
2-1/16"	CLOCK								1284	1986	1885	1385			1185	1184	1485		1586	1686		1785	
2-1/16"	FUEL LEVEL PRGRMBLE														1109	1108					880351		
2-1/16"	FUEL LEVEL								1214	1904	1815	1315			1113	1104	1415		1504	1604		1715	2014
2-1/16"	FUEL LEVEL								1215	1905	1816	1316			1115	1105	1416		1505	1605		1716	
2-1/16"	FUEL LEVEL								1217	1906	1817	1317	1317-00408		1117	1107	1417	1206	1506	1606	1216	1717	2016
2-1/16"	FUEL LEVEL								1907	1818	1318						1418		1507	1607		1718	2017
2-1/16"	FUEL LEVEL								1218														
2-1/16"	OIL PRESSURE								1226	1928	1827	1327	1327-00408		1128	1126	1427	1228	1528	1628	1227	1727	880352
2-1/16"	OIL PRESSURE								1253						1153	1152							
2-1/16"	OIL PRESSURE								1219														
2-1/16"	PRNDL +								1821	1321													
2-1/16"									1860	1360													
2-1/16"	VOLTMETER								1294	1992	1891	1391	1391-00408		1193	1191	1491	1293	1592	1692	1292	1791	880354
2-1/16"	VOLTMETER								1282						1183	1182							
2-1/16"	WATER TEMP								1236	1938	1837	1337	1337-00408		1138	1136	1437	1238	1538	1638	1237	1737	880353
2-1/16"	WATER TEMP								1255						1155	1154							
2-1/16"	WATER TEMP								1232														

# DASH CONTROL

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

Auto Meter's remarkable DashControl™ utilizes your vehicle's factory display(s) to provide performance information without modification. Available for certain vehicles with a Driver Information Center (DIC), DashControl™ plugs into the OBDII port and enables you to monitor an extensive list of vehicle specific performance parameters. Customize the display pages to display performance data you want, where you want it in the vehicle. Because there is no modification to any of the vehicle's computer systems, it's 100% warranty friendly and reversible simply by unplugging the device. It's the easiest, most integrated solution for gauges yet, and takes only seconds to install.

DashControl™ offers customizable alerts as well. Water temp getting too hot or oil pressure dropping? DashControl™ can activate your factory warning chime and display an alert in the DIC at any value you set. Customization is incredibly easy using our intuitive configuration software. Multiple pages of real time data, such as horsepower, torque, 0-60 time, transmission temp, boost pressure, and intake temp. Better still, the system is expandable to add up to two additional analog inputs for parameters not monitored by your vehicle's computer systems.

- Quick and easy plug and play application
- Easy to use monitoring options controlled by vehicle's door lock switches
- Two optional 0-5 volt analog inputs for additional aftermarket senders
- OBDII compatible with select GM vehicles
- No modification of the vehicle's computer system, 100% warranty friendly
- Customizable alerts using the vehicle's warning chime for any set value



Instrument Cluster



Pop Up Display



Console Display



DASH CONTROL	MODEL NUMBER
DASH CONTROL, CHEVROLET CORVETTE 2005-2013	DL1010U
DASH CONTROL, CHEVROLET CAMARO 2010-2015	DL1020U
DASHCONTROL, CHEVROLET CRUZE 2011-2015	DL1030U
DASHCONTROL, SILVERADO/SIERRA/TAHOE/SUBURBAN/YUKON 2007-2013 (GMT900), GAS	DL1040U
DASHCONTROL, TAHOE/SUBURBAN/YUKON/YUKON XL/ESCALADE 2007-2014, GAS	DL1040U
DASHCONTROL, SILVERADO/SIERRA DIESEL 2007.5-2014 (GMT900), DIESEL	DL1045U
DASHCONTROL, CHEVROLET COBALT 2005-2010	DL1050U
DASHCONTROL, PONTIAC SOLSTICE 2006-2010	DL1050U
DASHCONTROL, SATURN SKY 2007-2010	DL1050U
DASHCONTROL, CHEVROLET HHR 2006-2011	DL1050U
DASHCONTROL, CADILLAC CTS 2008-2014	DL1060U
DASHCONTROL, CADILLAC CTS-V 2008-2015	DL1060U
DASHCONTROL, SILVERADO/SIERRA 2014-2016, GAS	DL1061U
DASHCONTROL, TAHOE/SUBURBAN/YUKON/YUKON XL/ESCALADE 2015-2016, GAS	DL1061U
DASHCONTROL, SILVERADO/SIERRA 2015-2016, DIESEL	DL1065U
DASHCONTROL, CHEVROLET CORVETTE 2014-2016	DL1066U



GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

# BOOST CONTROLLER

## FEATURING:

### High/Low Boost Modes

Essentially two different, configurable boost settings that can be switched between with the push of a button. Perfect for the daily driver/weekend warrior, power can be called upon only when you need it striking the perfect balance between performance and efficiency.

### Boost By RPM/Boost By Gear

Integrating Auto Meter's most advanced digital tachometer circuit, your boost curve can be tuned precisely at 500 RPM increments to minimize wheelspin and put more power to the ground. Taking it a step further, you can even custom tailor boost levels to individual transmission gears for the ultimate in control.

### One Touch Gear Capture

Because our Boost Controller looks at not only engine speed, but also vehicle speed, you can instantly capture each gear with the push of a button. Simply drive normally in your chosen gear and hit the capture button. Our advanced algorithms determine your exact gear in real time based on the ratio of these two inputs.

### Peak Recall

One touch recall of the highest boost pressure seen during a given time period.

### Configurable Warnings w/ Overboost Protection

Easy to set parameters provide a full face warning if boost pressure moves beyond your settings. The warning doubles in speed if you pass it by 2 psi or more. The controller can also automatically return the system to wastegate spring pressure in the instance of overboost conditions, potentially averting catastrophic damage to your engine.

### Pro Control Output

Using your boost measurements, the Auto Meter Boost Controller can automatically trigger external devices such as water/methanol, injection, intercooler sprayer, or nitrous solenoids at a given boost pressure level, either on the high or low end of the scale.

### Pro Control Input

Not only will the Auto Meter Boost Controller control external devices, it can also be controlled by external devices such as the Auto Meter Pro Plus Wideband. Any ground signal sent to the Pro Control input will immediately back boost levels down to wastegate spring pressure.

### Display

Highly versatile, boost pressure can be read in inHG/PSI, cmHG/BAR or kPa. Real time barometric compensation can also be turned on or off to account for changes in altitude and environmental conditions.

### Data Logger Output

It has traditionally been a huge challenge to log both vacuum and boost. Our revolutionary approach to measurement allows for simple, configurable scale logging of both in either PSIA (absolute) or PSIG (gauge display)

### Tach/Speed Signal Diagnostic

As both signals are critical to extracting the most from your Boost Controller, both signals feature real time on board diagnostics to verify the presence of proper signals. Taking it one step further, if the signal is interrupted during operation, the gauge will provide a warning.

### A Comprehensive Package

Everything from the gauge to the wiring harness and sensor to the electronic boost control solenoid is included in the package. There are no additional pieces necessary to purchase to install and take advantage of every function **with most applications.**



3381

Putting together the most advanced feature set ever seen in a Boost Controller, Auto Meter has redefined the category. Packaged in a familiar and easy to install 2 1/16" gauge housing, this cutting edge device offers some of the most powerful functions ever assembled for safely extracting the most performance possible from your forced induction application. Intuitive programming right through the gauge (no separate software or laptop is necessary) makes setup and use incredibly easy. Power is nothing without control.

BOOST CONTROLLER	RANGE	DIGITAL STEPPER MOTOR	INFO
		2 1/16"	
COBALT	30 IN. HG/30 PSI	6181	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS 'BOOST CONTROL SOLENOID'
PHANTOM/PHANTOM II	30 IN. HG/30 PSI	5782	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS 'BOOST CONTROL SOLENOID'
SPORT-COMP/ SPORT-COMP II	30 IN. HG/30 PSI	3381	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS 'BOOST CONTROL SOLENOID'
ULTRA-LITE/ ULTRA-LITE II	30 IN. HG/30 PSI	4381	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS 'BOOST CONTROL SOLENOID'
Z-SERIES	30 IN. HG/30 PSI	2681	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS 'BOOST CONTROL SOLENOID'

= DIGITAL GAUGE



Auto Meter Performance Products

**GO TO OUR  
WEBSITE TO SEE  
OUR FULL LINE  
OF HIGH PERFORMANCE  
INSTRUMENTS**

**Instruments**




RAM GEN 4 GAUGES		DIGITAL STEPPER MOTOR	FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	INFO
GAUGES	RANGE	2 1/2"	2 1/4"	2 1/4"	
BOOST	0-35 PSI	—	8507	—	35 PSI INCLUDES 10' NYLON TUBING, UNIVERSAL T-FITTING AND 1/8" AND 1/4" NPT FITTINGS 60 PSI INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST	0-60 PSI	—	8508	—	
BOOST	0-100 PSI	—	8509	—	INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
FUEL PRESSURE	0-30 PSI	8561	—	—	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
FUEL PRESSURE	0-100 PSI	8564	—	—	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
FUEL RAIL PRESSURE*	0-30 PSI	8594	—	—	2007.5 & NEWER DODGE CUMMINS 6.7L*
PYROMETER/EGT	0-1,600°F	8546	—	—	INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS.
PYROMETER/EGT	0-2,000°F	8547	—	—	
TRANSMISSION TEMP	100-250°F	—	—	8550	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
TRANSMISSION TEMP	100-260°F	8558	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS

\* Works with factory sensors/parameters

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

**RAM GEN 3 INSTRUMENTATION (2003-2009)**

**Instruments**

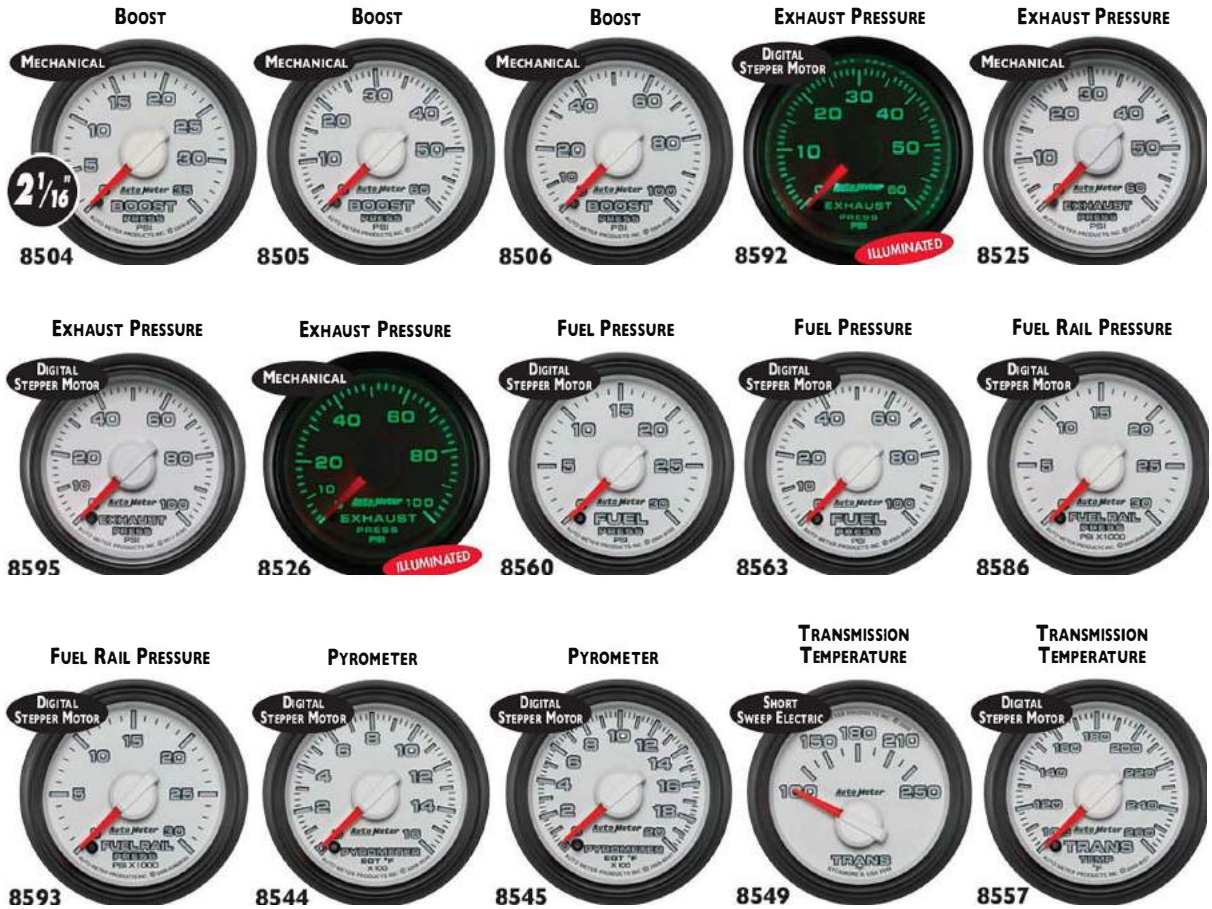

RAM GEN 3 GAUGES		DIGITAL STEPPER MOTOR	FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	INFO
GAUGES	RANGE	2 1/4"	2 1/2"	2 1/4"	
BOOST	0-35 PSI	—	8504	—	35 PSI INCLUDES 10' NYLON TUBING, UNIVERSAL T-FITTING AND 1/8" AND 1/4" NPT FITTINGS 60 PSI INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST	0-60 PSI	—	8505	—	
BOOST	0-100 PSI	—	8506	—	
EXHAUST PRESSURE †	0-60 PSI	8592	8525	—	DIGITAL STEPPER MOTOR GAUGES INCLUDE 1/8" NPT SENDER AND 8' WIRING HARNESS, AND 6' COPPER LINE. MECHANICAL GAUGES INCLUDES 10' NYLON TUBING, 6' COPPER TUBING AND COMPRESSION FITTINGS. MUST BE MOUNTED OUTSIDE THE VEHICLE.
EXHAUST PRESSURE †	0-100 PSI	8595	8526	—	
FUEL PRESSURE	0-30 PSI	8560	—	—	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
FUEL PRESSURE	0-100 PSI	8563	—	—	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
FUEL RAIL PRESSURE *	0-30 PSI	8586	—	—	2003-2007.5 DODGE CUMMINS 5.9L
FUEL RAIL PRESSURE *	0-30 PSI	8593	—	—	2007.5 & NEWER DODGE CUMMINS 6.7L
PYROMETER/EGT	0-1,600°F	8544	—	—	INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS
PYROMETER/EGT	0-2,000°F	8545	—	—	
TRANSMISSION TEMP	100-250°F	—	—	8549	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
TRANSMISSION TEMP	100-260°F	8557	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS

† Particle Trap Kit Model 5375 sold separately \* Works with factory sensors/parameters

**FORD SUPER DUTY  
GEN 1 FACTORY  
MATCH  
INSTRUMENTATION  
(1999-2007)**

**GO TO OUR  
WEBSITE TO SEE  
OUR FULL LINE  
OF HIGH PERFORMANCE  
INSTRUMENTS**

**Instruments**



FORD FACTORY MATCH GAUGES		DIGITAL STEPPER MOTOR	FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	INFO
GAUGES	RANGE	2 1/16"	2 1/16"	2 1/16"	
BOOST	0-35 PSI	—	8404	—	35 PSI INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST	0-60 PSI	—	8405	—	60 PSI INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
FUEL PRESSURE	0-100 PSI	8463	—	—	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
PYROMETER/EGT	0-1,600°F	8444	—	—	INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS: 1/8" NPT
PYROMETER/EGT	0-2,000°F	8445	—	—	
TRANSMISSION TEMP	100-250°F	—	—	8449	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
TRANSMISSION TEMP	100-260°F	8457	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS 1994 - 2007 7.3L & 6.0L FORD POWERSTROKE ENGINES ONLY *
HPOP PRESSURE	0-4,000 PSI	8496	—	—	

\* Works with factory sensors/parameters

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

**SILVERADO/SIERRA  
GEN 1 FACTORY  
MATCH  
INSTRUMENTATION  
(2001-2007)**

**Instruments**



8304



8305



8360



8386



8344



8345



8349



8357

GM FACTORY MATCH GAUGES		DIGITAL STEPPER MOTOR	FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	INFO
GAUGES	RANGE	2 1/16"	2 1/16"	2 1/16"	
BOOST	0-35 PSI	—	8304	—	35 PSI INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING 60 PSI INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST	0-60 PSI	—	8305	—	
FUEL PRESSURE	0-30 PSI	8360	—	—	INCLUDES 1/8" NPT SENDER & 8' HARNESS
FUEL RAIL PRESSURE	0-30,000 PSI	8386	—	—	LB7 & LLY GM DURAMAX ENGINES ONLY *
PYROMETER/EGT	0-1,600°F	8344	—	—	INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS: 1/8" NPT.
PYROMETER/EGT	0-2,000°F	8345	—	—	
TRANSMISSION TEMP	100-250°F	—	—	8349	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
TRANSMISSION TEMP	100-260°F	8357	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS

\* Works with factory sensors/parameters

# ELITE SERIES

7 USER SELECTABLE ILLUMINATION COLORS\*  
WITH FULL FACE HIGH & LOW WARNING

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

HI-DEF™ LED LIGHTING

PIT ROAD SPEED TACHOMETER\*

## Tachometer



6847-05705

BEZEL DARKENED TO SIMULATE NIGHTTIME VIEW

MINI-MONSTER™ TACHOMETER



5690

IN-DASH TACHOMETER



5697

## Speedometer & Gauges

IN-DASH SPEEDOMETER/ELECTRIC



5688

Wideband



5678

Digital Stepper Motor Digital Stepper Motor

OIL PRESSURE



5652

WATER TEMPERATURE



5655

7 USER SELECTABLE ILLUMINATION COLORS\*  
WITH FULL FACE HIGH & LOW WARNING



\* PIT ROAD SPEED TACHOMETER ILLUMINATES WITH WHITE NUMBERS AND INCREMENTS, AND HAS GREEN AND RED WARNING ILLUMINATION.



**ELITE  
SERIES**

**7 USER SELECTABLE ILLUMINATION COLORS\***  
WITH FULL FACE HIGH & LOW WARNING

**ELITE SERIES GAUGES WERE DEVELOPED WITH TOP RACING TEAMS & DRIVERS TO ACHIEVE THE ULTIMATE IN PRECISION, VISIBILITY, & FUNCTIONALITY**

**NEXT GENERATION TECHNOLOGY FEATURES INCLUDE:**

- 7 USER SELECTABLE COLORS TO MATCH VISUAL PREFERENCES OF DRIVER AND VISIBILITY CONDITIONS (\*EXCEPT PIT ROAD TACHS).
- EXPANDED VIEWABLE AREA WHILE STILL MAINTAINING A COMPACT 2 1/16" SIZE.
- POWERED BY ADVANCED CIRCUIT DESIGNS FOR IMPROVED ELECTRICAL NOISE RESISTANCE & PRECISION.
- ELITE SERIES GAUGES FEATURE SOLID STATE, DATA ACQUISITION GRADE SENDING UNITS, DIGITAL STEPPER MOTOR MOVEMENTS, & BRIGHT WHITE "ALWAYS-ON" HI-DEF LED THROUGH THE DIAL ILLUMINATION.
- ENHANCED WITH PRO-CONTROL FUNCTIONALITY, THESE INSTRUMENTS ALLOW DRIVERS TO FOCUS ON THE COMPETITION WHILE THE GAUGES CONTROL KEY VEHICLE SYSTEMS & ALERT THE DRIVER TO WARNING CONDITIONS.
- STREAMLINE YOUR SETUP WITH BUILT-IN PRO-CONTROL CIRCUITS WITH CUSTOM PROGRAMMABLE ACTIVATION & DEACTIVATION POINTS FOR KEY FUNCTIONS LIKE LIGHTS, FANS, SWITCHES, & PUMPS.
- SET CUSTOM ALERT HIGH AND LOW POINTS SPECIFIC TO YOUR VEHICLE & RECEIVE FULL DIAL WARNING NOTIFICATION TO HIGHLIGHT THE NEED FOR DRIVER ATTENTION.
- ACQUIRE DATA FOR LATER REVIEW WITH ONE TOUCH PEAK RECALL FUNCTIONALITY.
- DATA LOGGER 0-5V OUTPUT PROVIDES ECU AND DATA SYSTEMS WITH VITAL INFO.

GAUGES	RANGE	DIGITAL STEPPER MOTOR		INFO
		2 1/16"	2 1/8"	
AIR FUEL RATIO-WIDEBAND	(LEAN-RICH)	5678		PRO INCLUDES BOSCH O <sub>2</sub> SENSOR & WIRING HARNESS *WIDEBAND DOES NOT CHANGE ILLUMINATION COLOR
BOOST	0-60 PSI	5670		INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
BOOST	0-100 PSI	5606		INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
BOOST/VACUUM*	30 IN. HG/30 PSI	5677*		INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS
FUEL LEVEL PROGRAMMABLE*	(0 Q / 280 Q)	5609*		FEATURES 7 PRE-SETS PLUS UNIVERSAL PROGRAMMABLE SETTING
FUEL PRESSURE	0-15 PSI	5667		INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
FUEL PRESSURE	0-35 PSI	5661		INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
FUEL PRESSURE	0-100 PSI	5671		INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
OIL PRESSURE	0-100 PSI	5652		INCLUDES 1/8" NPT SENDER, 1/4" ADAPTER AND 8' WIRING HARNESS
OIL TEMPERATURE	100°-340° F	5640		INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT ADAPTERS, 8' WIRING HARNESS
PYROMETER/EGT*	0°-1600° F	5646*		INCLUDES TYPE K THERMOCOUPLE AND WIRING HARNESS
PYROMETER/EGT*	0°-2000° F	5645*		INCLUDES TYPE K THERMOCOUPLE AND WIRING HARNESS
TRANSMISSION TEMPERATURE	100°-260° F	5658		INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT ADAPTERS, 8' WIRING HARNESS
VOLTMETER	8-18 VOLTS	5683		INCLUDES 8' WIRING HARNESS
WATER PRESSURE	0-100 PSI	5668		INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
WATER TEMPERATURE	100°-260° F	5654		INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT ADAPTERS, 8' WIRING HARNESS
WATER TEMPERATURE	100°-340° F	5655		INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT ADAPTERS, 8' WIRING HARNESS

= DIGITAL GAUGE

\* No Data Acquisition Output

TACHOMETER		OPERATES ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND ELECTRONIC IGNITIONS		
SIZE	RANGE	DESCRIPTION	INFO	PART #
3 3/4"	10,000 RPM	MINI-MONSTER™ PEDESTAL	FULL DIAL COLOR CHANGE FOR SHIFT LIGHT INDICATION. ALSO FEATURES PEAK RECALL.	5690
3 3/8"	10,000 RPM	IN-DASH/SHIFT-LIGHT	FULL DIAL COLOR CHANGE FOR SHIFT LIGHT INDICATION. ALSO FEATURES PEAK RECALL.	5697
3 3/8"	10,000 RPM	PIT ROAD SPEED PEDESTAL	IN-DASH MOUNTING INCLUDES PROGRAMMABLE LED PIT ROAD SPEED / PROGRESSIVE SHIFT LIGHT. REQUIRES PIC #9119 FOR OPERATION.	6606-05705 6847-05705
5"	10,000 RPM	PIT ROAD SPEED PEDESTAL	IN-DASH MOUNTING INCLUDES PROGRAMMABLE LED PIT ROAD SPEED / PROGRESSIVE SHIFT LIGHT. REQUIRES PIC #9119 FOR OPERATION. HAS CANBUS CAPABILITY.	8199-05702
5" x 2.8" x 1"		PIC	REQUIRED FOR (1 RPM RESOLUTION) PROGRAMMING OF PIT ROAD SPEED/SHIFT LIGHT FUNCTIONALITY OF THE 6606-05705, 6847-05705 & 8199-05702	9119

**IN-DASH SPEEDOMETER**

SIZE	RANGE	DESCRIPTION	INFO	PART #
3 3/8"	160 MPH	IN-DASH	PROGRAMMABLE SPEEDMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	5688



- 7 color user-selectable background illuminations (red, blue, green, white, yellow, orange, and violet) with adjustable brightness for day and night - with independent dimming of dial and pointer.
- Configurable "High" and "Low" warnings using three on-instrument-face buttons.
- Pro-Control output enables a 1.5 amp load to activate a relay and trigger your choice of warning lights, external buzzers, fans, pumps, or features such as water/meth nitrous injection.
- Features a peak recall function, which enables the user to review high gauge readings. The highest reading will be stored by the gauge until it is cleared.
- Includes patented light-weight, spin-on bracket and pre-wired harness for simplified installation.
- Patented Wide Angle dial design provides the largest viewable dial available in a 2-1/16" gauge.
- Precision 280° brushless stepper motor movement provides a quiet, fluid, and accurate pointer movement with superior dial resolution.



2003-2009  
RAM  
BOOST 0-60 PSI,  
PYROMETER 0-2000° F

**P72002**

2010-2015  
RAM  
BOOST 0-60 PSI,  
PYROMETER 0-2000° F,  
TRANSMISSION  
TEMPERATURE  
100-300° F

**P73003**



2001-2007  
CHEVY SILVERADO/  
SIERRA  
BOOST 0-35 PSI,  
PYROMETER 0-2000° F

**P72020**



2008-2010  
FORD SUPER DUTY  
BOOST 0-60 PSI,  
PYROMETER 0-2000° F,  
TRANSMISSION  
TEMPERATURE  
100-300° F

**P73012**



2010-2015  
RAM  
BOOST 0-60 PSI,  
PYROMETER 0-2000° F

**P72003**



2001-2007  
SILVERADO/SIERRA  
BOOST 0-35 PSI,  
PYROMETER 0-2000° F,  
TRANSMISSION  
TEMPERATURE  
100-300° F

**P73021**



2008-2010  
FORD SUPER DUTY  
BOOST 0-60 PSI,  
PYROMETER 0-2000° F

**P72012**



2008-2010  
FORD SUPER DUTY  
BOOST 0-60 PSI,  
PYROMETER 0-2000° F,  
TRANSMISSION  
TEMPERATURE  
100-300° F

**P73011**

SPEK PRO MOUNTING SOLUTIONS	PILLAR COLOR	DIAL FACE	A-PILLAR			
			DUAL	DUAL w/speaker hole	TRIPLE	TRIPLE w/speaker hole
DODGE RAM 98-02	BLACK	BLACK	P72000	P72001	P73000	P73001
DODGE RAM 03-09	BEIGE	WHITE	P72002	—	P73002	—
DODGE RAM 10-15	BEIGE	BLACK	P72003	—	P73003	—
FORD SUPER DUTY 99-07	BLACK	BLACK	P72010	—	P73010	—
FORD SUPER DUTY 08-10	BLACK	SILVER	P72012	—	P73012	—
FORD SUPER DUTY 08-10	BLACK	BLACK	P72011	—	P73011	—
CHEVY SILVERADO/SIERRA 01-07	BLACK	BLACK	P72020	—	P73020	—
CHEVY SILVERADD/SIERRA 01-07	BLACK	BLACK	P72021	—	P73021	—



GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

# SPEK PRO

## Tachometers



## Instruments



### IN-DASH TACHOMETERS

OPERATE ON MOST 2-12 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	2 1/16"	5"
8,000 RPM	MEMORY	10' WIRING HARNESS. SEE MOUNTING SOLUTIONS FOR CUP/PEDESTAL OPTIONS.	P334328	P238328
11,000 RPM	MEMORY	10' WIRING HARNESS. SEE MOUNTING SOLUTIONS FOR CUP/PEDESTAL OPTIONS.	P336328	P239328

### IN-DASH SPEEDOMETERS

RANGE	DESCRIPTION	INFO	5"
180 MPH	ELECTRIC (NO ODOMETER)	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	P230328

### 2 1/16" DIGITAL STEPPER MOTOR

GAUGES	RANGE	BLACK FACE	WHITE FACE	INFO
BOOST	0-35 PSI	P303328	---	STAINLESS STEEL SENSOR 10' WIRING HARNESS, NEOPRENE TUBING, UNIVERSAL 'T'
BOOST	0-60 PSI	P304328	P304128	
BOOST	0-100 PSI	P305328	---	
BOOST/VACUUM	30 IN. HG/30 PSI	P302328	P302128	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL LEVEL PROGRAMMABLE	(0 Q/280 Q)	P312328	P312128	
FUEL PRESSURE	0-15 PSI	P315328	P315128	STAINLESS STEEL SENSOR, 10' WIRING HARNESS
FUEL PRESSURE	0-30 PSI	P316328	P316128	
FUEL PRESSURE	0-100 PSI	P314328	P314128	
FUEL RAIL PRESSURE (DIESEL)	3-30K PSI	P321328	---	10' WIRING HARNESS CAN LEARN OEM SENSOR
NITROUS PRESSURE	0-1600 PSI	P320328	---	STAINLESS STEEL SENSOR, 10' WIRING HARNESS
OIL PRESSURE	0-120 PSI	P325328	P325128	
OIL TEMPERATURE	100°-300° F	P322328	P322128	TEMPERATURE SENSOR, 10' WIRING HARNESS
PYROMETER/VEGT	0°-2000° F	P310328	P310128	TYPE 'K' THERMOCOUPLE AND 10' WIRE HARNESS
TRANSMISSION TEMPERATURE	100°-300° F	P342328	---	TEMPERATURE SENSOR, 10' WIRING HARNESS
VOLTMETER	0-16 VOLTS	P344328	P344128	10' WIRING HARNESS
WATER PRESSURE	0-35 PS	P343328	---	STAINLESS STEEL SENSOR, 10' WIRING HARNESS
WATER PRESSURE	0-120 PSI	P345328	---	STAINLESS STEEL SENSOR, 10' WIRING HARNESS
WATER TEMPERATURE	100°-300° F	P346328	P346128	TEMPERATURE SENSOR, 10' WIRING HARNESS

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

HI-DEF™  
LED LIGHTING

**Tachometers**

IN-DASH TACHOMETER



8098

IN-DASH TACHOMETER



8097

IN-DASH SPEEDOMETER/  
ELECTRIC

**Speedometers**



8080

IN-DASH SPEEDOMETER/  
ELECTRIC



8082

**Instruments**

*Wideband*

STREET



8079

*Digital Stepper Motor*

OIL PRESSURE



8053

*Short Sweep Electric*

VOLTMETER



8092

*Full Sweep Mechanical*

WATER TEMPERATURE



8032

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS



GAUGES	RANGE	DIGITAL STEPPER MOTOR	FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	INFO
		2 1/16"	2 1/16"	2 1/16"	
AIR FUEL RATIO-WIDEBAND	(10:1-17:1 AFR)	8079	—	—	STREET INCLUDES BOSCH O2 SENSOR. SEE TECH TIPS FOR MORE INFO
AIR FUEL RATIO-WIDEBAND	(8:1-18:1 AFR)	8070	—	—	ANALOG INCLUDES BOSCH O2 SENSOR. PROGRAMMABLE RANGE. SEE TECH TIPS FOR MORE INFO
BOOST	0-35 PSI	—	8004	—	35 PSI INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST	0-60 PSI	—	8005	—	60 PSI INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST/VACUUM	30 IN. HG/20 PSI	—	8001	—	DIGITAL STEPPER MOTOR GAUGES INCLUDE MAP SENSOR, T-FITTING, AND 8' HARNESS
BOOST/VACUUM	30 IN. HG/30 PSI	—	8003	—	MECHANICAL GAUGES INCLUDE 10' NYLON TUBING AND UNIVERSAL T-FITTING
FUEL LEVEL PROGRAMMABLE	(0 Ω EMPTY/90 Ω FULL)	8010	—	—	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL LEVEL	(0 Ω EMPTY/90 Ω FULL)	—	—	8014	WORKS WITH MOST 1965 TO 1987 CHEV/GM SENDERS
FUEL LEVEL	(73 Ω EMPTY/110 Ω FULL)	—	—	8015	WORKS WITH MOST PRE 1989 (PRE-87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER, SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENSORS.
FUEL LEVEL	(240 Ω EMPTY/33 Ω FULL)	—	—	8016	WORKS WITH 240-33 OHM SENDERS, INCLUDING AUTO METER 3262
FUEL PRESSURE	0-100 PSI	8063	—	—	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
OIL PRESSURE	0-100 PSI	8053	8021	8027	DIGITAL STEPPER MOTOR OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 8' WIRING HARNESS MECHANICAL OIL PRESSURE GAUGES INCLUDE 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS. SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTING.
OIL TEMPERATURE	140°-300° F	—	—	8048	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS
PYROMETER KIT	0°-1600° F	8044	—	—	INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS: 1/8" NPT, WELD-IN FITTING & HOSE CLAMP METHODS
TRANSMISSION TEMPERATURE	100°-250° F	—	—	8049	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
VOLTMETER	8-18 VOLTS	8091	—	8092	5891 INCLUDES 8' WIRING HARNESS
WATER TEMPERATURE	100°-250° F	—	—	8037	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE	100°-260° F	8055	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
WATER TEMPERATURE	120°-240° F	—	8032	—	INCLUDES 6' CAPILLARY TUBING & 1/2" NPT ADAPTER
WATER TEMPERATURE	140°-280° F	—	8031	—	

Ⓢ = DIGITAL GAUGE

**IN-DASH TACHOMETERS**

OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/8"	5"
8,000 RPM	IN-DASH	FOR IN-DASH MOUNTING. SEE MOUNTING SOLUTIONS FOR CUP/PEDESTAL OPTIONS.	8098	8097

**IN-DASH SPEEDOMETERS**

RANGE	DESCRIPTION	INFO	3 3/8"	5"
160 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	8089	8088




**Tachometers**



**Speedometers & Tachometers**



**Instruments**

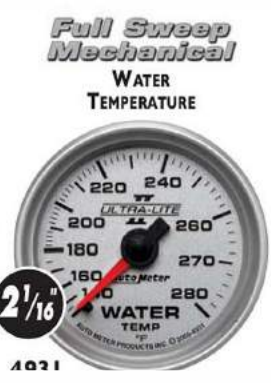



\* - 2 5/8" DIGITAL STEPPER MOTOR MODELS FEATURE PEAK RECALL AND LED WARNING LIGHT

Ⓧ = DIGITAL GAUGE

GAUGES	RANGE	DIGITAL STEPPER MOTOR		FULL SWEEP MECHANICAL		SHORT SWEEP ELECTRIC		INFO
		2 1/16"	2 5/8"	2 1/16"	2 5/8"	2 1/16"	2 5/8"	
AIR FUEL RATIO-NARROWBAND (LEAN-RICH)		4975	—	—	—	—	—	WORKS WITH MOST FACTORY NARROW BAND O2 SENSORS OR MODEL 2244
AIR FUEL RATIO-WIDEBAND PRO (AFR/LAMBDA)		4378	—	—	—	—	—	PRO INCLUDES BOSCH 4.2 O2 SENSOR. SEE WEBSITE FOR MORE INFORMATION. Ⓧ
AIR FUEL RATIO-WIDEBAND ANALOG (8:1-18:1 AFR)		4970	—	—	—	—	—	ANALOG INCLUDES BOSCH 4.2 O2 SENSOR. SEE WEBSITE FOR MORE INFORMATION.
AIR FUEL RATIO-WIDEBAND STREET (10:1-17:1 AFR)		4379	—	—	—	—	—	STREET INCLUDES BOSCH 4.2 O2 SENSOR. SEE WEBSITE FOR MORE INFORMATION. Ⓧ
BOOST	0-35 PSI	—	—	4904	—	—	—	35 PSI INCLUDES 10" NYLON TUBING AND UNIVERSAL T-FITTING
BOOST	0-60 PSI	—	—	4905	—	—	—	60 PSI INCLUDES 10" NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST	0-100 PSI	—	—	4906	—	—	—	INCLUDES 10" NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST CONTROLLER	30 IN. HG/30 PSI	4381	—	—	—	—	—	INCLUDES MAP SENSOR AND UNIVERSAL FITTING AND 8' WIRING HARNESS. Ⓧ
BOOST/VACUUM	30 IN. HG/20 PSI	—	—	4907	7701	—	—	DIGITAL STEPPER MOTOR GAUGES INCLUDE MAP SENSOR, T-FITTING, AND 8' HARNESS
BOOST/VACUUM	30 IN. HG/30 PSI	4959	—	4903	—	—	—	MECHANICAL GAUGES INCLUDE 10" NYLON TUBING AND UNIVERSAL T-FITTING
BOOST/VACUUM	30 IN. HG/45 PSI	—	—	—	7708	—	—	
CLOCK-ANALOG		4985	—	—	—	—	—	12 HOUR. INCLUDES 8' WIRING HARNESS
D-PIC PERFORMANCE GAUGE		4380	—	—	—	—	—	MEASURES G-FORCE, 1/4 MILE TIME, 0-60 TIME, & HORSEPOWER. Ⓧ
FUEL LEVEL PROGRAMMABLE	(0 Q./280 Q.)	4910	—	—	—	—	—	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL LEVEL	(0 Q. EMPTY/90 Q. FULL)	—	—	—	—	4913	7714	WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS
FUEL LEVEL	(16 Q. EMPTY/158 Q. FULL)	—	—	—	—	4918	—	WORKS WITH MOST 1989 (87 MUSTANG) AND LATER FORD
FUEL LEVEL	(73 Q. EMPTY/10 Q. FULL)	—	—	—	—	4915	7715	WORKS WITH MOST PRE-1993 (PRE-87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS
FUEL LEVEL	(240 Q. EMPTY/33 Q. FULL)	—	—	—	—	4916	7716	WORKS WITH 280-33 OHM SENDERS, INCLUDING AUTO METER 3262
FUEL PRESSURE	0-15 PSI	4961	7761*	—	7711	—	—	DIGITAL STEPPER MOTOR INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS.
FUEL PRESSURE	0-100 PSI	4963	7763*	—	—	—	—	MECHANICAL FUEL PRESSURE GAUGES REQUIRE #4 BRAIDED LINE AND MOUNTING CLIP AND MUST BE MOUNTED OUTSIDE THE VEHICLE
NITROUS PRESSURE	0-1600 PSI	4974	7774*	—	—	—	—	
OIL PRESSURE	0-100 PSI	4953	7753*	4921	7721	4927	7727	DIGITAL STEPPER MOTOR OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 8' WIRING HARNESS
OIL TEMPERATURE	140°-280° F	4956	—	—	7741	—	—	MECHANICAL OIL PRESSURE GAUGES INCLUDE 10" NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS.
OIL TEMPERATURE	140°-300° F	—	—	—	—	4948	7748	SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTING.
OIL TEMPERATURE	100°-340° F	—	7756*	—	—	—	—	DIGITAL STEPPER MOTOR GAUGES INCLUDE 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
PRNDL+ GEAR SHIFT INDICATOR GAUGE		4359	—	—	—	—	—	MECHANICAL GAUGES INCLUDE 6" CAPILLARY TUBING & 1/2" NPT ADAPTER.
PYROMETER KIT	0°-1600° F	4944	—	—	—	—	—	SHORT SWEEP ELECTRIC GAUGES INCLUDE 1/8" NPT SENDER, 3/8" & 1/2" NPT ADAPTER.
PYROMETER KIT	0°-2000° F	4945	—	—	—	—	—	INCLUDES UNIVERSAL SENDER - FOR AUTOMATIC TRANSMISSION ONLY. Ⓧ
TRANSMISSION TEMPERATURE	100°-250° F	—	—	—	—	4949	7757	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
TRANSMISSION TEMPERATURE	100°-260° F	4957	—	—	—	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
VACUUM	30 IN. HG	—	—	—	7784	—	—	INCLUDES 10" NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
VOLTMETER	8-18 VOLTS	4991	—	—	—	4992	7791	DIGITAL STEPPER MOTOR GAUGE 4991 INCLUDES 8' WIRING HARNESS
WATER TEMPERATURE	100°-250° F	—	—	—	—	4937	7737	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT ADAPTER
WATER TEMPERATURE	100°-260° F	4955	7755*	—	—	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
WATER TEMPERATURE	120°-240° F	—	—	4932	7732	—	—	
WATER TEMPERATURE	140°-280° F	—	—	4931	7731	—	—	INCLUDES 6" CAPILLARY TUBING & 1/2" NPT ADAPTER

**PEDESTAL MOUNT TACHOMETER**

THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/4"	5"
10,000 RPM	SHIFT-LITE	INCLUDES EXTERNAL INCANDESCENT SHIFT LITE W/AMBER LENS	—	4999
10,000 RPM	MINI MONSTER™	(1-12 CYL), AMBER LED SHIFT LIGHT	4990	—

**IN-DASH TACHOMETERS**

OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/8"	5"
10,000 RPM	IN-DASH	FOR IN-DASH OR CLIP MOUNTING. SEE MOUNTING SOLUTIONS FOR MORE DETAILS.	4997	4998

**IN-DASH SPEEDOMETERS**

RANGE	DESCRIPTION	INFO	3 3/8"	5"
140 MPH	GPS	GPS SPEEDOMETER INCLUDES COMPASS/HEADING, GPS COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME	4980	—
160 MPH	GPS	GPS SPEEDOMETER INCLUDES COMPASS/HEADING, GPS COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME	—	4981
160 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETERS ARE COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5293.	4988	4989
160 MPH	IN-DASH/MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.	4993	—

**Tachometers**




**Speedometers & Tachometers**



**Instruments**





GAUGES	RANGE	DIGITAL STEPPER MOTOR		FULL-SWEEP MECHANICAL		SHORT SWEEP ELECTRIC		INFO
		2 1/16"	2 5/8"	2 1/16"	2 5/8"	2 1/16"	2 5/8"	
AIR FUEL RATIO-NARROWBAND (LEAN-RICH)		3675	—	—	—	—	—	WORKS WITH MOST FACTORY NARROWBAND O2 SENSORS OR MODEL 2244
AIR FUEL RATIO-WIDEBAND PRO (AFR/LAMBDA)		3378	—	—	—	—	—	PRO INCLUDES BOSCH 4.2 O2 SENSOR. SEE WEBSITE FOR MORE INFORMATION
AIR FUEL RATIO-WIDEBAND ANALOG (8:1-18:1 AFR)		3670	—	—	—	—	—	ANALOG INCLUDES BOSCH 4.2 O2 SENSOR. SEE WEBSITE FOR MORE INFORMATION
AIR FUEL RATIO-WIDEBAND STREET (10:1-17:1 AFR)		3379	—	—	—	—	—	STREET INCLUDES BOSCH 4.2 O2 SENSOR. SEE WEBSITE FOR MORE INFORMATION
BOOST	0-35 PSI	—	—	3604	—	—	—	INCLUDES 10" NYLON TUBING AND UNIVERSAL T-FITTING
BOOST	0-60 PSI	—	—	3605	—	—	—	INCLUDES 10" NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST	0-100 PSI	—	—	3606	—	—	—	INCLUDES 10" NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST CONTROLLER	30 IN. HG/30 PSI	3381	—	—	—	—	—	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS. BOOST CONTROL SOLENOID
BOOST/VACUUM	30 IN. HG/20 PSI	—	—	3607	7601	—	—	
BOOST/VACUUM	30 IN. HG/30 PSI	—	—	3603	—	—	—	DIGITAL STEPPER MOTOR GAUGES INCLUDE MAP SENSOR, T-FITTING, AND 8' HARNESS
BOOST/VACUUM w/peak&warning	30 IN. HG/30 PSI	3677	—	—	—	—	—	MECHANICAL GAUGES INCLUDE 10" NYLON TUBING AND UNIVERSAL T-FITTING
BOOST/VACUUM	30 IN. HG/45 PSI	—	—	—	7608	—	—	
CLOCK ANALOG		3685	—	—	—	—	—	12 HOUR. INCLUDES 8' WIRING HARNESS
FUEL LEVEL PROGRAMMABLE (0 Ω EMPTY/200 Ω FULL)		3610	—	—	—	—	—	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL LEVEL (0 Ω EMPTY/90 Ω FULL)		—	—	—	—	3613	7614	WORKS WITH MOST 1985 TO 1997 CHEV/GM SENSORS
FUEL LEVEL (16 Ω EMPTY/150 Ω FULL)		—	—	—	—	3618	—	WORKS WITH MOST 1989 ('87 MUSTANG) AND LATER FORD
FUEL LEVEL (73 Ω EMPTY/110 Ω FULL)		—	—	—	—	3615	7615	WORKS WITH MOST PRE-1989 (PRE-'87 MUSTANG) FORD AND MOST CHRYSLER
FUEL LEVEL (240 Ω EMPTY/33 Ω FULL)		—	—	—	—	3616	7616	WORKS WITH 240-33 OHM SENSORS, INCLUDING AUTO METER 3262
FUEL PRESSURE	0-15 PSI	—	—	—	7611	—	—	REQUIRES #4 BRAIDED LINE AND MOUNTING CUP. MUST BE MOUNTED OUTSIDE THE VEHICLE.
FUEL PRESSURE w/peak&warning	0-15 PSI	3667	7661	—	—	—	—	
FUEL PRESSURE w/peak&warning	0-100 PSI	3671	7663	—	—	—	—	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
NITROUS PRESSURE w/peak&warning	0-1600 PSI	3673	7674	—	—	—	—	
OIL PRESSURE	0-100 PSI	—	—	3621	7621	3627	7627	MECHANICAL LOW PRESSURE GAUGES INCLUDE 10" NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS. SHORT SWEEP ELECTRIC OIL PRESSURE GAUGE INCLUDES 1/8" NPT SENDER AND 1/4" NPT FITTING
OIL PRESSURE w/peak&warning	0-100 PSI	3652	7653	—	—	—	—	DIGITAL STEPPER MOTOR OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER, 8' WIRING HARNESS, & 1/8" TO 1/4" NPT ADAPTER FITTING.
OIL TEMPERATURE w/peak&warning	140°-280° F	3640	—	—	—	—	—	DIGITAL STEPPER MOTOR GAUGES INCLUDE 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS.
OIL TEMPERATURE	140°-300° F	—	—	—	—	3648	7648	MECHANICAL GAUGES INCLUDE 5' CAPILLARY TUBING & 1/2" NPT ADAPTER.
OIL TEMPERATURE	140°-340° F	—	7656	—	—	—	—	SHORT SWEEP ELECTRIC GAUGES INCLUDE 1/8" NPT SENDER, 3/8" & 1/2" NPT ADAPTER.
OIL TEMPERATURE	140°-280° F	—	—	—	7641	—	—	
PRND+ GEAR SHIFT INDICATOR GAUGE		3359	—	—	—	—	—	INCLUDES UNIVERSAL SENDER - FOR AUTOMATIC TRANSMISSION ONLY
PYROMETER KIT w/peak&warning	0°-1600° F	3646	—	—	—	—	—	INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS. 1/8" NPT, WELD-IN FITTING.
PYROMETER KIT w/peak&warning	0°-2000° F	3647	—	—	—	—	—	
TRANSMISSION TEMPERATURE	100°-250° F	—	—	—	—	3649	7657	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
TRANS TEMP w/peak&warning	100°-260° F	3658	—	—	—	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
VACUUM	30 IN. HG	—	—	—	7684	—	—	INCLUDES 10" NYLON TUBING AND UNIVERSAL T-FITTING
VOLTMETER	8-18 VOLTS	—	—	—	—	3692	7691	
VOLTMETER w/peak&warning	8-18 VOLTS	3683	—	—	—	—	—	DIGITAL STEPPER MOTOR GAUGE 3683 INCLUDES 8' WIRING HARNESS
WATER TEMPERATURE	100°-250° F	—	—	—	—	3637	7637	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE w/peak&warning	100°-260° F	3654	7655	—	—	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
WATER TEMPERATURE	120°-240° F	—	—	3632	7632	—	—	
WATER TEMPERATURE	140°-280° F	—	—	3631	7631	—	—	INCLUDES 6' CAPILLARY TUBING & 1/2" NPT ADAPTER

### PEDESTAL MOUNT TACHOMETER

THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/4"	5"
10,000 RPM	SHIFT-LITE	INCLUDES EXTERNAL INCANDESCENT SHIFT LITE W/AMBER LENS	—	3699
10,000 RPM	MINI MONSTER™	(1-12 CYL), AMBER LED SHIFT LIGHT	3690	—

### IN-DASH TACHOMETERS

OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/8"	5"
10,000 RPM	IN-DASH	FOR IN-DASH OR CUP MOUNTING. SEE MOUNTING SOLUTIONS FOR MORE DETAILS.	3697	3698

### IN-DASH SPEEDOMETERS

RANGE	DESCRIPTION	INFO	3 3/8"	5"
140 MPH	GPS	GPS SPEEDOMETER INCLUDES ANTENNA. RALLY NAV DISPLAY SHOWS COMPASS/HEADING, GPS COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME.	3680	—
160 MPH	GPS		—	3681
160 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETERS ARE COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENSORS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	3688	3689
160 MPH	IN-DASH/MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.	3693	—



GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

HI-DEF™ LED LIGHTING

### Tachometers



SHIFT-LITE TACHOMETER

7599



IN-DASH TACHOMETER

7598



IN-DASH TACHOMETER

7597

### Speedometers & Tachometers



IN-DASH SPEEDOMETER/ELECTRIC

7589



IN-DASH GPS SPEEDOMETER/ELECTRIC

7588



MINI MONSTER™ TACHOMETER

7590

### Instruments

Digital Stepper Motor



OIL PRESSURE

7553

Short Sweep Electric



VOLTMETER

7502

Full Sweep Mechanical



WATER TEMPERATURE

7531

WATER TEMPERATURE



7832





GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS



GAUGES	RANGE	DIGITAL STEPPER MOTOR		FULL SWEEP MECHANICAL		SHORT SWEEP ELECTRIC		INFO
		2 1/16"	2 5/8"	2 1/16"	2 5/8"	2 1/16"	2 5/8"	
AIR FUEL RATIO-NARROWBAND (LEAN-RICH)		7575	—	—	—	—	—	WORKS WITH MOST FACTORY NARROW BAND O2 SENSORS OR MODEL 2244 PRO INCLUDES BOSCH 4.2 O2 SENSOR. SEE WEBSITE FOR MORE INFORMATION.
AIR FUEL RATIO-WIDEBAND PRO (AFR/LAMBDA)		5778	—	—	—	—	—	ANALOG INCLUDES BOSCH 4.2 O2 SENSOR. SEE WEBSITE FOR MORE INFORMATION.
AIR FUEL RATIO-WIDEBAND ANALOG (8:1-18:1 AFR)		7570	—	—	—	—	—	STREET INCLUDES BOSCH 4.2 O2 SENSOR. SEE WEBSITE FOR MORE INFORMATION.
AIR FUEL RATIO-WIDEBAND STREET (10:1-17:1 AFR)		5779	—	—	—	—	—	35 PSI INCLUDES 10" NYLON TUBING AND UNIVERSAL T-FITTING
BOOST	0-35 PSI	—	—	7504	—	—	—	60 PSI INCLUDES 10" NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST	0-60 PSI	—	—	7505	—	—	—	INCLUDES 10" NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST	0-100 PSI	—	—	7506	—	—	—	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS. BOOST CONTROL SOLICIT
BOOST CONTROLLER	30 IN. HG/30 PSI	5782	—	—	—	—	—	DIGITAL STEPPER MOTOR GAUGES INCLUDE MAP SENSOR, T-FITTING, AND 8' HARNESS. MECHANICAL GAUGES INCLUDE 10" NYLON TUBING AND UNIVERSAL T-FITTING
BOOST/VACUUM	30 IN. HG/20 PSI	—	—	7507	7801	—	—	
BOOST/VACUUM	30 IN. HG/30 PSI	7559	—	7503	—	—	—	
BOOST/VACUUM	30 IN. HG/45 PSI	—	—	—	7808	—	—	
CLOCK-ANALOG		7585	—	—	—	—	—	12 HOUR. INCLUDES 8' WIRING HARNESS
DIESEL FUEL RAIL PRESS	0-30,000 PSI	7586	—	—	—	—	—	2003-2007 5 Dodge Cummins 5.9L & L87 & LLY GM Duramax engines only *
DIESEL FUEL RAIL PRESS	0-30,000 PSI	7593	—	—	—	—	—	2007.5 & Newer Dodge Cummins 6.7L & LBZ & LMM GM Duramax engines only *
D-PIC PERFORMANCE GAUGE		5781	—	—	—	—	—	MEASURES G-FORCE, 1/4 MILE TIME, 0-60 TIME, & HORSEPOWER
FUEL LEVEL PROGRAMMABLE	(0 Q EMPTY/90 Q FULL)	7510	—	—	—	—	—	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL LEVEL	(0 Q EMPTY/90 Q FULL)	—	—	—	—	7513	7814	WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS
FUEL LEVEL	(16 Q EMPTY/158 Q FULL)	—	—	—	—	7518	—	WORKS WITH MOST 1989 (87 MUSTANG) AND LATER FORD
FUEL LEVEL	(73 Q EMPTY/110 Q FULL)	—	—	—	—	7515	7815	WORKS WITH MOST PRE 1989 (PRE 87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
FUEL LEVEL	(240 Q EMPTY/33 Q FULL)	—	—	—	—	7516	7816	WORKS WITH 240-33 OHM SENDERS, INCLUDING AUTO METER 262
FUEL PRESSURE	0-15 PSI	—	7861*	—	7811	—	—	
FUEL PRESSURE	0-100 PSI	7563	7863*	—	—	—	—	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
NITROUS PRESSURE	0-1600 PSI	7574	7874*	—	—	—	—	
OIL PRESSURE	0-100 PSI	7553	7853*	7521	7821	7527	7827	DIGITAL STEPPER MOTOR OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 8' WIRING HARNESS. MECHANICAL OIL PRESSURE GAUGES INCLUDE 10" NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS. SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTING.
OIL TEMPERATURE	140°-280° F	7556	—	—	7841	—	—	DIGITAL STEPPER MOTOR GAUGES INCLUDE 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
OIL TEMPERATURE	140°-300° F	—	—	—	—	7548	7848	MECHANICAL GAUGES INCLUDE 6 CAPILLARY TUBING & 1/2" NPT ADAPTER
OIL TEMPERATURE	100°-340° F	—	7856*	—	—	—	—	SHORT SWEEP ELECTRIC GAUGES INCLUDE 1/8" NPT SENDER, 3/8" & 1/2" NPT ADAPTER
PRNDL+ GEAR SHIFT INDICATOR GAUGE		5759	—	—	—	—	—	INCLUDES UNIVERSAL SENDER - FOR AUTOMATIC TRANSMISSION ONLY.
PYROMETER KIT	0°-1600° F	7544	—	—	—	—	—	INCLUDES PROBE & 10' THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS: 1/8" NPT.
PYROMETER KIT	0°-2000° F	7545	—	—	—	—	—	
TRANSMISSION TEMPERATURE	100°-250° F	—	—	—	—	7549	7857	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
TRANSMISSION TEMPERATURE	100°-260° F	7557	—	—	—	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
VACUUM	30 IN. HG	—	—	—	7884	—	—	INCLUDES 10" NYLON TUBING AND UNIVERSAL T-FITTING
VOLTMETER	8-18 VOLTS	7591	—	—	—	7592	7891	7591 INCLUDES 8' WIRING HARNESS
WATER TEMPERATURE	100°-250° F	—	—	—	—	7537	7837	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT ADAPTER
WATER TEMPERATURE	100°-260° F	7555	7855*	—	—	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
WATER TEMPERATURE	120°-240° F	—	—	7532	7832	—	—	
WATER TEMPERATURE	140°-280° F	—	—	7531	7831	—	—	INCLUDES 6' CAPILLARY TUBING & 1/2" NPT ADAPTER

\* 2 5/8" Digital Stepper Motor Models Feature Peak Recall and LED Warning Light \* Works with factory sensors/parameters

### PEDESTAL MOUNT TACHOMETER

THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/4"	5"
10,000 RPM	SHIFT-LITE	INCLUDES EXTERNAL INCANDESCENT SHIFT LITE W/AMBER LENS	—	7599
10,000 RPM	MINI MONSTER™	(1-12 CYL), AMBER LED SHIFT LIGHT	7590	—

### IN-DASH TACHOMETERS

OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/8"	5"
10,000 RPM	IN-DASH	FOR IN-DASH MOUNTING. SEE MOUNTING SOLUTIONS FOR CLIP/PEDESTAL OPTIONS	7597	7598

### IN-DASH SPEEDOMETERS

RANGE	DESCRIPTION	INFO	3 3/8"	5"
140 MPH	GPS	GPS SPEEDOMETER INCLUDES COMPASS/HEADING, GPS COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME.	7580	—
160 MPH	GPS	GPS SPEEDOMETER INCLUDES COMPASS/HEADING, GPS COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME.	—	7581
160 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5281 AND 5282 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5283.	7588	7589
160 MPH	IN-DASH/MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.	7596	—

**COBALT™**

GO TO OUR  
WEBSITE TO SEE  
OUR FULL LINE  
OF HIGH PERFORMANCE  
INSTRUMENTS

HI-DEF™  
LED LIGHTING



The best selling and most revered series in the Auto Meter line to feature our award winning Hi-Def, Through-The-Dial LED lighting. With cool blue illumination and a race inspired design that is easy to read in all conditions, these gauges are equally at home in full blown race machines or one off custom builds. Way more than just a great looking gauge, the Cobalt line pioneered our Advanced Digital Stepper Motor Technology for the ultimate in no compromise accuracy, durability and safety. These are serious instruments for serious vehicles that just happen to look spectacular, particularly once the sun goes down.

HI-DEF™  
LED LIGHTING

GO TO OUR  
WEBSITE TO SEE  
OUR FULL LINE  
OF HIGH PERFORMANCE  
INSTRUMENTS

**COBALT™**

## Tachometers

SHIFT-LITE TACHOMETER



6299

IN-DASH TACHOMETER



6298

IN-DASH TACHOMETER



6297

## Speedometers

IN-DASH SPEEDOMETER/ELECTRIC



6289

IN-DASH GPS SPEEDOMETER/  
ELECTRIC



6280

MINI-MONSTER™ TACHOMETER



6290

## Instruments

Digital Stepper  
Motor

WATER  
TEMPERATURE



6155

Short Sweep  
Electric

VOLTMETER



6192

Full Sweep  
Mechanical

BOOST/VAC



6107

WATER  
TEMPERATURE



7931

GAUGES	RANGE	DIGITAL STEPPER MOTOR		FULL MECHANICAL		SHORT SWEEP ELECTRIC		INFO
		2 1/16"	2 5/8"	2 1/16"	2 5/8"	2 1/16"	2 5/8"	
AIR FUEL RATIO-NARROWBAND (LEAN-RICH)		6175	—	—	—	—	—	WORKS WITH MOST FACTORY NARROW BAND SENSORS OR MODEL 2244
AIR FUEL RATIO-WIDEBAND PRO (AFR/LAMBDA)		6178	—	—	—	—	—	PRO INCLUDES BOSCH 4202 SENSOR. SEE WEBSITE FOR MORE INFORMATION
AIR FUEL RATIO-WIDEBAND PRO PLUS (AFR/LAMBDA)		6197	—	—	—	—	—	PRO PLUS INCLUDES BOSCH 44 02 SENSOR. SEE WEBSITE FOR MORE INFORMATION
AIR FUEL RATIO-WIDEBAND ANALOG (8:1-18:1 AFR)		6171	—	—	—	—	—	ANALOG INCLUDES BOSCH 4202 SENSOR. SEE WEBSITE FOR MORE INFORMATION
DUAL AIR TEMPERATURE	0°-300° F	6158	—	—	—	—	—	INCLUDES TWO 3/8" NPT SENDER, & 8' WIRE HARNESS
AMPLIFIER AMMETER	0-250 AMPS	6390	—	—	—	—	—	DIGITAL LED DISPLAY INCLUDES TRANSDUCER
AMPLIFIER TEMPERATURE	0°-250° F	6392	—	—	—	—	—	DIGITAL LED DISPLAY INCLUDES SENDER
BOOST	0-30 PSI	6160	—	—	—	—	—	INCLUDES MAP SENSOR, UNIVERSAL T, AND 8' HARNESS
BOOST	0-35 PSI	—	—	6104	—	—	—	35 PSI INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST	0-60 PSI	6170	—	6105	7905	—	—	DIGITAL STEPPER MOTOR GAUGE INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS 60 PSI MECHANICAL GAUGE INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST	0-100 PSI	—	—	6106	—	—	—	INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST CONTROLLER	30 IN. HG/30 PSI	6181	—	—	—	—	—	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS. BOOST CONTROL SOLENOID
BOOST/VACUUM	30 IN. HG/20 PSI	—	—	6107	7901	—	—	DIGITAL STEPPER MOTOR GAUGES INCLUDE MAP SENSOR, T-FITTING, AND 8' HARNESS
BOOST/VACUUM	30 IN. HG/30 PSI	6159	—	6103	—	—	—	MECHANICAL GAUGES INCLUDE 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST/VACUUM	30 IN. HG/45 PSI	—	—	6108	7908	—	—	
BOOST/VACUUM	60 CM. HG/2.0 BAR	—	—	6103-M	—	—	—	
CLOCK-ANALOG		6185	—	—	—	—	—	12 HOUR. INCLUDES 8' WIRING HARNESS
DIESEL FUEL RAIL PRESSURE	0-30,000 PSI	6186	—	—	—	—	—	2003-2007.5 DODGE CUMMINS 5.9L & L87 & LLY/5M DURAMAX ENGINES ONLY *
DIESEL FUEL RAIL PRESSURE	0-30,000 PSI	6193	—	—	—	—	—	2007.5 & NEWER DODGE CUMMINS 6.7L & L82 & L9M/6M DURAMAX ENGINES ONLY *
DIGITAL PRO-SHIFT SYSTEM-LEVEL 1		6187	—	—	—	—	—	BLUE LED & INDICATORS
DIGITAL PRO-SHIFT SYSTEM-LEVEL 2		6188	—	—	—	—	—	4 STAGE SHIFT POINT, MULTI COLOR LED, AND LAUNCH LITE FEATURE
D-PIC PERFORMANCE GAUGE		6180	—	—	—	—	—	MEASURES G-FORCE, 1/4 MILE TIME, 0-60 TIME & HORSEPOWER
FUEL LEVEL PROGRAMMABLE (0 Ω/290 Ω)		6114	—	—	—	—	—	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL LEVEL (0 Ω EMPTY/50 Ω FULL)		—	—	—	6113	7914	—	WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS
FUEL LEVEL (16 Ω EMPTY/158 Ω FULL)		—	—	—	6118	—	—	WORKS WITH MOST 1969 (FST MUSTANG) AND LATER FORD
FUEL LEVEL (73 Ω EMPTY/10 Ω FULL)		—	—	—	6115	7915	—	WORKS WITH MOST PRE 1989 (PRE 87 MUSTANG FACTORY FORD AND MOST FACTORY CHRYSLER) SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS
FUEL LEVEL (240 Ω EMPTY/33 Ω FULL)		—	—	—	6116	7916	—	WORKS WITH 240-33 OHMS SENDERS, INCLUDING AUTO METER 3262
FUEL PRESSURE	0-15 PSI	6162	7961*	—	7911	—	—	DIGITAL STEPPER MOTOR INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
FUEL PRESSURE	0-30 PSI	6161	—	—	—	—	—	
FUEL PRESSURE	0-100 PSI	6163	7963*	—	—	—	—	
NITROUS PRESSURE	0-1600 PSI	6174	7974*	—	—	—	—	
OIL PRESSURE	0-100 PSI	6153	7953*	6121	7921	6127	7927	DIGITAL STEPPER MOTOR OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 8' WIRING HARNESS MECHANICAL OIL PRESSURE GAUGES INCLUDE 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTING
OIL PRESSURE	0-7 BAR	—	—	—	—	6127-M	—	
OIL TEMPERATURE	140°-280° F	6156	—	—	7941	—	—	DIGITAL STEPPER MOTOR INCLUDE 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS. MECHANICAL GAUGES INCLUDE 6' CAPILLARY TUBING & 1/2" NPT ADAPTER. SHORT SWEEP ELECTRIC GAUGES INCLUDE 1/8" NPT SENDER, 3/8" & 1/2" NPT ADAPTER.
OIL TEMPERATURE	60°-150° C	—	—	—	—	6148-M	—	
OIL TEMPERATURE	140°-300° F	—	—	—	—	6148	7948	
OIL TEMPERATURE	140°-340° F	—	7956*	—	—	—	—	
PRNDL+ GEAR SHIFT INDICATOR GAUGE		6150	—	—	—	—	—	INCLUDES UNIVERSAL SENDER - FOR AUTOMATIC TRANSMISSION ONLY
PYROMETER	0°-900° C	6144-M	—	—	—	—	—	
PYROMETER KIT	0°-1600° F	6144	—	—	—	—	—	INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS: 1/8" NPT, WELD-IN FITTING.
PYROMETER KIT	0°-2000° F	6145	—	—	—	—	—	
TRANSMISSION TEMPERATURE	100°-250° F	—	—	—	—	6149	7957	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
TRANSMISSION TEMPERATURE	100°-260° F	6157	—	—	—	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
VACUUM	30 IN. HG	—	—	7984	—	—	—	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
VOLTMETER	8-18 VOLTS	6191	—	—	—	6192	7991	FULL SWEEP 6191 INCLUDES 8' WIRING HARNESS
VOLTMETER	8-19 VOLTS	6391	—	—	—	—	—	DIGITAL LED DISPLAY INCLUDES 8' WIRING HARNESS
WATER TEMPERATURE	40°-120° C	—	—	—	—	6137-M	—	
WATER TEMPERATURE	100°-250° F	—	—	—	—	6137	7937	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE	100°-260° F	6155	7955*	—	—	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
WATER TEMPERATURE	120°-240° F	—	—	6132	7932	—	—	
WATER TEMPERATURE	140°-280° F	—	—	6131	7931	—	—	INCLUDES 6' CAPILLARY TUBING & 1/2" NPT ADAPTER

\* Works with factory sensors/parameters

\* - 2 5/8" DIGITAL STEPPER MOTOR MODELS FEATURE PEAK RECALL AND RED WARNING LIGHT



GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

**COBALT™**

**PEDESTAL MOUNT TACHOMETER**

5" - OPERATES ON MOST 2, 4, 6, AND 8 CYLINDER ENGINES & ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND ELECTRONIC IGNITIONS  
 MINI-MONSTER - OPERATES ON MOST 1, 2, 3, 4, 6, 8, 10, AND 12 CYLINDER TACHOMETER SIGNALS

RANGE	DESCRIPTION	INFO	3 3/4"	5"
10,000 RPM	SHIFT-LITE	INCLUDES EXTERNAL INCANDESCENT SHIFT LIGHT W/ BLUE LENS	—	6299
10,000 RPM	MINI-MONSTER™	INCLUDES EXTERNAL LED MINI QUICK LITE W/ AMBER LED	6290	—

**IN-DASH TACHOMETERS**

OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/8"	5"
10,000 RPM	IN-DASH	FOR IN-DASH MOUNTING	6297	6298

**IN-DASH SPEEDOMETERS**

RANGE	DESCRIPTION	INFO	3 3/8"	5"
140 MPH	GPS	GPS SPEEDOMETER INCLUDES ANTENNA. RALLY NAV DISPLAY SHOWS COMPASS/ HEADING, GPS COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME.	6280	—
160 MPH	GPS		—	6281
160 MPH	ELECTRIC	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	6288	6289
160 MPH	MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.	6293	—





GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

HI-DEF™ LED LIGHTING

## Tachometers



## Speedometers & Tachometers



## Instruments





GAUGES	RANGE	DIGITAL STEPPER MOTOR	FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	INFO
		2 1/16"	2 1/16"	2 1/16"	
AIR FUEL RATIO-WIDEBAND	(AFR/LAMBDA)	3878	—	—	PRO INCLUDES BOSCH O2 SENSOR. SEE WIDEBAND AIR/FUEL PAGE FOR MORE INFO
AIR FUEL RATIO-WIDEBAND	(8:1-18:1AFR)	3870	—	—	ANALOG INCLUDES BOSCH O2 SENSOR. SEE WIDEBAND AIR/FUEL PAGE FOR MORE INFO
BOOST	0-35 PSI	—	3804	—	35 PSI INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST	0-60 PSI	—	3805	—	60 PSI INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST/VACUUM	30 IN. HG/20 PSI	—	3807	—	DIGITAL STEPPER MOTOR GAUGES INCLUDE MAP SENSOR, T-FITTING, AND 8' HARNESS
BOOST/VACUUM	30 IN. HG/30 PSI	3859	3803	—	MECHANICAL GAUGES INCLUDE 10' NYLON TUBING AND UNIVERSAL T FITTING
DIESEL HPOP PRESSURE	0-4,000 PSI	3896	—	—	1994-07 FORD POWERSTROKE 2.3 & 6.0 L ENGINES*
FUEL LEVEL PROGRAMMABLE	(0 Ω/280 Ω)	3810	—	—	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL LEVEL	(0 Ω EMPTY/90 Ω FULL)	—	—	3813	WORKS WITH MOST 1965 TO 1997 CHEVY/EM SENDERS
FUEL LEVEL	(73 Ω EMPTY/10 Ω FULL)	—	—	3815	WORKS WITH MOST PRE 1968 (PRE 87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER, SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
FUEL LEVEL	(240 Ω EMPTY/33 Ω FULL)	—	—	3816	WORKS WITH 240-33 OHM SENDERS, INCLUDING AUTO METER 328Z
FUEL PRESSURE	0-100 PSI	3863	—	—	
NITROUS PRESSURE	0-1600 PSI	3874	—	—	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
OIL PRESSURE	0-100 PSI	3853	3821	3827	DIGITAL STEPPER MOTOR OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 8' WIRING HARNESS. MECHANICAL OIL PRESSURE GAUGES INCLUDE 12' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS. SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTING.
OIL TEMPERATURE	140°-280° F	3856	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
OIL TEMPERATURE	140°-300° F	—	—	3848	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS
PYROMETER KIT	0°-1600° F	3844	—	—	INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS: 1/8" NPT, WELD-IN FITTING & HOSE CLAMP METHODS.
PYROMETER KIT	0°-2000° F	3845	—	—	
TRANSMISSION TEMPERATURE	100°-250° F	—	—	3849	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
TRANSMISSION TEMPERATURE	100°-260° F	3857	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
VOLTMETER	8-18 VOLTS	3891	—	3892	3891 INCLUDES 8' WIRING HARNESS
WATER TEMPERATURE	100°-250° F	—	—	3837	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE	100°-260° F	3855	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
WATER TEMPERATURE	120°-240° F	—	3832	—	
WATER TEMPERATURE	140°-280° F	—	3831	—	INCLUDES 6' CAPILLARY TUBING & 1/2" NPT ADAPTER

Ⓢ = DIGITAL GAUGE

\* WORKS WITH FACTORY SENSORS/PARAMETERS

PEDESTAL MOUNT TACHOMETER		THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS	3 3/4"	5"
RANGE	DESCRIPTION	INFO		
10,000 RPM	SHIFT-LITE	INCLUDES EXTERNAL INCANDESCENT SHIFT LITE W/AMBER LENS	—	3899
10,000 RPM	MINI MONSTER™	(1-12 CYL), AMBER LED SHIFT LIGHT	3890	—

IN-DASH TACHOMETERS		OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND ELECTRONIC IGNITIONS	3 3/8"
RANGE	DESCRIPTION	INFO	
10,000 RPM	IN-DASH	FOR IN-DASH MOUNTING. SEE MOUNTING SOLUTIONS FOR CUP/PEDESTAL OPTIONS.	3897

IN-DASH SPEEDOMETERS			3 3/8"
RANGE	DESCRIPTION	INFO	
160 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETERS ARE COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	3888



GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

HI-DEF™ LED LIGHTING

### Tachometers



### Speedometers & Tachometers



### Instruments







GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS



GAUGES	RANGE	DIGITAL STEPPER MOTOR	FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	INFO
		2 1/16"	2 1/16"	2 1/16"	
AIR FUEL RATIO-WIDEBAND (AFR/LAMBDA)		5978	—	—	PRO INCLUDES BOSCH O2 SENSOR PROGRAMMABLE RANGE. SEE WIDEBAND AIR/FUEL PAGE FOR MORE INFO <sup>89</sup>
AIR FUEL RATIO-WIDEBAND (8:1-18:1 AFR)		5970	—	—	ANALOG INCLUDES BOSCH O2 SENSOR. RANGE. SEE WIDEBAND AIR/FUEL PAGE FOR MORE INFO
BOOST	0-35 PSI	—	5904	—	26 PSI INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST	0-60 PSI	—	5905	—	60 PSI INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST CONTROLLER	30 IN. HG/30 PSI	2681	—	—	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS 'BOOST CONTROL SOLENOID'
BOOST/VACUUM	30 IN. HG/20 PSI	—	5907	—	DIGITAL STEPPER MOTOR GAUGES INCLUDE MAP SENSOR, T-FITTING, AND 8' HARNESS
BOOST/VACUUM	30 IN. HG/30 PSI	5959	5903	—	MECHANICAL GAUGES INCLUDE 10' NYLON TUBING AND UNIVERSAL T-FITTING
FUEL LEVEL PROGRAMMABLE	(0 Ω/280 Ω)	5910	—	—	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL LEVEL	(0 Ω EMPTY/90 Ω FULL)	—	—	5913	WORKS WITH MOST 1985 TO 1997 CHEV/GM SENDERS
FUEL LEVEL	(73 Ω EMPTY/10 Ω FULL)	—	—	5915	WORKS WITH MOST PRE 1989 (PRE '87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER. SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
FUEL LEVEL	(240 Ω EMPTY/33 Ω FULL)	—	—	5916	WORKS WITH 240-33 OHM SENDERS INCLUDING AUTO METER 3062
FUEL PRESSURE	0-100 PSI	5963	—	—	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
NITROUS PRESSURE	0-1600 PSI	5974	—	—	
OIL PRESSURE	0-100 PSI	5953	5921	5927	DIGITAL STEPPER MOTOR OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 8' WIRING HARNESS. MECHANICAL OIL PRESSURE GAUGES INCLUDE 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS. SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTING.
OIL TEMPERATURE	140°-280° F	5956	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
OIL TEMPERATURE	140°-300° F	—	—	5948	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS
PYROMETER KIT	0°-1600° F	5944	—	—	INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS: 1/8" NPT, WELD-IN FITTING
PYROMETER KIT	0°-2000° F	5945	—	—	
TRANSMISSION TEMPERATURE	100°-250° F	—	—	5949	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
TRANSMISSION TEMPERATURE	100°-260° F	5957	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
VOLTMETER	8-18 VOLTS	5991	—	5992	5991 INCLUDES 8' WIRING HARNESS
WATER TEMPERATURE	100°-250° F	—	—	5937	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE	100°-260° F	5955	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
WATER TEMPERATURE	120°-240° F	—	5932	—	
WATER TEMPERATURE	140°-280° F	—	5931	—	INCLUDES 6' CAPILLARY TUBING & 1/2" NPT ADAPTER

### PEDESTAL MOUNT TACHOMETER

THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/4"	5"
10,000 RPM	SHIFT-LITE	INCLUDES EXTERNAL INCANDESCENT SHIFT LITE WAMBER LENS	—	5999
10,000 RPM	MINI MONSTER™	(1-12 CYL), AMBER LED SHIFT LIGHT	5990	—

### IN-DASH TACHOMETERS

OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/8"
10,000 RPM	IN-DASH	FOR IN-DASH MOUNTING. SEE MOUNTING SOLUTIONS FOR CUP/PEDESTAL OPTIONS.	5997

### IN-DASH SPEEDOMETERS

RANGE	DESCRIPTION	INFO	3 3/8"
160 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	5988




GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

HI-DEF™ LED LIGHTING

## Tachometers



## Speedometers & Tachometers

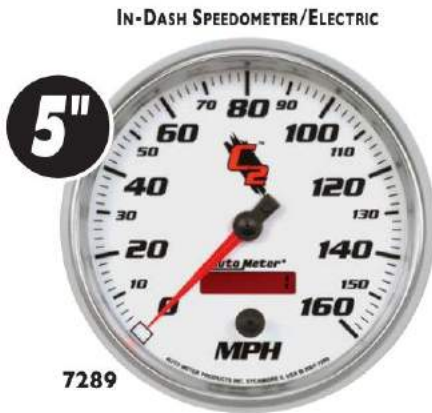

## Instruments





GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS



86 = DIGITAL GAUGE

GAUGES	RANGE	DIGITAL STEPPER MOTOR	FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	INFO
		2 1/16"	2 1/16"	2 1/16"	
AIR FUEL RATIO-NARROWBAND (LEAN-RICH)		7175	—	—	WORKS WITH MOST FACTORY NARROW BAND O2 SENSORS OR MODEL 2244. SEE W/DEBA AND AIR/FUEL PAGE FOR MORE INFO
AIR FUEL RATIO-WIDEBAND (AFR/LAMBDA)		7178	—	—	PRO INCLUDES BOSCH O2 SENSOR. SEE WIDEBAND AIR/FUEL PAGE FOR MORE INFO
AIR FUEL RATIO-WIDEBAND (8:1-18:1AFR)		7171	—	—	ANALOG INCLUDES BOSCH O2 SENSOR. SEE WIDEBAND AIR/FUEL PAGE FOR MORE INFO
BOOST	0-30 PSI	7160	—	—	INCLUDES MAP SENSOR, UNIVERSAL T, AND 8' HARNESS
BOOST	0-35 PSI	—	7104	—	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST	0-60 PSI	7170	7105	—	MECHANICAL INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS DIGITAL STEPPER MOTOR GAUGES INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
BOOST	0-100 PSI	—	7106	—	INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST/VACUUM	30 IN. HG/20 PSI	—	7107	—	DIGITAL STEPPER MOTOR GAUGES INCLUDE MAP SENSOR, T-FITTING, AND 8' HARNESS MECHANICAL GAUGES INCLUDE 10' NYLON TUBING AND UNIVERSAL T FITTING
BOOST/VACUUM	30 IN. HG/30 PSI	7159	7103	—	
BOOST/VACUUM	30 IN. HG/45 PSI	—	7108	—	
CLOCK-ANALOG		7185	—	—	
DIGITAL PRO-SHIFT SYSTEM-LEVEL 1		7187	—	—	SINGLE SHIFT POINT BLUE LED & INDICATORS
DIGITAL PRO-SHIFT SYSTEM-LEVEL 2		7188	—	—	4 STAGE SHIFT POINT, MULTI-COLOR LED, AND LAUNCH LITE FEATURE
FUEL LEVEL PROGRAMMABLE (0 Ω/280 Ω)		7114	—	—	FEATURES 2 PRE-SETS PLUS A UNIVERSAL, PROGRAMMABLE SETTING
FUEL LEVEL (0 Ω EMPTY/90 Ω FULL)		—	—	7113	WORKS WITH MOST 1985 TO 1997 CHEV/GM SENDERS
FUEL LEVEL (16 Ω EMPTY/158 Ω FULL)		—	—	7118	WORKS WITH MOST 1989 (F1) MUSTANG AND LATER FORD
FUEL LEVEL (73 Ω EMPTY/10 Ω FULL)		—	—	7115	WORKS WITH MOST PRE 1989 (PRE '87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER. SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS
FUEL LEVEL (240 Ω EMPTY/33 Ω FULL)		—	—	7116	WORKS WITH 240-30 OHM SENDERS, INCLUDING AUTO METER 3262
FUEL PRESSURE	0-15 PSI	7162	—	—	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
FUEL PRESSURE	0-100 PSI	7163	—	—	
NITROUS PRESSURE	0-1600 PSI	7174	—	—	
OIL PRESSURE	0-100 PSI	7153	7121	7127	DIGITAL STEPPER MOTOR OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 8' WIRING HARNESS. MECHANICAL OIL PRESSURE GAUGES INCLUDE 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS. SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTING
OIL TEMPERATURE	140°-280° F	7156	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
OIL TEMPERATURE	140°-300° F	—	—	7148	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS
PYROMETER KIT	0°-1600° F	7144	—	—	INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS: 1/8" NPT, WELD-IN FITTING & HOSE CLAMP METHODS.
PYROMETER KIT	0°-2000° F	7145	—	—	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
TRANSMISSION TEMPERATURE	100°-250° F	—	—	7149	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
TRANSMISSION TEMPERATURE	100°-260° F	7157	—	—	FULL SWEEP GAUGE 7191 INCLUDES 8' WIRING HARNESS
VOLTMETER	8-18 VOLTS	7191	—	7192	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE	100°-250° F	—	—	7137	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
WATER TEMPERATURE	100°-260° F	7155	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
WATER TEMPERATURE	120°-240° F	—	7132	—	INCLUDES 6' CAPILLARY TUBING & 1/2" NPT ADAPTER
WATER TEMPERATURE	140°-280° F	—	7131	—	

**PEDESTAL MOUNT TACHOMETER**

THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/4"	5"
10,000 RPM	SHIFT-LITE	INCLUDES EXTERNAL INCANDESCENT SHIFT LITE W/BLUE LENS	—	7299
10,000 RPM	MINI MONSTER™	(1-12 CYL), AMBER LED SHIFT LIGHT	7290	—

**IN-DASH TACHOMETERS**

OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/8"	5"
10,000 RPM	IN-DASH	FOR IN-DASH OR CUP MOUNTING. SEE MOUNTING SOLUTIONS FOR MORE DETAILS.	7297	7298*

\* 5" model cannot be cup mounted

**IN-DASH SPEEDOMETERS**

RANGE	DESCRIPTION	INFO	3 3/8"	5"
160 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETERS ARE COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5281 AND 5282 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5288.	7288	7289
160 MPH	IN-DASH/MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.	7293	—



GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

HI-DEF™ LED LIGHTING

## Tachometers

SHIFT-LITE TACHOMETER



IN-DASH TACHOMETER



IN-DASH TACHOMETER



## Speedometers & Tachometers

IN-DASH SPEEDOMETER/ELECTRIC



IN-DASH SPEEDOMETER/ELECTRIC



MINI MONSTER™ TACHOMETER



## Instruments

Wideband

PRO



Digital Stepper Motor

OIL PRESSURE



Short Sweep Electric

VOLTMETER



Full Sweep Mechanical

WATER TEMPERATURE





GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS



GAUGES	RANGE	DIGITAL STEPPER MOTOR	FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	INFO
		2 1/16"	2 1/16"	2 1/16"	
AIR FUEL RATIO-NARROWBAND (LEAN-RICH)		7375	—	—	WORKS WITH MOST FACTORY NARROW BAND O2 SENSORS OR MODEL 2244. SEE WIDEBAND AIR/FUEL PAGE FOR MORE INFO. <sup>98</sup>
AIR FUEL RATIO-WIDEBAND (AFR/LAMBDA)		7378	—	—	PRO INCLUDES BOSCH O2 SENSOR. SEE WIDEBAND AIR/FUEL PAGE FOR MORE INFO. <sup>98</sup>
BOOST	0-35 PSI	—	7304	—	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING (35 PSI ONLY)
BOOST	0-60 PSI	—	7305	—	
BOOST	0-100 PSI	—	7306	—	INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST/VACUUM	30 IN. HG/20 PSI	—	7307	—	DIGITAL STEPPER MOTOR GAUGES INCLUDE MAP SENSOR, T-FITTING, AND 8' HARNESS. MECHANICAL GAUGES INCLUDE 10' NYLON TUBING AND UNIVERSAL FITTING
BOOST/VACUUM	30 IN. HG/30 PSI	7359	7303	—	
BOOST/VACUUM	30 IN. HG/45 PSI	—	7308	—	
DIGITAL PRO-SHIFT SYSTEM-LEVEL 1		7387	—	—	GREEN LED & INDICATORS <sup>98</sup>
DIGITAL PRO-SHIFT SYSTEM-LEVEL 2		7388	—	—	5 STAGE SHIFT POINT, MULTI-COLOR LED, AND LAUNCH LIGHT FEATURE <sup>98</sup>
FUEL LEVEL PROGRAMMABLE (0 Ω EMPTY/280 Ω FULL)		7310	—	—	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL LEVEL (0 Ω EMPTY/90 Ω FULL)		—	—	7313	WORKS WITH MOST 1965 TO 1987 CHEV/GM SENDERS
FUEL LEVEL (16 Ω EMPTY/158 Ω FULL)		—	—	7318	WORKS WITH MOST 1989 (87 MUSTANG) AND LATER FORD
FUEL LEVEL (73 Ω EMPTY/10 Ω FULL)		—	—	7315	WORKS WITH MOST PRE-1989 (PRE-89 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER. SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
FUEL LEVEL (240 Ω EMPTY/33 Ω FULL)		—	—	7316	WORKS WITH 240-33 OHM SENDERS, INCLUDING AUTO METER 3282
FUEL PRESSURE	0-15 PSI	7362	—	—	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
FUEL PRESSURE	0-100 PSI	7363	—	—	
NITROUS PRESSURE	0-1600 PSI	7374	—	—	
OIL PRESSURE	0-100 PSI	7353	7321	7327	DIGITAL STEPPER MOTOR OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 8' WIRING HARNESS. MECHANICAL OIL PRESSURE GAUGES INCLUDE 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS. SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTING.
OIL TEMPERATURE	140°-280° F	7356	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
OIL TEMPERATURE	140°-300° F	—	—	7348	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS
PYROMETER KIT	0°-1600° F	7344	—	—	INCLUDES PROBE & 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS: 1/8" NPT.
PYROMETER KIT	0°-2000° F	7345	—	—	
TRANSMISSION TEMPERATURE	100°-250° F	—	—	7349	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
TRANSMISSION TEMPERATURE	100°-260° F	7357	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
VOLTMETER	8-18 VOLTS	—	—	7392	
WATER TEMPERATURE	100°-250° F	—	—	7337	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE	100°-260° F	7355	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
WATER TEMPERATURE	120°-240° F	—	7332	—	
WATER TEMPERATURE	140°-280° F	—	7331	—	INCLUDES 6' CAPILLARY TUBING & 1/2" NPT ADAPTER

### PEDESTAL MOUNT TACHOMETER

THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/4"	5"
10,000 RPM	SHIFT-LITE	INCLUDES EXTERNAL INCANDESCENT SHIFT LITE W/AMBER LENS	—	7499
10,000 RPM	MINI MONSTER™	(1-12 CYL), AMBER LED SHIFT LIGHT	7390	—

### IN-DASH TACHOMETERS

OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/8"	5"
10,000 RPM	IN-DASH	FOR IN-DASH OR CUP MOUNTING. SEE MOUNTING SOLUTIONS FOR MORE DETAILS.	7497	7498

### IN-DASH SPEEDOMETERS

RANGE	DESCRIPTION	INFO	3 3/8"	5"
160 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETERS ARE COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	7488	7489



Born on the high speed ovals of NASCAR and refined in motorsport competition throughout the world, it's no surprise the Pro-Comp Ultra-Lite gauges have become the most popular series in the Auto Meter line. Lightweight and engineered to near bulletproof standards, the matte brushed aluminum dial and bezel look clean, polished and right at home in anything from the most hardcore track car to high tech street machines. The Ultra-Lite series also offers the most comprehensive selection of different gauge types, assuring a perfect fit in virtually any build. These instruments define what it means to be professional grade; more professional racers trust Ultra-Lites than any other gauge.

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

ULTRA-LITE®

**Tachometers**

SHIFT-LITE TACHOMETER



3911

IN-DASH TACHOMETER



4498

IN-DASH TACHOMETER



4497

**Speedometers**

IN-DASH SPEEDOMETER/ELECTRIC



4489

IN-DASH GPS SPEEDOMETER/ELECTRIC



4480

IN-DASH SPEEDOMETER/MECHANICAL



4492

**Instruments**

**Digital Stepper Motor**

OIL PRESS. w/ PEAK MEMORY & WARNING



4352

**Short Sweep Electric**

TRANSMISSION TEMPERATURE



4357

**Full Sweep Mechanical**

WATER TEMPERATURE



4332

BOOST/VAC



4403

= DIGITAL GAUGE

GAUGES	RANGE	DIGITAL STEPPER MOTOR		FULL SWEEP MECH.		SHORT SWEEP ELEC.		INFO
		2 1/16"	2 5/16"	2 1/16"	2 5/16"	2 1/16"	2 5/16"	
AIR FUEL RATIO-NARROWBAND	(LEAN-RICH)	4375	---	---	---	---	---	WORKS WITH MOST FACTORY NARROW-BAND SENSORS OF MODEL 2244 NO BACK LIGHTING
AIR FUEL RATIO-WIDEBAND PRO	(AFR/LAMBDA)	4378	---	---	---	---	---	PRO INCLUDES BOSCH 42 O2 SENSOR. SEE WEBSITE FOR MORE INFORMATION
AIR FUEL RATIO-WIDEBAND PRO PLUS	(AFR/LAMBDA)	4397	---	---	---	---	---	PRO PLUS INCLUDES BOSCH 49 O2 SENSOR. SEE WEBSITE FOR MORE INFORMATION
AIR FUEL RATIO-WIDEBAND ANALOG	(8:1-18:1 AFR)	4370	4479	---	---	---	---	ANALOG INCLUDES BOSCH 42 O2 SENSOR. SEE WEBSITE FOR MORE INFORMATION
AIR FUEL RATIO-WIDEBAND STREET	(10:1-17:1 AFR)	4379	---	---	---	---	---	STREET INCLUDES BOSCH 42 O2 SENSOR. SEE WEBSITE FOR MORE INFORMATION
AIR PRESSURE	0-150 PSI	---	---	4320	---	---	---	INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
DUAL AIR TEMPERATURE	0°-300° F	4358	---	---	---	---	---	INCLUDES TWO 5/8" NPT SENDER & 8' WIRE HARNESS
BLOWER PRESSURE	0-60 PSI	---	---	4402	---	---	---	INCLUDES 10' NYLON TUBING & 1/8" & 1/4" NPT FITTINGS
BOOST	0-15 PSI	4350	---	4302	---	---	---	INCLUDES 10' NYLON TUBING, COMPRESSION FITTINGS & 1/8" TO 1/4" NPT ADAPTER FITTING.
BOOST	0-35 PSI	---	---	4304	4404	---	---	---
BOOST	0-60 PSI	---	---	4305	---	---	---	---
BOOST	0-100 PSI	---	---	4306	---	---	---	---
BOOST CONTROLLER	30 IN. HG/30 PSI	4381	---	---	---	---	---	INCLUDES 10' NYLON TUBING & 1/8" & 1/4" NPT FITTINGS
BOOST/VACUUM	30 IN. HG/20 PSI	---	---	4301	4401	---	---	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRE HARNESS, BOOST CONTROL, SOLENOID
BOOST/VACUUM	30 IN. HG/30 PSI	---	---	4303	4403	---	---	---
BOOST/VACUUM	30 IN. HG/30 PSI	---	---	4308	---	---	---	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST/VACUUM	30 IN. HG/45 PSI	---	---	4308	---	---	---	---
BOOST/VACUUM	60 CM/HG-2.0 BAR	---	---	4303-M	---	---	---	---
BOOST/VACUUM W/PEAK & WARNING	30 IN HG./15 PSI	4376	---	---	---	---	---	INCLUDES MAP SENSOR, UNIVERSAL T-FITTING, 8' WIRE HARNESS, & 10 1/2" NYLON TUBING
BOOST/VACUUM W/PEAK & WARNING	30 IN HG./30 PSI	4377	4477	---	---	---	---	---
BRAKE PRESSURE	0-1600 PSI	---	4487	---	---	---	---	INCLUDES 1/8" NPT SENDER AND 8' WIRE HARNESS
BRAKE PRESSURE	0-2000 PSI	---	---	4426	---	---	---	INCL. T-FITTING, 3/8" OD X 1/8"-27 NPT FITTING, USE ONLY APPROVED BRAKE LINES
CLOCK-ANALOG	---	---	---	---	4385	4485	---	12 HOUR QUARTZ MOVEMENT WITH SECOND HAND
CYLINDER HEAD TEMP.	140°-340° F	---	---	---	---	---	---	INCLUDES 1/8" NPT SENDER
DIESEL FUEL RAIL PRESSURE	0-30,000 PSI	4386*	---	---	---	---	---	2002-2007 DODGE CUMMINS 3.9L & LBZ & 4.5L GM DURAMAX ENGINES ONLY*
DIESEL FUEL RAIL PRESSURE	0-30,000 PSI	4393*	---	---	---	---	---	2007.5 & NEWER DODGE CUMMINS 3.9L & LBZ & 4.5L GM DURAMAX ENGINES ONLY*
DIESEL HPOP PRESSURE	0-4,000 PSI	4396*	---	---	---	---	---	1994-2007 FORD POWERSTROKE 7.3L & 6.0L ENGINES ONLY*
DIFFERENTIAL TEMPERATURE	100°-250° F	---	---	---	4349	---	---	INCLUDES 1/8" NPT SENDER AND 3/8" AND 1/2" NPT ADAPTERS
DIGITAL PRO-SHIFT SYSTEM-LEVEL 1	---	4387	---	---	---	---	---	AMBER LED INDICATORS
DIGITAL PRO-SHIFT SYSTEM-LEVEL 2	---	4388	---	---	---	---	---	5 STAGE SHIFT POINT & MULTI COLOR LED
DIGITAL PRO-SHIFT SYSTEM-LEVEL 3	---	4389	---	---	---	---	---	RPM FLARE, 3 STAGE SHIFT POINT & MULTI COLOR LED
D-PIC ACCELEROMETER	-2G +2G	4380	---	---	---	---	---	MEASURES G-FORCE, 1/4 MILE TIME, 0-60 TIME & HORSEPOWER
EXHAUST PRESSURE	0-60 PSI	4392	---	4325	---	---	---	DIGITAL STEPPER MOTOR GAUGES INCLUDE 1/8" NPT SENDER AND 8' WIRE HARNESS, AND 6' COPPER LINE
EXHAUST PRESSURE	0-100 PSI	4394	---	4326	---	---	---	MECHANICAL GAUGES INCLUDES 10' NYLON TUBING, 6' COPPER TUBING AND COMPRESSION FITTINGS. MUST BE MOUNTED OUTSIDE THE VEHICLE.
FUEL LEVEL	(9 Q EMPTY/30 Q FULL)	---	---	---	4317	4417	---	WORKS WITH MOST PRE-1985 CHEVY/GM SENDERS
FUEL LEVEL	(9 Q EMPTY/90 Q FULL)	---	---	---	4314	4414	---	WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS
FUEL LEVEL	(16 Q EMPTY/150 Q FULL)	---	---	---	4318	4418	---	WORKS WITH MOST 1989 FORD MUSTANGS AND LATER FORD
FUEL LEVEL	(73 Q EMPTY/110 Q FULL)	---	---	---	4315	4415	---	WORKS WITH MOST PRE-1989 (PRE 93 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER. SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
FUEL LEVEL	(73 Q EMPTY/10 Q FULL) LINEAR	---	---	---	4319	---	---	WORKS WITH LINEAR 73-10 OHM AFTERMARKET SENDERS.
FUEL LEVEL	(240 Q EMPTY/33 Q FULL)	---	---	---	4316	4416	---	WORKS WITH 240-33 OHM SENDERS, INCLUDING AUTO METER 3262
FUEL LEVEL PROGRAMMABLE	(0 Q, 280 Q)	4310	---	---	---	---	---	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL PRESSURE	0-15 PSI	---	---	4311	4411	---	---	DIGITAL STEPPER MOTOR FUEL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 8' WIRE HARNESS
FUEL PRESSURE W/PEAK & WARNING	0-15 PSI	4367	4470	---	---	---	---	---
FUEL PRESSURE	0-30 PSI	4360	---	---	---	---	---	---
FUEL PRESSURE	0-100 PSI	---	---	4312	4412	---	---	---
FUEL PRESSURE W/PEAK & WARNING	0-100 PSI	4371	4472	---	---	---	---	MECHANICAL FUEL PRESSURE GAUGES REQUIRE #4 BRAIDED LINE AND MOUNTING CUP AND MUST BE MOUNTED OUTSIDE THE VEHICLE.
FUEL PRESSURE	0-7 BAR	4363-M	---	---	---	---	---	---
FUEL PRESSURE	0-1.0 BAR	---	---	4311-M	---	---	---	---
FUEL PRESSURE WITH ISOLATOR	0-15 PSI	---	---	4313	4413	---	---	INCLUDES ISOLATOR AND 4' LINE. REQUIRES BRAIDED LINE TO FUEL SOURCE
NITROUS PRESSURE	0-1600 PSI	4374	4474	---	---	---	---	INCLUDES 1/8" NPT SENDER AND 8' WIRE HARNESS
NITROUS PRESSURE	0-2000 PSI	---	---	4328	4428	---	---	REQUIRES #4 BRAIDED LINE
OIL PRESSURE	0-100 PSI	---	---	4321	4421	4327	4427	DIGITAL STEPPER MOTOR ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 8' WIRE HARNESS
OIL PRESSURE W/PEAK & WARNING	0-100 PSI	4352	4452	---	---	---	---	---
OIL PRESSURE	0-150 PSI	---	---	4323	4423	---	---	---
OIL PRESSURE	0-200 PSI	---	---	4322	4422	---	---	MECHANICAL OIL PRESSURE GAUGES INCLUDE 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
OIL PRESSURE	0-7 KG/CM2	---	---	---	4421-J	---	---	SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTING.
OIL PRESSURE	0-7 BAR	---	---	---	---	4327-M	---	---
OIL TANK TEMPERATURE	140°-340° F	---	---	4346	---	---	---	INCLUDES 4' CAPILLARY TUBING AND 1/2" NPT FITTING
OIL TEMPERATURE W/PEAK & WARNING	100°-340° F	4340	4440	---	---	---	---	INC. 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS AND 8' WIRE HARNESS
OIL TEMPERATURE	140°-280° F	---	---	4341	4441	---	---	INCLUDES 8' CAPILLARY TUBING AND 1/2" NPT FITTING
OIL TEMPERATURE	100°-250° F	---	---	---	---	4347	---	---
OIL TEMPERATURE	140°-300° F	---	---	---	---	4348	4447	---
OIL TEMPERATURE	60°-170° C	---	---	---	---	4348-M	---	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
PRESSURE	0-400 PSI	---	---	4424	---	---	---	REQUIRES #4 BRAIDED LINE
PRNDL+	GEAR SHIFT INDICATOR GAUGE	4359	---	---	---	---	---	INCLUDES UNIVERSAL SENDER - FOR AUTOMATIC TRANSMISSION ONLY
PYROMETER KIT	0°-1600° F	4344	4444	---	---	---	---	INCLUDES PROBE AND 17' OF THERMO-COUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS, INCLUDING 1/8" NPT AND WELD-IN FITTING AND HOSE CLAMP METHOD.
PYROMETER	0°-2000° F	4345	---	---	---	---	---	---
PYROMETER	0°-900° C	4344-M	---	---	---	---	---	---
TEMPERATURE	140°-340° F	---	---	---	4435	---	---	---
TRANSMISSION TEMPERATURE	140°-280° F	---	---	4351	4451	---	---	INCLUDES 8' CAPILLARY TUBING AND 1/2" NPT FITTING
TRANSMISSION TEMPERATURE	100°-250° F	---	---	---	---	4357	4457	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
VACUUM	30 IN. HG	---	---	4384	4484	---	---	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
VOLTMETER	8-18 VOLTS	---	---	---	---	4391	4491	---
VOLTMETER W/PEAK & WARNING	8-18 VOLTS	4383	4483	---	---	---	---	INCLUDES 8' WIRE HARNESS

\* Works with factory sensors/parameters





ULTRA-LITE®

GAUGES	RANGE	DIGITAL STEPPER MOTOR		FULL SWEEP MECH.		SHORT SWEEP ELEC.		INFO
		2 1/8"	2 5/8"	2 1/8"	2 5/8"	2 1/8"	2 5/8"	
WATER PRESSURE	0-35 PSI	—	—	4307	4407	—	—	INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
WATER PRESSURE	0-60 PSI	—	—	4324	—	—	—	INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
WATER PRESSURE W/PEAK & WARNING	0-100 PSI	4368	—	—	—	—	—	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
WATER TEMPERATURE	60°-210° F	4369	4469	—	—	—	—	INC. 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS AND 8' WIRING HARNESS
WATER TEMPERATURE	100°-250° F	—	—	—	—	4337	4437	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
WATER TEMPERATURE W/PEAK & WARNING	100°-260° F	4354	4454	—	—	—	—	INC. 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS AND 8' WIRING HARNESS
WATER TEMPERATURE	140°-280° F	—	—	4331	4431	—	—	INCLUDES 8' CAPILLARY TUBING AND 1/2" NPT FITTING
WATER TEMPERATURE	120°-240° F	—	—	4332	4432	—	—	INCLUDES 12' CAPILLARY TUBING AND 1/2" NPT FITTING
WATER TEMPERATURE	120°-240° F	—	—	4333	4433	—	—	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
WATER TEMPERATURE	40°-120° C	—	—	—	—	4337-M	—	INCLUDES 8' CAPILLARY TUBING AND 1/2" NPT FITTING
WATER TEMPERATURE	60°-140° C	—	—	—	4431-M	—	—	INCLUDES 8' CAPILLARY TUBING AND 1/2" NPT FITTING

**PEDESTAL MOUNT TACHOMETER** OPERATES ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	2 5/8"	3 3/4"	5"
9,000 RPM	DUAL RANGE DIAL	FEATURES 2 STAGE SHIFT LIGHT AND MEMORY. INCLUDES LED AMBER QUICK-LITE	—	—	6854
11,000 RPM	DUAL RANGE DIAL	FEATURES 2 STAGE SHIFT LIGHT AND MEMORY. INCLUDES LED AMBER QUICK-LITE	—	—	6855
9,000 RPM		FEATURES 2 STAGE SHIFT LIGHT AND MEMORY. INCLUDES LED AMBER QUICK-LITE	—	—	6856
8,000 RPM		FEATURES ADJUSTABLE REDLINE POINTER	—	3781	—
10,000 RPM	MONSTER™		—	—	3910
10,000 RPM	SHIFT-LITE	SHIFT LIGHT TACHOMETER WITH EXTERNAL INCANDESCENT AMBER SHIFT LIGHT	—	—	3911
11,000 RPM		FEATURES 2 STAGE SHIFT LIGHT AND MEMORY. INCLUDES LED AMBER QUICK-LITE	—	—	6858
5,000 RPM	DIESEL	DIESEL TACH INCLUDES INDUCTIVE PICKUP THAT STRAPS TO ALTERNATOR.	3788	—	—
8,000 RPM		OPERATES ON 4, 6, OR 8 CYLINDER ENGINES WITH POINTS, ELECTRONIC, AND MOST 12 VOLT HIGH PERFORMANCE RACING IGNITIONS.	3707	—	—
9,000 RPM	PLAYBACK	SPORT COMP W/ 30 SEC. RECORD TIME AND LAUNCH LIGHT. (1-12 CYL)	—	—	3964
11,000 RPM	PLAYBACK	SPORT COMP W/ 30 SEC. RECORD TIME AND LAUNCH LIGHT. (1-12 CYL)	—	—	3965

**IN-DASH TACHOMETER** OPERATES ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/8"	5"
10,000 RPM	DUAL RANGE DIAL	FEATURES MEMORY TO RECALL THE HIGHEST RPM ACHIEVED DURING A RACE	—	4499
10,000 RPM	MEMORY	FEATURES MEMORY TO RECALL THE HIGHEST RPM ACHIEVED DURING A RACE	—	4494
10,000 RPM		FOR IN-DASH MOUNTING	4497	4498

**5" PRO-STOCK TACHOMETER** OPERATES ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	5"
9,000 RPM	PEDESTAL	FEATURES LAUNCH LIGHT, 4 STAGE SHIFT LIGHT, AND MEMORY. INCLUDES 12 LED SUPER LITE	6832
11,000 RPM	PEDESTAL		6834

**3 3/4" MEMORY TACHOMETER** OPERATES ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/4"
10,000 RPM	PEDESTAL	FEATURES PEAK RPM MEMORY W/ REMOTE MOUNTED MEMORY SWITCH	6604

**3 3/8" & 5" IN-DASH SPEEDOMETER**

RANGE	DESCRIPTION	INFO	3 3/8"	5"
120 MPH	MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.	4492	—
160 MPH	MECHANICAL		4493	4495
200 MPH	MECHANICAL	5" MOUNTS INTO A 4 5/8" DIAMETER HOLE, 3 3/8" MOUNTS INTO A 3 3/8" DIAMETER HOLE.	—	4496
120 MPH	ELECTRICAL	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	4487	—
160 MPH	ELECTRICAL		4488	4489
190 km/h	ELECTRICAL		4487-M	—
200 MPH	ELECTRICAL		4486	4490
260 km/h	ELECTRICAL	5" MOUNTS INTO A 4 5/8" DIAMETER HOLE, 3 3/8" MOUNTS INTO A 3 3/8" DIAMETER HOLE.	—	4489-M
140 MPH	GPS	GPS SPEEDOMETER INCLUDES ANTENNA. RALLY NAV DISPLAY SHOWS COMPASS/ HEADING, GPS COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME.	4480	4481



An industry icon since the 1970's, Auto Meter's Sport-Comp gauges reinvented performance instrumentation as we know it. A clean, easy to read design, highly ruggedized movements built to withstand the rigors of competition and the legendary look that set the standard in racing. Form follows function in a purpose built line of gauges designed and built to accomplish the singular mission of providing the most accurate information possible to the driver. Just as at home on the street as they are on the racetrack, this timeless design is the finishing touch to set off any serious build. Sport-Comp gauges are a huge part of the reason why Auto Meter holds more motorsport victories than every other gauge company combined.

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

**SPORT-COMP®**

**Tachometers**

SHIFT-LITE TACHOMETER



3904

IN-DASH TACHOMETER



3990

IN-DASH TACHOMETER



3991

**Speedometers**

IN-DASH SPEEDOMETER/ELECTRIC



3989

IN-DASH GPS SPEEDOMETER/ELECTRIC



3982

IN-DASH SPEEDOMETER/MECHANICAL



3992

**Instruments**

*Digital Stepper Motor*

FUEL PRESSURE



3363

*Short Sweep Electric*

VOLTMETER



3391

*Full Sweep Mechanical*

WATER TEMPERATURE



3332

WATER TEMPERATURE



3431

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

Ⓢ = DIGITAL GAUGE

GAUGES	RANGE	DIGITAL STEPPER MOTOR		FULL SWEEP MECH.		SHORT SWEEP ELEC.		INFO
		2 1/16"	2 5/8"	2 1/16"	2 5/8"	2 1/16"	2 5/8"	
AIR FUEL RATIO-NARROWBAND	(LEAN-RICH)	3375	—	—	—	—	—	WORKS WITH MOST FACTORY NARROW BAND SENSORS OR MODEL 244
AIR FUEL RATIO-WIDEBAND PRO	(AFR/LAMBDA)	3378	—	—	—	—	—	PRO INCLUDES BOSCH 4.2 O2 SENSOR. SEE WEBSITE FOR MORE INFORMATION
AIR FUEL RATIO-WIDEBAND PRO PLUS	(AFR/LAMBDA)	3397	—	—	—	—	—	PRO PLUS INCLUDES BOSCH 4.9 O2 SENSOR. SEE WEBSITE FOR MORE INFORMATION
AIR FUEL RATIO-WIDEBAND ANALOG	(8:1-18:1AFR)	3370	3579	—	—	—	—	ANALOG INCLUDES BOSCH 4.2 O2 SENSOR. SEE WEBSITE FOR MORE INFORMATION
AIR FUEL RATIO-WIDEBAND STREET	(10:1-17:1AFR)	3379	—	—	—	—	—	STREET INCLUDES BOSCH 4.2 O2 SENSOR. SEE WEBSITE FOR MORE INFORMATION
AIR PRESSURE	0-150 PSI	—	—	3320	—	—	—	INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
DUAL AIR TEMPERATURE	0°-300° F	3358	—	—	—	—	—	INCLUDES TWO 3/8" NPT SENDER & 8' WIRE HARNESS
AMMETER	60-0-60 AMPS	—	—	—	—	—	3586	REQUIRES 18 GAUGE WIRE
BLOWER PRESSURE	0-60 PSI	—	—	—	3402	—	—	INCLUDES 10' NYLON TUBING & 1/8" & 1/4" NPT FITTINGS
BOOST	0-15 PSI	3350	—	3302	—	—	—	INCLUDES 10' NYLON TUBING, COMPRESSION FITTINGS & 1/8" TO 1/4" NPT ADAPTER FITTING.
BOOST	0-35 PSI	—	—	3304	3404	—	—	
BOOST	0-2.5 KG/CM2	—	—	3304-J	3404-J	—	—	
BOOST CONTROLLER	30 IN. HG/30 PSI	3381	—	—	—	—	—	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS. BOOST CONTROL SCHEMID
BOOST/VACUUM	30 IN. HG/20 PSI	—	—	3301	3401	—	—	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST/VACUUM	30 IN. HG/30 PSI	—	—	3303	3403	—	—	
BOOST/VACUUM	30 IN. HG/45 PSI	—	—	3308	—	—	—	
BOOST/VACUUM	60 CM./HG-2.0 BAR	—	—	3303-M	—	—	—	
BOOST/VACUUM	60 CM./HG-2.0 KG/CM2	—	—	3303-J	3401-J	—	—	
BOOST/VACUUM W/PEAK & WARNING	30 IN HG./15 PSI	3376	—	—	—	—	—	INCLUDES MAP SENSOR, UNIVERSAL T-FITTING AND 8' WIRING HARNESS
BOOST/VACUUM W/PEAK & WARNING	30 IN HG./30 PSI	3377	—	—	—	—	—	12 HOUR QUARTZ MOVEMENT WITH SECOND HAND
CLOCK-ANALOG	—	—	—	—	—	—	3585	
CYLINDER HEAD TEMP.	140°-340° F	—	—	—	3336	3536	—	INCLUDES 1/8" NPT SENDER
DIFFERENTIAL TEMPERATURE	100°-250° F	—	—	—	3349	—	—	INCLUDES 1/8" NPT SENDER AND 3/8" AND 1/2" NPT ADAPTERS
DIGITAL PRO-SHIFT SYSTEM-LEVEL 1	—	3387	—	—	—	—	—	AMBER LED INDICATORS
DIGITAL PRO-SHIFT SYSTEM-LEVEL 2	—	3388	—	—	—	—	—	5 STAGE SHIFT POINT & MULTI COLORED.
DIGITAL PRO-SHIFT SYSTEM-LEVEL 3	—	3389	—	—	—	—	—	RPM PLAYBACK, 5 STAGE SHIFT POINT & MULTI COLOR LED.
FUEL LEVEL	(0 Q EMPTY/30 Q FULL)	—	—	—	3317	3517	—	WORKS WITH MOST PRE-1985 CHEVY/GM SENDERS
FUEL LEVEL	(0 Q EMPTY/30 Q FULL)	—	—	—	3314	3514	—	WORKS WITH MOST 1985 TO 1997 CHEVY/GM SENDERS
FUEL LEVEL	(16 Q EMPTY/168 Q FULL)	—	—	—	3318	3518	—	WORKS WITH MOST 1989 (87 MUSTANG) AND LATER FORD
FUEL LEVEL	(73 Q EMPTY/10 Q FULL)	—	—	—	3315	3515	—	WORKS WITH MOST PRE-1986 (PRE-87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR RE-PRODUCTION SENDERS.
FUEL LEVEL	(73 Q EMPTY/10 Q FULL) LINEAR	—	—	—	3319	—	—	WORKS WITH LINEAR 73-10 OHM AFTER MARKET SENDERS.
FUEL LEVEL	(240 Q EMPTY/33 Q FULL)	—	—	—	3316	3516	—	WORKS WITH 240-33 OHM SENDERS, INCLUDING AUTO METER 3282
FUEL LEVEL PROGRAMMABLE	(0 Q/280 Q)	3310	—	—	—	—	—	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL PRESSURE	0-15 PSI	3361	3561	3311	3411	—	—	DIGITAL STEPPER MOTOR FUEL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 8' WIRING HARNESS.
FUEL PRESSURE	0-100 PSI	3363	3563	3312	3412	—	—	
FUEL PRESSURE	0-7 BAR	3363-M	—	—	—	—	—	
FUEL PRESSURE	0-7 KG/CM2	—	—	3312-J	3412-J	—	—	
FUEL PRESSURE	0-1.0 BAR	—	—	3311-M	—	—	—	
FUEL PRESSURE	0-1.0 KG/CM2	—	—	3311-J	—	—	—	MECHANICAL FUEL PRESSURE GAUGES REQUIRE #4 BRAIDED LINE AND MOUNTING CUP AND MUST BE MOUNTED OUTSIDE THE VEHICLE.
FUEL PRESSURE WITH ISOLATOR	0-15 PSI	—	—	3313	3413	—	—	INCLUDES ISOLATOR AND 4' LINE. REQUIRES BRAIDED LINE TO FUEL SOURCE
NITROUS PRESSURE	0-1600 PSI	3374	3574	—	—	—	—	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
NITROUS PRESSURE	0-2000 PSI	—	—	3328	3428	—	—	REQUIRES #4 BRAIDED LINE
OIL PRESSURE	0-100 PSI	—	—	3321	3421	3327	3527	MECHANICAL OIL PRESSURE GAUGES INCLUDE 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS.
OIL PRESSURE	0-150 PSI	—	—	3323	3423	—	—	
OIL PRESSURE	0-200 PSI	—	—	3322	3422	—	—	
OIL PRESSURE	0-7 KG/CM2	—	—	—	3421-J	—	—	SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTING.
OIL PRESSURE	0-14 KG/CM2	—	—	3322-J	—	—	—	
OIL PRESSURE	0-7 BAR	—	—	—	3327-M	3527-M	—	—
OIL TEMPERATURE	140°-280° F	—	—	3341	3441	—	—	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.
OIL TEMPERATURE	140°-280° F	—	—	—	3443	—	—	
OIL TEMPERATURE	60-140° C	—	—	3341-M	—	—	—	
OIL TEMPERATURE	140°-300° F	—	—	—	3348	3543	—	
OIL TEMPERATURE	100°-250° F	—	—	—	3347	3542	—	
OIL TEMPERATURE	60-150° C	—	—	—	—	3348-M	—	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
OIL TEMPERATURE	40-120° C	—	—	—	—	3542-M	—	—
OIL TEMPERATURE	60°-170° C	—	—	—	—	3543-M	—	—
PRNDL + GEAR SHIFT INDICATOR GAUGE	—	3359	—	—	—	—	—	INCLUDES UNIVERSAL SENDER - FOR AUTOMATIC TRANSMISSION ONLY
PYROMETER KIT	0°-1600° F	3344	3544	—	—	—	—	INCLUDES PROBE AND 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS, INCLUDING 1/8" NPT AND WELD-IN FITTING AND HOSE CLAMP METHOD.
PYROMETER KIT	0°-900° C	3344-M	—	—	—	—	—	—
TRANSMISSION TEMPERATURE	140°-280° F	—	—	3351	3451	—	—	INCLUDES 8' CAPILLARY TUBING AND 1/2" NPT FITTING
TRANSMISSION TEMPERATURE	100°-250° F	—	—	—	—	3357	3552	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
VACUUM	30 IN. HG	—	—	3384	3484	—	—	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
VOLTMETER	8-18 VOLTS	—	—	—	3391	3592	—	—



**GAUGE CHART CONTINUED**

GAUGES	RANGE	DIGITAL STEPPER MOTOR		FULL SWEEP MECH.		SHORT SWEEP ELEC.		INFO
		2 1/8"	2 5/8"	2 1/8"	2 5/8"	2 1/8"	2 5/8"	
WATER TEMPERATURE	60°-210° F	—	3569	—	—	—	—	INC. 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS AND 8' WIRING HARNESS.
WATER TEMPERATURE	100°-250° F	—	—	—	—	3337	3531	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE	140°-280° F	—	—	3331	3431	—	—	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.
WATER TEMPERATURE	120°-240° F	—	—	3332	3432	—	—	INCLUDES 12' CAPILLARY TUBING AND 1/2" NPT FITTING.
WATER TEMPERATURE	120°-240° F	—	—	3333	3433	—	—	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE	40°-120° C	—	—	—	—	3337-M	—	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.
WATER TEMPERATURE	60°-140° C	—	—	—	3431-M	—	—	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.
WATER TEMPERATURE	50°-115° C	—	—	3332-M	—	—	—	

**PEDESTAL MOUNT TACHOMETER** OPERATES ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	2 5/8"	3 3/4"	5"
8,000 RPM	MINI COMPETITION	OPERATES ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS	3708	—	—
8,000 RPM		MONSTER™ TACHOMETER WITH ADJUSTABLE REDLINE POINTER	—	3780	3980
8,000 RPM	SHIFT-LITE	SHIFT LIGHT TACHOMETER WITH EXTERNAL INCANDESCENT AMBER SHIFT LIGHT	—	—	3905
9,000 RPM	PLAYBACK	PLAYBACK TACH W/ 80 SEC. RPM RECORD TIME.	—	—	3966*
10,000 RPM		MONSTER™ TACHOMETER WITH ADJUSTABLE REDLINE POINTER	—	3700	3900
10,000 RPM	SHIFT-LITE	SHIFT LIGHT TACHOMETER WITH EXTERNAL INCANDESCENT AMBER SHIFT LIGHT	—	—	3904
10,000 RPM	SHIFT-LITE	SHIFT LITE TACHOMETER W/ AMBER LIGHT ON SHIELD	—	—	3903
10,000 RPM	SHIFT-LITE W/ MEMORY	2 STAGE SHIFT LITE TACH W/ EXT. AMBER LIGHT AND PEAK RPM MEMORY RECALL	—	—	3906*
11,000 RPM	PLAYBACK	PLAYBACK TACH W/ 80 SEC. RPM RECORD TIME.	—	—	3967*

\* OPERATES ON MOST 2, 3, 4, 5, 6, 8, 10, & 12 CYLINDER ENGINES.

**IN-DASH TACHOMETER** OPERATES ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/8"	5"
10,000 RPM	IN-DASH	FITS IN A 5/8" HOLE	—	3990
8,000 RPM	IN-DASH	SEE MOUNTING SOLUTIONS FOR CUP/PEDESTAL MOUNTING	3991	—

**IN-DASH SPEEDOMETER** 5" MOUNTS INTO A 4 5/8" DIAMETER HOLE, 3 3/8" MOUNTS INTO A 3 3/8" DIAMETER HOLE.

RANGE	DESCRIPTION	INFO	3 3/8"	5"
120 MPH	MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.	—	3994
160 MPH	MECHANICAL		—	3995
160 MPH	ELECTRIC	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	—	3989
120 MPH	MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.	3992	—
120 MPH	ELECTRIC	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	3987	—
160 MPH	ELECTRIC		3988	—
190 KPH	ELECTRIC		3987-M	—
140 MPH	GPS	GPS SPEEDOMETER INCLUDES COMPASS, HEADING, GPS COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME.	3982	3983

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS



Taking the winning formula behind Auto Meter's Sport-Comp gauges and injecting the clean style of a white dial and a black powder coated bezel, these competition proven instruments remain one of the best selling lines in our history. The high contrast design and florescent orange pointer makes them incredibly easy to read at a glance in any conditions. Over engineered internals mean these gauges will stand up to whatever you can throw at them, on or off the track. With their unique look and legendary durability, the Phantom series has become an icon, setting the standard for quality and dependability in white dialed instruments.

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

Phantom®

**Tachometers**

SHIFT-LITE TACHOMETER



5899

IN-DASH TACHOMETER



5898

IN-DASH TACHOMETER



5897

IN-DASH SPEEDOMETER/ELECTRIC



5889

**Speedometers**

IN-DASH SPEEDOMETER/ELECTRIC



5880

IN-DASH SPEEDOMETER/MECHANICAL



5892

**Instruments**

**Digital Stepper Motor**  
FUEL LEVEL/  
PROGRAMMABLE



5710

**Short Sweep Electric**  
VOLTMETER



5791

**Full Sweep Mechanical**  
WATER TEMPERATURE



5731

WATER TEMPERATURE



5831



Ⓢ = DIGITAL GAUGE

GAUGES	RANGE	DIGITAL STEPPER MOTOR		FULL SWEEP MECHANICAL		SHORT SWEEP ELECTRIC		INFO
		2 1/16"	2 5/8"	2 1/16"	2 5/8"	2 1/16"	2 5/8"	
AIR FUEL RATIO-NARROWBAND	(LEAN-RICH)	5775	—	—	—	—	—	WORKS WITH MOST FACTORY NARROW BAND SENSORS OR MODEL 2944
AIR FUEL RATIO-WIDEBAND PRO	(AFR/LAMBDA)	5778	—	—	—	—	—	PRO INCLUDES BOSCH 42 O2 SENSOR. SEE WEBSITE FOR MORE INFORMATION. Ⓢ
AIR FUEL RATIO-WIDEBAND ANALOG	(8.1-18.1 AFR)	5770	5879	—	—	—	—	ANALOG INCLUDES BOSCH 42 O2 SENSOR. SEE WEBSITE FOR MORE INFORMATION.
AIR FUEL RATIO-WIDEBAND STREET	(10.1-17.1 AFR)	5779	—	—	—	—	—	STREET INCLUDES BOSCH 42 O2 SENSOR. SEE WEBSITE FOR MORE INFORMATION. Ⓢ
AIR PRESSURE	0-150 PSI	—	—	5720	—	—	—	INCLUDES 10' NYLON TUBING, COMPRESSION FITTINGS & 1/8" TO 1/4" NPT ADAPTER FITTING.
DUAL AIR TEMPERATURE	0°-300° F	5758	—	—	—	—	—	INCLUDES TWO 3/8" NPT SENDER, & 8' WIRE HARNESS. Ⓢ
BLOWER PRESSURE	0-60 PSI	—	—	—	5802	—	—	
BOOST	0-15 PSI	5750	—	5702	—	—	—	DIGITAL STEPPER MOTOR GAUGES INCLUDE 1/8" NPT SENDER AND 8' WIRING HARNESS, AND 1/8" TO 1/4" NPT ADAPTER FITTING.
BOOST	0-35 PSI	—	—	5704	—	—	—	MECHANICAL GAUGES INCLUDES 10' NYLON TUBING, COMPRESSION FITTINGS & 1/8" TO 1/4" NPT ADAPTER FITTING.
BOOST	0-60 PSI	—	—	5705	—	—	—	INCLUDES 10' NYLON TUBING, COMPRESSION FITTINGS & 1/8" TO 1/4" NPT ADAPTER FITTING.
BOOST	0-100 PSI	—	—	5706	—	—	—	INCLUDES 10' NYLON TUBING & 1/8" & 1/4" NPT FITTINGS.
BOOST CONTROLLER	30 IN. HG/30 PSI	5782	—	—	—	—	—	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS. BOOST CONTROL SOLENOID. Ⓢ
BOOST/VACUUM	30 IN. HG/20 PSI	—	—	5701	5801	—	—	
BOOST/VACUUM	30 IN. HG/30 PSI	—	—	5703	5803	—	—	
BOOST/VACUUM	30 IN. HG/45 PSI	—	—	5708	—	—	—	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING.
BOOST/VACUUM	60 CM.HG-2.0 BAR	—	—	5703-M	—	—	—	
BOOST/VACUUM W/PEAK & WARNING	30 IN.HG./15 PSI	5776	—	—	—	—	—	INCLUDES MAP SENSOR, UNIVERSAL T-FITTING, 8' WIRING HARNESS, & 10 1/2" NYLON TUBING.
BOOST/VACUUM W/PEAK & WARNING	30 IN.HG./30 PSI	5777	5877	—	—	—	—	
CLOCK-ANALOG		—	—	—	—	5785	5885	12 HOUR, QUARTZ MOVEMENT WITH SECOND HAND.
DIESEL FUEL RAIL PRESSURE	0-30,000 PSI	5786	—	—	—	—	—	2003-2007.5 DODGE CUMMINS 5.9L & LB7 & LLY GM DURAMAX ENGINES ONLY *.
DIESEL FUEL RAIL PRESSURE	0-30,000 PSI	5793	—	—	—	—	—	2007.5 & NEWER DODGE CUMMINS 6.7L & LBZ & LMM 5M DURAMAX ENGINES ONLY *.
DIESEL HPOP PRESSURE	0-4,000 PSI	5796	—	—	—	—	—	1994-2007 FORD POWERSTROKE 7.3L & 6.0L ENGINES ONLY *.
DIFFERENTIAL TEMPERATURE	100°-250° F	—	—	—	—	5749	—	INCLUDES 1/8" NPT SENDER AND 3/8" AND 1/2" NPT ADAPTERS.
D-PIC ACCELEROMETER	-2G +2G	5781	—	—	—	—	—	MEASURES 8-FORCE, 1/4 MILE TIME, 0-60 TIME, & HORSHPWR. Ⓢ
DIGITAL PRO-SHIFT SYSTEM-LEVEL 1		5787	—	—	—	—	—	RED DIGITAL DISPLAY, AMBER LED INDICATORS. Ⓢ
DIGITAL PRO-SHIFT SYSTEM-LEVEL 2		5788	—	—	—	—	—	5 STAGE SHIFT POINT & MULTI COLOR LED. Ⓢ
EXHAUST PRESSURE	0-60 PSI	5792	—	5725	—	—	—	DIGITAL STEPPER MOTOR GAUGES INCLUDE 1/8" NPT SENDER AND 8' WIRING HARNESS, AND 6' COPPER LINE.
EXHAUST PRESSURE	0-100 PSI	5794	—	5726	—	—	—	MECHANICAL GAUGES INCLUDES 10' NYLON TUBING, 6' COPPER TUBING AND COMPRESSION FITTINGS. MUST BE MOUNTED OUTSIDE THE VEHICLE.
FUEL LEVEL	(0 Ω EMPTY/30 Ω FULL)	—	—	—	—	5717	—	WORKS WITH MOST PRE-1985 CHEVY/GM SENDERS.
FUEL LEVEL	(0 Ω EMPTY/90 Ω FULL)	—	—	—	—	5714	5814	WORKS WITH MOST 1985 TO 1997 CHEVY/GM SENDERS.
FUEL LEVEL	(16 Ω EMPTY/158 Ω FULL)	—	—	—	—	5718	—	WORKS WITH MOST 1989 (97 MUSTANG) AND LATER FORD.
FUEL LEVEL	(73 Ω EMPTY/10 Ω FULL)	—	—	—	—	5715	5815	WORKS WITH MOST PRE 1989 (PRE 87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER. SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR RE-PRODUCTION SENDERS.
FUEL LEVEL	(73 Ω EMPTY/0 Ω FULL) LINEAR	—	—	—	—	5719	—	WORKS WITH LINEAR 73-10 AFTERMARKET SENDERS.
FUEL LEVEL	(249 Ω EMPTY/33 Ω FULL)	—	—	—	—	5716	5816	WORKS WITH 240-33 OHMS SENDERS, INCLUDING AUTO METER 3827.
FUEL LEVEL PROGRAMMABLE	(0 Ω, 280 Ω)	5710	—	—	—	—	—	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING.
FUEL PRESSURE	0-15 PSI	5761	—	—	5810	—	—	DIGITAL STEPPER MOTOR FUEL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 8' WIRING HARNESS.
FUEL PRESSURE	0-30 PSI	5760	—	—	—	—	—	
FUEL PRESSURE	0-100 PSI	5763	5863	5712	5812	—	—	MECHANICAL FUEL PRESSURE GAUGES REQUIRE #4 BRAIDED LINE AND MOUNTING CUP AND MUST BE MOUNTED OUTSIDE THE VEHICLE.
FUEL PRESSURE	0-7 BAR	5763-M	—	—	—	—	—	
FUEL PRESSURE	0-1.0 BAR	—	—	5711-M	—	—	—	
FUEL PRESSURE WITH ISOLATOR	0-15 PSI	—	—	—	5813	—	—	INCLUDES ISOLATOR AND 4' LINE. REQUIRES BRAIDED LINE TO FUEL SOURCE.
NITROUS PRESSURE	0-1600 PSI	5774	—	—	—	—	—	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS.
NITROUS PRESSURE	0-2000 PSI	—	—	5728	5828	—	—	REQUIRES #4 BRAIDED LINE.
OIL PRESSURE	0-100 PSI	—	—	5721	5821	5727	5827	
OIL PRESSURE	0-150 PSI	—	—	5723	5823	—	—	MECHANICAL OIL PRESSURE GAUGES INCLUDE 6' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS.
OIL PRESSURE	0-200 PSI	—	—	—	5822	—	—	SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTING.
OIL PRESSURE	0-7 BAR	—	—	—	—	5727-M	—	
OIL TEMPERATURE	100°-250° F	—	—	—	—	5747	5847	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
OIL TEMPERATURE	140°-280° F	—	—	5741	5841	—	—	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.
OIL TEMPERATURE	60-150° C	—	—	—	—	5748-M	—	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
PRNDL + GEAR SHIFT INDICATOR GAUGE		5759	—	—	—	—	—	INCLUDES UNIVERSAL SENDER - FOR AUTOMATIC TRANSMISSION ONLY. Ⓢ
PYROMETER KIT	0°-1600° F	5744	5844	—	—	—	—	INCLUDES PROBE AND 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS, INCLUDING 1/8" NPT AND WELD-IN FITTING AND HOSE CLAMP METHOD.
PYROMETER KIT	0°-2000° F	5745	—	—	—	—	—	
PYROMETER KIT	0°-900° C	5744-M	—	—	—	—	—	
TRANSMISSION TEMPERATURE	100°-250° F	—	—	—	—	5757	5857	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
TRANSMISSION TEMPERATURE	140°-280° F	—	—	—	5851	—	—	INCLUDES 8' CAPILLARY TUBING AND 1/2" NPT FITTING.
VACUUM	30 IN. HG.	—	—	5784	5884	—	—	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING.
VOLTMETER	8-18 VOLTS	—	—	—	—	5791	5891	
WATER TEMPERATURE	100°-250° F	—	—	—	—	5737	5837	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE	120°-240° F	—	—	5732	5832	—	—	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.
WATER TEMPERATURE	140°-280° F	—	—	5731	5831	—	—	
WATER TEMPERATURE	40°-120° C	—	—	—	—	5737-M	—	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.





**PEDESTAL MOUNT TACHOMETERS**

THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/4"	5"
8,000 RPM		FEATURES ADJUSTABLE REDLINE POINTER	5780	—
10,000 RPM	MEMORY	PEAK RPM MEMORY RECALL	—	5795*
10,000 RPM	SHIFT-LITE	SHIFT-LITE TACHOMETER WITH EXTERNAL INCANDESCENT AMBER SHIFT-LITE	—	5899

(\* Compatible with 2,3,4,5,6,8,10, & 12 cylinder)

**IN-DASH TACHOMETERS**

OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/8"	5"
10,000 RPM	IN-DASH	FOR IN-DASH MOUNTING. SEE MOUNTING SOLUTIONS FOR CUP/PEDESTAL OPTIONS FOR 3 3/8" MODEL. 5" MODEL FITS IN A 4 5/8" HOLE.	5897	5898

**IN-DASH SPEEDOMETERS**

RANGE	DESCRIPTION	INFO	3 3/8"	5"
120 MPH	ELECTRIC	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	5887	—
160 MPH	ELECTRIC		5888	5889
190 KPH	ELECTRIC		5887-M	—
160 MPH	MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.	5893	5895
200 MPH	MECHANICAL		—	5896
140 MPH	GPS	GPS SPEEDOMETER INCLUDES ANTENNA. RALLY NAV DISPLAY SHOWS COMPASS/HEADING, GPS COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME.	5880	5881



*Carbon Fiber™*

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

## Tachometers

SHIFT-LITE TACHOMETER



4899

PRO-STOCK TACHOMETER



6836

IN-DASH TACHOMETER



4898

IN-DASH SPEEDOMETER/ELECTRIC



4889

## Speedometers & Tachometers

IN-DASH GPS SPEEDOMETER/  
ELECTRIC



4780

IN-DASH TACHOMETER



4798

## Instruments

Digital Stepper  
Motor

Vac/Boost



4777

Short Sweep  
Electric

VOLTMETER



4791

Full Sweep  
Mechanical

WATER  
TEMPERATURE



4731

WATER  
TEMPERATURE



4832



**DIGITAL STEPPER MOTOR**      **FULL SWEEP MECHANICAL**      **SHORT SWEEP ELECTRIC**

Ⓜ = DIGITAL GAUGE

GAUGES	RANGE	DIGITAL STEPPER MOTOR		FULL SWEEP MECHANICAL		SHORT SWEEP ELECTRIC		INFO
		2 1/8"	2 5/8"	2 1/8"	2 5/8"	2 1/8"	2 5/8"	
AIR FUEL RATIO-NARROWBAND (LEAN-RICH)		4775	—	—	—	—	—	WORKS WITH MOST FACTORY NARROW BAND SENSORS OR MODEL 2244
AIR FUEL RATIO-WIDEBAND PRO (AFR/LAMBDA)		4778	—	—	—	—	—	PRO INCLUDES BOSCH 4.2 O2 SENSOR
AIR PRESSURE	0-150 PSI	—	—	4720	—	—	—	INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST	0-35 PSI	—	—	4704	—	—	—	INCLUDES 10' NYLON TUBING, COMPRESSION FITTINGS & 1/8" TO 1/4" NPT ADAPTER FITTING
BOOST/VACUUM	30 IN. HG/20 PSI	—	—	4701	4801	—	—	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST/VACUUM	30 IN. HG/30 PSI	—	—	4703	4803	—	—	
BOOST/VACUUM <sup>W/PEAK &amp; WARNING</sup>	30 IN. HG/15 PSI	4776	—	—	—	—	—	INCLUDES MAP SENSOR, UNIVERSAL T-FITTING AND 3' WIRING HARNESS. PEAK RECALL, LED ALARM LIGHT
BOOST/VACUUM <sup>W/PEAK &amp; WARNING</sup>	30 IN. HG/30 PSI	4777	—	—	—	—	—	
BRAKE PRESSURE	0-1600 PSI	4867	—	—	—	—	—	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
FUEL LEVEL (0 ∅ EMPTY/90 ∅ FULL)		—	—	—	—	4714	4814	WORKS WITH MOST 1965 TO 1967 CHEVY/GM SENDERS
FUEL LEVEL (16 ∅ EMPTY/158 ∅ FULL)		—	—	—	—	4718	—	WORKS WITH MOST 1961-81 MUSTANG AND LATER FORD
FUEL LEVEL (73 ∅ EMPTY/110 ∅ FULL)		—	—	—	—	4715	4815	WORKS WITH MOST PPE 1989 PRE-87 MUSTANG FACTORY FORD AND MOST FACTORY CHRYSLER SENDER. MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
FUEL LEVEL (240 ∅ EMPTY/33 ∅ FULL)		—	—	—	—	4716	4816	WORKS WITH 240-OHM SENDERS, INCLUDING AUTO METER 3262
FUEL PRESSURE	0-15 PSI	4761	—	4711	4811	—	—	DIGITAL STEPPER MOTOR FUEL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 3' WIRING HARNESS.
FUEL PRESSURE	0-100 PSI	4763	4863	4712	4812	—	—	MECHANICAL FUEL PRESSURE GAUGES REQUIRE #4 BRAIDED LINE AND MOUNTING CLIP AND MUST BE MOUNTED OUTSIDE THE VEHICLE.
FUEL PRESSURE W/ISOLATOR	0-15 PSI	—	—	—	4813	—	—	INCLUDES ISOLATOR AND 4' LINE. REQUIRES BRAIDED LINE TO FUEL SOURCE
NITROUS PRESSURE	0-1600 PSI	4774	—	—	—	—	—	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
NITROUS PRESSURE	0-2000 PSI	—	—	4728	4828	—	—	REQUIRES #4 BRAIDED LINE
OIL PRESSURE	0-100 PSI	—	—	4721	4821	4727	4827	MECHANICAL OIL PRESSURE GAUGES INCLUDE 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS. SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1 1/2" NPT FITTING.
OIL TEMPERATURE	140°-280° F	—	—	4741	4841	—	—	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING
OIL TEMPERATURE	140°-300° F	—	—	—	—	4748	4848	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
PYROMETER KIT	0°-1600° F	4744	—	—	—	—	—	INCLUDES PROBE AND 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS, INCLUDING 1/8" NPT AND WELD-IN FITTING AND HOSE CLAMP METHOD.
TRANSMISSION TEMPERATURE	140°-280° F	—	—	—	4851	—	—	INCLUDES 8' CAPILLARY TUBING AND 1/2" NPT FITTING
TRANSMISSION TEMPERATURE	100°-250° F	—	—	—	—	4757	—	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
VACUUM	30 IN. HG	—	—	4784	4884	—	—	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
VACUUM	30 IN. HG	—	4871	—	—	—	—	INCLUDES MAP SENSOR, UNIVERSAL T-FITTING AND 3' WIRING HARNESS
VOLTMETER	8-18 VOLTS	—	—	—	—	4791	4891	
WATER TEMPERATURE	100°-250° F	—	—	—	—	4737	4837	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
WATER TEMPERATURE	100°-260° F	—	—	4731	4831	—	—	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING
WATER TEMPERATURE	120°-240° F	—	—	4732	4832	—	—	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING

**PEDESTAL MOUNT TACHOMETER**

THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/8"	5"
9,000 RPM	SHIFT-LITE	PRO-STOCK MEMORY. INCLUDES 12 LED SUPER LITE AND FEATURES 4 SEPARATE SHIFT POINTS (4 STAGE)	6835	
10,000 RPM	SHIFT-LITE	SHIFT-LITE. INCLUDES EXTERNAL INCANDESCENT SHIFT LIGHT	4899	
11,000 RPM	SHIFT-LITE	PRO-STOCK MEMORY. INCLUDES 12 LED SUPER LITE AND FEATURES 4 SEPARATE SHIFT POINTS (4 STAGE)	6836	

**IN-DASH TACHOMETERS**

OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/8"	5"
10,000 RPM	IN-DASH	SEE MOUNTING SOLUTIONS FOR CUP/PEDESTAL OPTIONS FOR 3 3/8" MODELS. 5" MODEL FITS INTO A 4 5/8" HOLE.	4798	4898
10,000 RPM	MEMORY	FEATURES MEMORY TO 'RECALL' THE HIGHEST RPM DURING A RUN. MOUNT IN A 3-3/8" HOLE	—	4894

**IN-DASH SPEEDOMETERS**

RANGE	DESCRIPTION	INFO	3 3/8"	5"
160 MPH	ELECTRIC	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	4789	4889
160 MPH	MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.	4793	
140 MPH	GPS	GPS SPEEDOMETER INCLUDES ANTENNA. RALLY NAV DISPLAY SHOWS COMPASS/HEADING, GPS COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME.	4780	4881

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

**Tachometers**

SHIFT-LITE TACHOMETER



6857

IN-DASH TACHOMETER



5160

IN-DASH TACHOMETER



5161

**Speedometers & Tachometers**

IN-DASH SPEEDOMETER/ELECTRIC



5189

IN-DASH SPEEDOMETER/MECHANICAL



5153

PEDESTAL TACHOMETER



5610

**Instruments**

Liquid Filled Full Sweep Mechanical

OIL PRESSURE



5421

WATER TEMPERATURE



5432

Short Sweep Electric

VOLTMETER



5492

Digital Stepper Motor

LOW TEMP. WATER TEMP.



5469

The "Super Bezel" is a registered trademark of Auto Meter Products, Inc.



**PRO-COMP™**

GAUGES	RANGE	DIGITAL STEPPER MOTOR	FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	INFO
		2 5/8"	2 5/8"	2 5/8"	
BLOWER PRESSURE	0-60 PSI	—	* 5402	—	INCLUDES 10' NYLON TUBING, 1/8" & 1/4" NPT FITTINGS.
BLOWER PRESSURE w/ MEMORY	0-60 PSI	—	* 5403	—	INCLUDES 3200 MEMORY KIT. REQUIRES #4 LINE.
BOOST	0-35 PSI	—	* 5404	—	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING.
BOOST/VACUUM	30 IN. HG/20 PSI	—	* 5401	—	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING.
BRAKE PRESSURE	0-2000 PSI	—	* 5426	—	INCLUDES T-FITTING 3/8" OD X 1/8"-20 NPT FITTING. USE ONLY APPROVED BRAKE LINES.
FUEL LEVEL	(0 Ω EMPTY/90 Ω FULL)	—	—	5415	WORKS WITH MOST 1986 TO 1997 CHEVY/GM SENDERS.
FUEL LEVEL	(73 Ω EMPTY/10 Ω FULL)	—	—	5416	WORKS WITH MOST PRE-1989 (PRE-87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER. SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
FUEL LEVEL	(240 Ω EMPTY/33 Ω FULL)	—	—	5417	WORKS WITH 240-33 OHM SENDERS, INCLUDING AUTO METER 3262.
FUEL PRESSURE	0-15 PSI	5461	* 5411	—	DIGITAL STEPPER MOTOR FUEL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 3' WIRING HARNESS. MECHANICAL FUEL PRESSURE GAUGES REQUIRE #4 BRAIDED LINE AND MOUNTING CLIP AND MUST BE MOUNTED OUTSIDE THE VEHICLE.
FUEL PRESSURE	0-100 PSI	—	* 5412	—	
FUEL PRESSURE WITH ISOLATOR	0-15 PSI	—	* 5413	—	INCLUDES ISOLATOR AND 4' LINE. REQUIRES BRAIDED LINE TO FUEL SOURCE.
LOW TEMP. WATER TEMP.	60°-210° F	5469	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS, 3' WIRING HARNESS.
OIL PRESSURE	0-100 PSI	—	* 5421	5427	MECHANICAL OIL PRESSURE GAUGES INCLUDE 8' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS. SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTING.
OIL PRESSURE	0-200 PSI	—	* 5422	—	INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS.
OIL TEMPERATURE	140°-280° F	—	* 5441	—	INCLUDES 5' CAPILLARY TUBING AND 1/2" NPT FITTING.
OIL TEMPERATURE	140°-280° F	—	* 5443	—	INCLUDES 12' CAPILLARY TUBING AND 1/2" NPT FITTING.
OIL TEMPERATURE	140°-300° F	—	—	5447	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
PRESSURE	0-300 PSI	—	* 5423	—	
PRESSURE	0-400 PSI	—	* 5424	—	
PRESSURE	0-600 PSI	—	* 5425	—	REQUIRES #4 BRAIDED HOSE KIT.
PYROMETER KIT	0°-1600° F	5444	—	—	INCLUDES PROBE AND 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS, INCLUDING 1/8" NPT AND WELD-IN FITTING AND HOSE CLAMP MOUNT.
TEMPERATURE	140°-340° F	—	* 5435	—	
TRANSMISSION TEMPERATURE	140°-280° F	—	* 5451	—	INCLUDES 3' CAPILLARY TUBING AND 1/2" NPT FITTING.
TRANSMISSION TEMPERATURE	100°-250° F	—	—	5457	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
VACUUM	30 IN. HG	—	* 5484	—	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING.
VOLTMETER	8-18 VOLTS	—	—	5492	
WATER TEMPERATURE	100°-250° F	—	—	5437	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE	120°-240° F	—	* 5433	—	INCLUDES 12' CAPILLARY TUBING AND 1/2" NPT FITTING.
WATER TEMPERATURE	120°-240° F	—	* 5432	—	
WATER TEMPERATURE	140°-280° F	—	* 5431	—	INCLUDES 5' CAPILLARY TUBING AND 1/2" NPT FITTING.

\* - Liquid Filled Models

**PEDESTAL MOUNT TACHOMETER**

THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/4"	5"
6,000 RPM	DIESEL	INCLUDES PROBE. FABRICATION IS REQUIRED. MODIFICATIONS TO BALANCER OR FLYWHEEL ARE REQUIRED.	—	6806
9,000 RPM	DUAL RANGE MEMORY	FEATURES 2 STAGE SHIFT LIGHT AND PEAK RPM MEMORY. INCLUDES LED AMBER QUICK-LITE SHIFT LIGHT	—	6852
9,000 RPM	MEMORY	PEAK RPM MEMORY TO RECALL THE HIGHEST RPM ACHIEVED DURING A RACE.	—	6851
9,000 RPM	MEMORY	PEAK RPM MEMORY TO RECALL THE HIGHEST RPM ACHIEVED DURING A RACE.	—	6809
10,000 RPM	STANDARD	ELECTRIC	5610	—
10,000 RPM	MEMORY	FEATURES MEMORY INCLUDES REMOTE MOUNTED MEMORY SWITCH	6601	—
11,000 RPM	MEMORY	FEATURES MEMORY TO RECALL THE HIGHEST RPM ACHIEVED DURING A RACE.	—	6811
11,000 RPM	MEMORY	FEATURES 2 STAGE SHIFT LIGHT AND PEAK RPM MEMORY. INCLUDES LED AMBER QUICK-LITE SHIFT LIGHT.	—	6857

**IN-DASH TACHOMETERS**

OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/8"	5"
10,000 RPM	IN-DASH	FOR IN-DASH MOUNTING	5161	5160
10,000 RPM	MEMORY	FEATURES MEMORY TO RECALL HIGHEST RPM	—	6801

**IN-DASH SPEEDOMETERS**

RANGE	DESCRIPTION	INFO	3 3/8"	5"
120 MPH	IN-DASH/MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.	5152	—
160 MPH	IN-DASH/MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.	5153	5154
160 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH 6PS MODULE 5289	—	5189
200 MPH	IN-DASH/MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.	—	5156

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

## Tachometers

STREET TACHOMETER



2894

IN-DASH TACHOMETER



2699

TACHOMETER



2892

IN-DASH TACHOMETER



2698

## Speedometers & Tachometers

IN-DASH SPEEDOMETER/  
MECHANICAL



2692

IN-DASH SPEEDOMETER/  
ELECTRIC



2688

IN-DASH GPS SPEEDOMETER/  
ELECTRIC



2680

DIESEL TACHOMETER



2888

## Instruments

Digital Stepper  
Motor

PYROMETER



2654

Short Sweep  
Electric

OIL  
PRESSURE



2634

Full Sweep  
Mechanical

AIR  
PRESSURE



2620

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

Z-SERIES™

GAUGES	RANGE	DIGITAL STEPPER MOTOR	FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	INFO
		2 1/16"	2 1/16"	2 1/16"	
AIR FUEL RATIO-NARROWBAND (LEAN-RICH)		2675	—	—	WORKS WITH MOST VAPOR AND TD SENSORS AND MODEL 224. SEE WIDEBAND AIR FUEL PAGE FOR MORE INFO. PRO INCLUDES BOSCH O2 SENSOR. PROGRAMMABLE RANGE. SEE WIDEBAND AIR FUEL PAGE FOR MORE INFO.
AIR FUEL RATIO-WIDEBAND (AFR/LAMBDA)		5978	—	—	INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS.
AIR PRESSURE	0-150 PSI	—	2620	—	REQUIRES TO GAUGE WIRE. DO NOT USE WITH CHARGING SYSTEMS OVER 60 AMPS.
AMMETER	60-0-60 AMPS	—	—	2644	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING.
BOOST	0-35 PSI	—	2616	—	INCLUDES 10' NYLON TUBING & UNIVERSAL T-FITTING.
BOOST	0-60 PSI	—	2617	—	INCLUDES 10' NYLON TUBING & UNIVERSAL T-FITTING.
BOOST	0-100 PSI	—	2618	—	INCLUDES 10' NYLON TUBING AND 1/8" & 1/4" NPT FITTINGS.
BOOST CONTROLLER	30 IN. HG/30 PSI	2681	—	—	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING AND 8' WIRING HARNESS. BOOST CONTROL SOLENOID.
BOOST/VACUUM	30 IN. HG/20 PSI	—	2601	—	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING.
BOOST/VACUUM	30 IN. HG/30 PSI	—	2614	—	QUARTZ MOVEMENT WITH SECOND HAND.
CLOCK		2632	—	—	2008-2002.5 DODGE CUMMINS 5.9L & 187 & LLY GM DURAMAX ENGINES ONLY.*
DIESEL FUEL RAIL PRESSURE	0-30,000 PSI	2686	—	—	2007.5 & NEWER DODGE CUMMINS 6.7L & LBZ & LMM 6M DURAMAX ENGINES ONLY.*
DIESEL FUEL RAIL PRESSURE	0-30,000 PSI	2693	—	—	1994-2007.3L & 6.0L FORD POWERSTROKE ENGINES ONLY.*
DIESEL HPOP PRESSURE	0-4,000 PSI	2696	—	—	INCLUDES 1/8" NPT SENDER AND 3/8" AND 1/2" NPT ADAPTERS.
DIFFERENTIAL TEMPERATURE	100°-250° F	—	—	2636	DIGITAL STEPPER MOTOR GAUGES INCLUDE 1/8" NPT SENDER AND 8' WIRING HARNESS, AND 6' COPPER LINE.
EXHAUST PRESSURE	0-60 PSI	2672	2611	—	MECHANICAL GAUGES INCLUDES 10' NYLON TUBING, 6' COPPER TUBING AND COMPRESSION FITTINGS. MUST BE MOUNTED OUTSIDE THE VEHICLE.
EXHAUST PRESSURE	0-100 PSI	2674	2619	—	WORKS WITH MOST PRE-1988 CHEVY/GM SENSORS.
FUEL LEVEL	(0 Q EMPTY/30 Q FULL)	—	—	2648	WORKS WITH MOST PRE-1988 CHEVY/GM SENSORS.
FUEL LEVEL	(0 Q EMPTY/30 Q FULL)	—	—	2641	WORKS WITH MOST 1989 TO 1997 CHEVY/GM SENSORS.
FUEL LEVEL	(73 Q EMPTY/10 Q FULL)	—	—	2642	WORKS WITH MOST PRE-1988 FORD MUSTANG FACTORY FORD AND MUST FACTORY CHRYSLER. SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENSORS.
FUEL LEVEL	(73 Q EMPTY/10 Q FULL) LINEAR	—	—	2650	WORKS WITH LINEAR 73-10 AFTERMARKET SENSORS.
FUEL LEVEL	(240 Q EMPTY/33 Q FULL)	—	—	2643	WORKS WITH 240-33 OHM SENSORS, INCLUDING AUTO METER 3262.
FUEL PRESSURE	0-15 PSI	2661	2603	—	FULL SWEEP ELECTRIC FUEL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 8' WIRING HARNESS.
FUEL PRESSURE	0-30 PSI	2660	—	—	MECHANICAL FUEL PRESSURE GAUGES REQUIRE 4-BRANCHED LINE AND MOUNTING CUP AND MUST BE MOUNTED OUTSIDE THE VEHICLE.
FUEL PRESSURE	0-100 PSI	2663	2612	—	MECHANICAL OIL PRESSURE GAUGE INCLUDE 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS.
OIL PRESSURE	0-100 PSI	—	2604	2634	SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTING.
OIL PRESSURE	0-200 PSI	—	2605	—	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
OIL TEMPERATURE	100°-250° F	—	—	2638	INCLUDES 1/8" CAPILLARY TUBING AND 1/2" NPT FITTING.
OIL TEMPERATURE	140°-280° F	—	2609	—	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
OIL TEMPERATURE	140°-300° F	—	—	2639	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
PYROMETER KIT	0°-1600° F	2654	—	—	INCLUDES PROBE W/ MOUNTING OPTIONS.
TRANSMISSION TEMPERATURE	100°-250° F	—	—	2640	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
TRANSMISSION TEMPERATURE	140°-280° F	—	2615	—	INCLUDES 1/8" CAPILLARY TUBING AND 1/2" NPT FITTING.
VACUUM	30 IN. HG.	—	2610	—	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING.
VOLTMETER	8-18 VOLTS	—	—	2645	FOR 24 VOLT ELECTRICAL SYSTEMS.
VOLTMETER	16-36 VOLTS	—	—	2651	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
WATER TEMPERATURE	100°-250° F	—	—	2635	INCLUDES 1/8" CAPILLARY TUBING AND 1/2" NPT FITTING.
WATER TEMPERATURE	120°-240° F	—	2607	—	
WATER TEMPERATURE	140°-280° F	—	2606	—	

\* Works with factory sensors/parameters

**PEDESTAL MOUNT TACHOMETER** THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST STANDARD AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	2 5/8"	3 3/4"
4,000 RPM	LOW REV	IDEAL FOR TOWING OR RV'S	2890	—
5,000 RPM	DIESEL	DIESEL INCLUDES PICK-UP THAT STRAPS TO ALTERNATOR	2888	—
6,000 RPM	LOW REV	MINI TACH WITH ADJUSTABLE MOUNTING CUP	2891	—
8,000 RPM	STREET		2892	2894

**IN-DASH TACHOMETERS** OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST STANDARD AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	2 1/16"	3 3/8"
5,000 RPM	IN-DASH	FOR PILLAR OR CUP MOUNTING. SEE MOUNTING SOLUTIONS FOR MORE DETAILS.	2697	—
8,000 RPM	IN-DASH		2698	2699

**IN-DASH SPEEDOMETERS**

RANGE	DESCRIPTION	INFO	3 3/8"
120 MPH	IN-DASH/MECHANICAL	5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED	2692
160 MPH	IN-DASH/MECHANICAL		2694
160 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	2688
140 MPH	GPS	GPS SPEEDOMETER INCLUDES ANTENNA. RALLY NAV DISPLAY SHOWS COMPASS/HEADING, GPS COORDINATES, PEAK SPEED, RECALL, HOUR/METER, AND DATE & TIME.	2680

# TRADITIONAL CHROME

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

## Speedometers & Tachometers

IN-DASH SPEEDOMETER/  
PROGRAMMABLE ELECTRIC



IN-DASH SPEEDOMETER/  
MECHANICAL



IN-DASH GPS SPEEDOMETER/  
ELECTRIC



RETRO TACHOMETER



## Instruments

Short Sweep  
Electric

WATER  
TEMPERATURE



VOLTMETER



OIL  
PRESSURE



Full Sweep  
Mechanical

WATER  
TEMPERATURE



# COBRA

## Speedometers & Tachometers

IN-DASH SPEEDOMETER/  
MECHANICAL



IN-DASH SPEEDOMETER/  
PROGRAMMABLE ELECTRIC



IN-DASH  
TACHOMETER



Full Sweep  
Mechanical



Short Sweep  
Electric

WATER  
TEMPERATURE







# TRADITIONAL CHROME & COBRA

GAUGES	RANGE	FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	INFO
		2 1/16"	2 1/16"	
AMMETER	60-0-60 AMPS	—	2586	REQUIRES 10 GAUGE WIRE (NOT FOR USE ON APPLICATIONS WHERE CHARGING SYSTEM PRODUCES MORE THAN 60 AMPS)
BOOST/VACUUM	30 IN. HG/20 PSI	2401	—	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
BOOST/VACUUM	30 IN. HG/30 PSI	2403	—	
CLOCK-ANALOG	—	—	2585	12 HOUR QUARTZ MOVEMENT WITH SECOND HAND
FUEL LEVEL	(0 Ω EMPTY/30 Ω FULL)	—	2517	WORKS WITH MOST PRE-1986 CHEVY/GM SENDERS
FUEL LEVEL	(0 Ω EMPTY/30 Ω FULL)	—	2514	WORKS WITH MOST 1966 TO 1997 CHEVY/GM SENDERS
FUEL LEVEL	(16 Ω EMPTY/158 Ω FULL)	—	2518	WORKS WITH MOST 1989 '87 MUSTANG AND LATER FORD
FUEL LEVEL	(73 Ω EMPTY/10 Ω FULL)	—	2515	WORKS WITH MOST PRE-1989 (PRE-87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER, SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS
FUEL LEVEL	(73 Ω EMPTY/10 Ω FULL) LINEAR	—	2519	WORKS WITH LINEAR 73-13 AFTERMARKET SENDERS
FUEL LEVEL	(240 Ω EMPTY/33 Ω FULL)	—	2516	WORKS WITH 240-33 OHMS SENDERS INCLUDING AUTO METER 3282
FUEL PRESSURE	0-15 PSI	2411	—	REQUIRES #6 BRAIDED LINE AND MOUNTING CUP
FUEL PRESSURE	0-100 PSI	2412	—	MUST BE MOUNTED OUTSIDE THE VEHICLE
FUEL PRESSURE W/SOLATOR	0-15 PSI	2413	—	INCLUDES ISOLATOR & 4' LINE, REQUIRES BRAIDED LINE TO FUEL SOURCE
HOURMETER	8-32 VOLTS DC INPUT	—	2587	NON-RESETTABLE W/ QUARTZ ACCURACY FOR UP TO 10,000 HOURS
OIL PRESSURE	0-100 PSI	2421	2522	MECH GAUGES INCLUDE 10' NYLON TUBING & 1/8" & 1/4" NPT FITTINGS
OIL PRESSURE	0-200 PSI	2422	—	SHORT SWEEP ELEC GAUGES INCLUDE 1/8" NPT SENDER & 1/4" NPT FITTING
OIL TEMPERATURE	100°-250° F	—	2542	INCLUDES 1/8" NPT SENDER & 3/8" & 1/2" NPT FITTINGS
OIL TEMPERATURE	140°-280° F	2441	—	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING
OIL TEMPERATURE	140°-300° F	—	2543	INCLUDES 1/8" NPT SENDER & 1/2" NPT FITTING
TRANSMISSION TEMPERATURE	100°-250° F	—	2552	INCLUDES 1/8" NPT SENDER & 3/8" & 1/2" NPT FITTINGS
TRANSMISSION TEMPERATURE	140°-280° F	2451	—	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING
VACUUM	30 IN. HG.	2484	—	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
VOLTMETER	8-18 VOLTS	—	2592	—
WATER TEMPERATURE	100°-250° F	—	2592	INCLUDES 1/8" NPT SENDER & 3/8" & 1/2" NPT FITTINGS
WATER TEMPERATURE	120°-240° F	2432	—	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING
WATER TEMPERATURE	120°-240° F	2433	—	INCLUDES 12' CAPILLARY TUBING AND 1/2" NPT FITTING
WATER TEMPERATURE	140°-280° F	2431	—	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING

## TACHOMETERS

THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	2 5/8"	3 3/4"	3 3/8"
8,000 RPM	MINI TACH	PEDESTAL FEATURES SUPER BEZEL & CHROME CASE	2893	—	—
8,000 RPM	STREET	PEDESTAL FEATURES SUPER BEZEL & INCLUDES ADJUSTABLE REDLINE POINTER & CHROME CASE	—	2895	—
8,000 RPM	RETRO	PEDESTAL SHORT SWEEP TACHOMETER FEATURING SUPER BEZEL & CHROME CASE	—	2897	—
8,000 RPM	IN-DASH	FOR IN-DASH MOUNTING. SEE MOUNTING SOLUTIONS FOR CUP/PEDESTAL OPTIONS.	—	—	2499

## IN-DASH SPEEDOMETERS

RANGE	DESCRIPTION	INFO	3 3/8"
120 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	2489
120 MPH	IN-DASH/MECHANICAL	FOR IN-DASH MOUNTING 5/8"-18 THREADED CABLE INPUT, SPEEDOMETER CABLE IS REQUIRED.	2492
160 MPH	IN-DASH/MECHANICAL	FOR IN-DASH MOUNTING 5/8"-18 THREADED CABLE INPUT, SPEEDOMETER CABLE IS REQUIRED.	2494
140 MPH	GPS	GPS SPEEDOMETER INCLUDES ANTENNA RALLY NAV DISPLAY SHOWS COMPASS/HEADING, GPS COORDINATES, PEAK SPEED RECALL, HOURMETER, AND DATE & TIME	2480



## IN-DASH TACHOMETER

OPERATES ON MOST 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	4"
8,000 RPM	IN-DASH	IN-DASH MOUNT, 8 CYLINDER ONLY	201004

## IN-DASH SPEEDOMETERS

RANGE	DESCRIPTION	INFO	4"
180 MPH	IN-DASH/MECHANICAL	REVERSE SWEEP, 5/8"-18 THREADED CABLE INPUT, SPEEDOMETER CABLE REQUIRED. REVERSING ADAPTER 490040 MAY BE NECESSARY FOR SOME APPLICATIONS	201005
180 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETER, REVERSE SWEEP, OPERATES WITH MANY FACTORY AND AFTER MARKET SPEED SENSORS. ALSO COMPATIBLE WITH GPS MODULE 5289	201013

GAUGES	RANGE	FULL SWEEP MECHANICAL	SHORT SWEEP ELECTRIC	INFO
		2 1/16"	2 1/16"	
CLOCK-ANALOG	—	—	201019	12 HOUR QUARTZ MOVEMENT WITH SECOND HAND
FUEL LEVEL	(16 Ω EMPTY/158 Ω FULL)	—	201975	WORKS WITH MOST 1989 '87 MUSTANG AND LATER FORD
FUEL LEVEL	(240 Ω EMPTY/33 Ω FULL)	—	201011	WORKS WITH 240-33 OHM SENDERS, INCLUDING AUTO METER 3282
OIL PRESSURE	0-100 PSI	201006	—	INCLUDES 10' NYLON TUBING & 1/8" & 1/4" NPT FITTINGS
OIL PRESSURE	0-100 PSI	—	201014	INCLUDES 1/8" NPT SENDER AND 1/4" NPT FITTING
OIL TEMPERATURE	100°-250° F	—	201018	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT ADAPTER
OIL TEMPERATURE	60°-140° C	201008	—	INCLUDES 1/8" NPT SENDER & 3/8" & 1/2" NPT FITTINGS
VOLTMETER	8-18 VOLTS	—	201009	—
WATER TEMPERATURE	60°-140° C	201007	—	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING
WATER TEMPERATURE	100°-250° F	—	201015	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT ADAPTER



## Tachometer

Not all racing is done on a clean and well lit track. Ultra-Nite gauges are for drivers who dare to hit the dirt and clay tracks. Easily identified by the anodized blue bezels, Ultra-Nite gauges offer a unique design for sprint cars and other related forms of dirt track racing. The luminescent dials glow green at night for dimly lit tracks when no battery is available to light conventional instruments. Also available in Liquid Filled Mechanical for use in the most demanding high shock and vibration racing environments. For RACING USE ONLY, not intended for street applications.

**IN-DASH MEMORY TACHOMETER**



## Instruments

*Full Sweep Mechanical*

*Liquid Filled Full Sweep Mechanical*

**FUEL PRESSURE**

**WATER TEMPERATURE**

**LIQUID FILLED OIL PRESSURE**

**LIQUID FILLED WATER TEMPERATURE**



**IN-DASH TACHOMETER**

OPERATES ON MOST 4, 6, AND 8 CYLINDER ENGINES AND IS COMPATIBLE WITH MOST POINTS, STANDARD, AND ELECTRONIC IGNITIONS. GAUGE GLOWS IN THE DARK.

RANGE	INFO	5"
10,000 RPM	FEATURES PEAK RPM MEMORY WITH REMOTE MOUNTED RECALL SWITCH.	4594

GAUGES	RANGE	2 5/8"	LFG	INFO
FUEL PRESSURE	0-15 PSI	4511	4211	REQUIRES #4 BRAIDED LINE AND MOUNTING CUP AND MUST BE MOUNTED OUTSIDE THE VEHICLE. NO LIGHTING INCLUDED, GAUGE GLOWS IN THE DARK.
OIL PRESSURE	0-100 PSI	4521	4221	REQUIRES TUBING (BRAIDED STAINLESS STEEL OR COPPER RECOMMENDED). NO LIGHTING INCLUDED, GAUGE GLOWS IN THE DARK.
OIL PRESSURE	0-150 PSI	4523	4223	
OIL TEMPERATURE	140°-280° F	4541	4241	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING. NO LIGHTING INCLUDED, GAUGE GLOWS IN THE DARK.
WATER TEMPERATURE	120°-240° F	4532	-	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING. NO LIGHTING INCLUDED, GAUGE GLOWS IN THE DARK.
WATER TEMPERATURE	140°-280° F	4535	4235	INCLUDES 4' CAPILLARY TUBING AND 1/2" NPT FITTING. NO LIGHTING INCLUDED, GAUGE GLOWS IN THE DARK.
WATER TEMPERATURE	140°-280° F	4531	4231	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING. NO LIGHTING INCLUDED, GAUGE GLOWS IN THE DARK.



# METRIC

### IN-DASH ELECTRIC SPEEDOMETER

SIZE	RANGE	ULTRA-LITE	SPORT-COMP	CARBON FIBER	PHANTOM	AMERICAN MUSCLE	ARCTIC WHITE	DESIGNER BLACK	OLD TYME WHITE	ANTIQUÉ BEIGE	INFO
5"	260 KPH	4489-M	—	—	—	—	—	—	—	—	PROGRAMMABLE SPEEDOMETERS WORK WITH MOST FACTORY VEHICLE SPEED SENSORS. SENDERS ARE AVAILABLE FOR SOME CABLE APPLICATIONS. SEE ACCESSORIES. ALSO COMPATIBLE WITH GPS MODULE 5269.
3 3/8"	260 KPH	—	—	—	—	1288-M	—	—	—	—	
3 3/8"	190 KPH	4487-M	3987-M	4787-M	5887-M	—	—	—	—	—	
3 1/8"	190 KPH	—	—	—	—	—	1388-M	1487-M	1688-M	1887-M	

### STREET ROD KITS

SIZE	ARCTIC WHITE	DESIGNER BLACK	OLD TYME WHITE	ANTIQUÉ BEIGE	INFO
3 1/8" 5 PIECE ELECTRIC SPEEDO KIT 190 KPH ELECTRIC SPEEDOMETER (LCD ODOMETER)	1302-M	1421-M	1602-M	1809-M	INCLUDES 3 1/8" ELECTRIC PROGRAMMABLE SPEEDOMETER WITH LCD ODOMETER, 2 1/16" 100°-250° F WATER TEMP, 0-100 PSI OIL PRESS, 240 Ω E-33 Ω FUEL LEVEL, AND 8-18 VOLT METER.

### SPORT-COMP™

GAUGES	RANGE	DIGITAL STEPPER MOTOR		FULL SWEEP MECH.		SHORT SWEEP ELEC.		INFO
		2 1/16"	2 5/16"	2 1/16"	2 5/16"	2 1/16"	2 5/16"	
BOOST	0-2.5 KG/CM2	—	—	3304-J	3404-J	—	—	INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
BOOST/VACUUM	60 CM./HG-2.0 BAR	—	—	3303-M	—	—	—	
BOOST/VACUUM	60 CM./HG-2.0 KG/CM2	—	—	3303-J	3401-J	—	—	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
FUEL PRESSURE	0-7 BAR	3363-M	—	—	—	—	—	
FUEL PRESSURE	0-1.0 BAR	—	—	3311-M	—	—	—	REQUIRES #4 BRAIDED LINE AND MOUNTING CUP AND MUST BE MOUNTED OUTSIDE THE VEHICLE
FUEL PRESSURE	0-1.0 KG/CM2	—	—	3311-J	—	—	—	
FUEL PRESSURE	0-7 KG/CM2	—	—	3312-J	3412-J	—	—	INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
OIL PRESSURE	0-7 KG/CM2	—	—	—	3421-J	—	—	
OIL PRESSURE	0-14 KG/CM2	—	—	3322-J	—	—	—	INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
OIL PRESSURE	0-7 BAR	—	—	—	—	3327-M	3522-M	INCLUDES 1/8" NPT SENDER AND 1/4" NPT FITTING
OIL TEMPERATURE	60°-140° C	—	—	3341-M	—	—	—	INCLUDES 8' CAPILLARY TUBING AND 1/2" NPT FITTING
OIL TEMPERATURE	40-120° C	—	—	—	—	—	3542-M	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
OIL TEMPERATURE	60°-170° C	—	—	—	—	3348-M	3543-M	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
PYROMETER KIT (EGT)	0°-900° C	3344-M	—	—	—	—	—	INCLUDES PROBE AND 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS, INCLUDING 1/8" NPT AND WELD-IN FITTING AND HOSE CLAMP METHOD.
WATER TEMPERATURE	40°-120° C	—	—	—	—	3337-M	—	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
WATER TEMPERATURE	60°-140° C	—	—	—	3431-M	—	—	INCLUDES 8' CAPILLARY TUBING AND 1/2" NPT FITTING
WATER TEMPERATURE	50°-115° C	—	—	3332-M	—	—	—	INCLUDES 8' CAPILLARY TUBING AND 1/2" NPT FITTING

### ULTRA-LITE™ Phantom®

GAUGES	RANGE	DIGITAL STEPPER MOTOR			FULL SWEEP MECH.			SHORT SWEEP ELEC.			INFO	
		2 1/16"	2 5/16"	2 5/16"	2 1/16"	2 5/16"	2 5/16"	2 1/16"	2 5/16"	2 5/16"		
BOOST/VACUUM	60 CM./HG-2.0 BAR	—	—	—	4303-M	—	—	—	—	5703-M	—	INCLUDES 10' NYLON TUBING AND UNIVERSAL T-FITTING
FUEL PRESSURE	0-7 BAR	4363-M	—	—	—	—	—	—	—	5763-M	—	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
FUEL PRESSURE	0-1.0 BAR	—	—	—	4311-M	—	—	—	—	5711-M	—	REQUIRES #4 BRAIDED LINE AND MOUNTING CUP AND MUST BE MOUNTED OUTSIDE THE VEHICLE
OIL PRESSURE	0-7 KG/CM2	—	—	—	—	4421-J	—	—	—	—	—	INCLUDES 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS
OIL PRESSURE	0-7 BAR	—	—	—	—	—	4327-M	—	—	—	5727-M	INCLUDES 1/8" NPT SENDER AND 1/4" NPT FITTING
OIL TEMPERATURE	60°-170° C	—	—	—	—	—	4346-M	—	—	—	5746-M	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
PYROMETER KIT (EGT)	0°-900° C	4344-M	—	—	—	—	—	—	—	5744-M	—	INCLUDES PROBE AND 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS, INCLUDING 1/8" NPT AND WELD-IN FITTING AND HOSE CLAMP METHOD.
WATER TEMPERATURE	40°-120° C	—	—	—	—	—	4337-M	—	—	—	5737-M	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
WATER TEMPERATURE	60°-140° C	—	—	—	4431-M	—	—	—	—	—	—	INCLUDES 8' CAPILLARY TUBING AND 1/2" NPT FITTING



### COBALT™ VESA

GAUGES	RANGE	FULL SWEEP ELEC.		FULL SWEEP MECH.		SHORT SWEEP ELEC.		INFO
		2 1/16"	2 5/16"	2 1/16"	2 5/16"	2 1/16"	2 5/16"	
BOOST/VACUUM	60 CM./HG-2.0 BAR	—	—	6103-M	—	—	5903-M	MECHANICAL GAUGES INCLUDE 10' NYLON TUBING AND UNIVERSAL T-FITTING
OIL PRESSURE	0-7 BAR	—	—	—	6127-M	—	—	SHORT SWEEP ELECTRIC OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTINGS
OIL TEMPERATURE	60°-170° C	—	—	—	6148-M	—	—	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS
PYROMETER KIT (EGT)	0°-900° C	6144-M	—	—	—	5944-M	—	INCLUDES PROBE AND 10' OF THERMOCOUPLE WIRE. PROBE INCLUDES MULTIPLE MOUNTING OPTIONS, INCLUDING 1/8" NPT AND WELD-IN FITTING
WATER TEMPERATURE	40°-120° C	—	—	—	6137-M	—	—	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS

**Tachometers**

SPORT-COMP TACHOMETER



6397

ULTRA-LITE MINI MONSTER™ TACHOMETER



6599

COBALT MINI MONSTER™ TACHOMETER



6999

**Speedometers**

SPORT-COMP IN-DASH TACH/SPEEDO COMBO



6387

ULTRA-LITE IN-DASH SPEEDOMETER/ELECTRIC



6588

COBALT IN-DASH SPEEDOMETER/ELECTRIC



6988

**Instruments**

*Digital*  
SPORT-COMP FUEL LEVEL PROGRAMMABLE



6310

*Digital*  
ULTRA-LITE VOLTMETER




6593

*Digital*  
COBALT WATER TEMPERATURE



6937



GAUGES	RANGE	SPORT-COMP	ULTRA-LITE	COBALT	INFO
		2 1/16"	2 1/16"	2 1/16"	
BOOST PRESSURE	5-60 PSI	6370*	6570 †	6970	INCLUDES 1/8" NPT SENDER, RECOMMENDED FOR DIESEL ONLY
BOOST/VACUUM	30 IN. HG/30 PSI	6359*	6559 †	6959	INCLUDES MAP SENSOR AND UNIVERSAL T-FITTING, RECOMMENDED FOR GAS ENGINES
EGT/PYROMETER	0°-2000° F	6345*	6545 †	6945	INCLUDES PROBE WITH 1/8" NPT WELD-IN FITTING AND HOSE CLAMP MOUNTING OPTIONS, 10 WIRE
FUEL LEVEL PROGRAMMABLE	0 Ω-280 Ω	6310*	6510 †	6910	7 PRE-SETS FOR MOST COMMON FACTORY SENDERS PLUS UNIVERSAL PROGRAMMABLE MODE
FUEL PRESSURE	5-100 PSI	6363*	6563 †	6963	INCLUDES 1/8" NPT SENDER, 8 WIRE HARNESS
NITROUS PRESSURE	0-1600 PSI	6374*	6574 †	6974	INCLUDES 1/8" NPT SENDER, 8 WIRE HARNESS
OIL PRESSURE	5-100 PSI	6327*	6527 †	6927	INCLUDES 1/8" NPT SENDER AND 1/4" NPT ADAPTER, 8 WIRE HARNESS
OIL TEMPERATURE	0°-340° F	6348*	6548 †	6948	INCLUDES 1/8" NPT SENDER WITH 3/8" NPT AND 1/2" NPT ADAPTERS, 8 WIRE HARNESS
TRANSMISSION TEMPERATURE	0°-340° F	6349*	6549 †	6949	INCLUDES 1/8" NPT SENDER WITH 3/8" NPT AND 1/2" NPT ADAPTERS, 8 WIRE HARNESS
VOLTMETER	8-18 VOLTS	6393*	6593 †	6993	INCLUDES 8 WIRE HARNESS
WATER TEMPERATURE	0°-340° F	6337*	6537 †	6937	INCLUDES 1/8" NPT SENDER WITH 3/8" NPT AND 1/2" NPT ADAPTERS, 8 WIRE HARNESS
FIVE GAUGE KITS (3 3/8" SPEEDO)		6300*	6500 †	6900	INCLUDES SPEEDOMETER, OIL PRESS, WATER TEMP, FUEL LEVEL, VOLTMETER & REQUIRED SENSORS

PEDESTAL MOUNT TACHOMETER		OPERATES ON MOST 2, 3, 4, 5, 6, 8, AND 10 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS	SPORT-COMP	ULTRA-LITE	COBALT
RANGE	DESCRIPTION	INFO	3 3/4"	3 3/4"	3 3/4"
10,000 RPM	PEDESTAL	DIGITAL TACHOMETER WITH EZ VIEW DISPLAY AND AMBER LED SHIFT LIGHT	6399*	6599 †	6999

IN-DASH TACHOMETER		OPERATES ON MOST 2, 3, 4, 5, 6, 8, AND 10 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS	SPORT-COMP	ULTRA-LITE	COBALT
RANGE	DESCRIPTION	INFO	3 3/8"	3 3/8"	3 3/8"
10,000 RPM	IN-DASH	DIGITAL TACHOMETER WITH EZ VIEW DISPLAY AND OUTPUT FOR OPTIONAL AMBER LED SHIFT LIGHT	6397*	6597 †	6997

IN-DASH SPEEDOMETER		PROGRAMMABLE ELEC. WORKS WITH MOST VEHICLE SPEED SENSORS. SENDERS AVAILABLE	SPORT-COMP	ULTRA-LITE	COBALT
RANGE	DESCRIPTION	INFO	3 3/8"	3 3/8"	3 3/8"
260 MPH	IN-DASH	PROGRAMMABLE WITH EZ CAL SYSTEM. MPH OR KM/H. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	6388*	6588 †	6988

IN-DASH SPEEDOMETER/TACH		TACHOMETER OPERATES ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS. SPEEDOMETER OPERATES ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS	SPORT-COMP	ULTRA-LITE	COBALT
RANGE	DESCRIPTION	INFO	3 3/8"	3 3/8"	3 3/8"
260 MPH/10,000 RPM	IN-DASH	COMBINATION INSTRUMENT FEATURING DIGITAL TACH AND PROGRAMMABLE SPEEDO.	6387*	6587 †	6987

\* Matches ES & Z-Series gauges

† Matches Ultra-Lite & Ultra-Lite II gauges

**AMERICAN  
MUSCLE™**

GO TO OUR  
WEBSITE TO SEE  
OUR FULL LINE  
OF HIGH PERFORMANCE  
INSTRUMENTS

HI-DEF™  
LED LIGHTING

Features Through the Dial White LED Lighting with Lighted Pointer  
American Muscle Gauges Come With a Flat Lens  
**KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION**



The fastest growing Series in the Auto Meter line, American Muscle dominates the dashboard with styling ripped straight from Detroit steel and powered by the best in modern internals and technology. With the lights off, these gauges blend perfectly into any interior from the golden age of the Big Three. When night falls, Auto Meter's cutting edge Hi Def LED lighting proves that great form is defined by dedication to function. A spun metal dial and a bright chrome bezel set off a look that could make the perfection in your dash rival what's under the hood.



GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

AMERICAN™ MUSCLE

See Pages 88-89 for the complete gauge series offering

### Kits

**1202 LCD ODOMETER ELECTRIC SPEEDOMETER KIT**

**SPEEDOMETER ELECTRIC PROGRAMMABLE**

FUEL LEVEL (240 Ω EMPTY/33 Ω FULL)    WATER TEMPERATURE    **3 3/8"** MPH    OIL PRESSURE    VOLTMETER

**2 1/16"**

### Speedometers & Tachometers

**IN-DASH SPEEDOMETER/ELECTRIC**    **5"**    **IN-DASH TACHOMETER**    **5"**

**IN-DASH SPEEDOMETER/ELECTRIC**    **3 3/8"**    **IN-DASH TACHOMETER**    **3 3/8"**

1289    1288    1299    1298

### Combos & Instruments

**QUAD GAUGES**    **5"**    **5"**    **Digital Stepper Motor**    **Short Sweep Electric**

240Ω E/33Ω F - 1212    TACH SPEED COMBO    WATER TEMPERATURE    OIL PRESSURE

0 E/90Ω F - 1225    ELECTRIC PROGRAMMABLE

1212    1295    **2 1/16"**    **2 1/16"**

*Prestige* SERIES  
**Black Diamond**

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

HI-DEF™ LED LIGHTING

Features Through the Dial White LED Lighting with Lighted Pointer  
 Prestige Series Gauges Come With a Domed Lens  
**KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION**



Traditionally styled, with metal dial accents and an exclusive white LED lit pointer, Prestige Black Diamond captures the look of the era that defined meticulous, no compromise styling. Instantly take any build upscale with high end craftsmanship coupled with the latest in instrument technology. Form and function are held in perfect balance; a striking design and unmatched night-time visibility paired with race proven accuracy and durability to create the ultimate centerpiece for your dash. Prestige shows the world this definitely isn't your first build.

**Kits**

**2001 ELECTRIC PROGRAMMABLE SPEEDOMETER W LCD ODOMETER KIT**

**SPEEDOMETER ELECTRIC PROGRAMMABLE**







GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

# Prestige SERIES

## Black Diamond

See Pages 88-89 for the complete gauge series offering

### Kits

**2003 WHEEL ODOMETER ELECTRIC SPEEDOMETER KIT**

**SPEEDOMETER ELECTRIC PROGRAMMABLE WITH WHEEL ODOMETER**

FUEL LEVEL (240 Ω EMPTY/33 Ω FULL)      WATER TEMPERATURE      **3 3/8"**      OIL PRESSURE      VOLTMETER

2016      2038      2088      2028      2093

### Speedometers & Tachometers

**IN-DASH SPEEDOMETER/ELECTRIC PROGRAMMABLE WITH WHEEL ODOMETER**      **IN-DASH SPEEDOMETER/ELECTRIC**      **IN-DASH TACHOMETER**

**3 3/8"**      **3 3/8"**      **3 3/8"**

2088      2086      2096

### Combos & Instruments

**QUAD GAUGES**      **TACH SPEEDO COMBO**      **Full Sweep Mechanical**      **Short Sweep Electric**  
 240 Ω E/33 Ω F - 2011      ELECTRIC PROGRAMMABLE      OIL PRESSURE      VOLTMETER  
 0 E/90 Ω F - 2012

**5"**      **5"**      **2 1/16"**      **2 1/16"**

2011      2091      2022      2093

*Prestige* SERIES  
**Antique Ivory**

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

HI-DEF™ LED LIGHTING

Features Full Dial Face LED Lighting  
 Prestige Series Gauges Come With a Domed Lens  
**KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION**



A parchment backdrop yields a spun metal dial with period correct styling, recalling an era of distinct design and unapologetic luxury. LED lighting across the entire face is reminiscent of the warm glow of a tube radio. Stylish, yet functional, visibility is clear and precise under all conditions. Underneath the sophisticated skin lies the soul of a race car, with accuracy and durability designed to stand up to the the most powerful engines in the world. Prestige Antique Ivory's show-stopping good looks are just the beginning of the story.

**Kits**

**2000 ELECTRIC PROGRAMMABLE SPEEDOMETER W LCD ODOMETER KIT**

**SPEEDOMETER ELECTRIC PROGRAMMABLE**



**HI-DEF™  
LED LIGHTING**

**GO TO OUR  
WEBSITE TO SEE  
OUR FULL LINE  
OF HIGH PERFORMANCE  
INSTRUMENTS**

*Prestige* SERIES  
**Antique Ivory**

See Pages 88-89 for the complete gauge series offering

**Kits**

**2002 WHEEL ODOMETER  
ELECTRIC SPEEDOMETER KIT**

**FUEL LEVEL**  
(240 Ω EMPTY/33 Ω FULL)  
2017

**WATER TEMPERATURE**  
2037

**3 3/8"**

**SPEEDOMETER ELECTRIC  
PROGRAMMABLE WITH  
WHEEL ODOMETER**  
2089

**OIL PRESSURE**  
2027

**VOLTMETER**  
2092

**Speedometers & Tachometers**

**IN-DASH SPEEDOMETER/  
ELECTRIC PROGRAMMABLE  
WITH WHEEL ODOMETER**  
2089

**3 3/8"**

**IN-DASH SPEEDOMETER/  
ELECTRIC**  
2087

**3 3/8"**

**IN-DASH TACHOMETER**  
2097

**3 3/8"**

**Combos & Instruments**

**QUAD GAUGES**  
240 Ω E/33 Ω F - 2010  
0 E/90 Ω F - 2009  
2010

**5"**

**TACH SPEEDO COMBO**  
ELECTRIC PROGRAMMABLE  
2090

**5"**

**Full Sweep  
Mechanical**  
WATER TEMPERATURE  
2032

**2 1/16"**

**Short Sweep  
Electric**  
OIL PRESSURE  
2027

**2 1/16"**

73

*Prestige* SERIES  
**Prestige Pearl**

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

HI-DEF™ LED LIGHTING

Features Full Dial Face LED Lighting  
 Prestige Series Gauges Come With a Domed Lens  
**KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION**




Stark white, high contrast, and striking pure white LED illumination define the look of Prestige Pearl. A white dial adds style and class to the dash of any vehicle while retaining excellent readability, no matter the circumstance. Particularly captivating set against detailed metalworking or dark interiors, these instruments transform the look of your cockpit and provide a focal point for anyone lucky enough to get behind the wheel. A bright chrome bezel and curved lens complete the look, while race derived technology behind the scenes ensure the in utmost in performance and reliability.

**Kits**

**2006 ELECTRIC PROGRAMMABLE SPEEDOMETER W LCD ODOMETER KIT**

**SPEEDOMETER ELECTRIC PROGRAMMABLE**

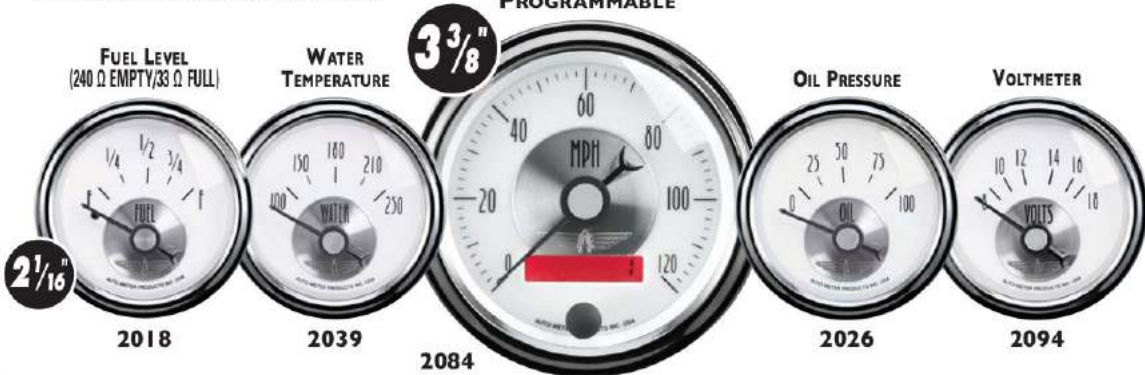

**HI-DEF™  
LED LIGHTING**

**GO TO OUR  
WEBSITE TO SEE  
OUR FULL LINE  
OF HIGH PERFORMANCE  
INSTRUMENTS**

*Prestige* SERIES  
**Prestige Pearl**

See Pages 88-89 for the complete gauge series offering

**Kits**

**2007 WHEEL ODOMETER  
ELECTRIC SPEEDOMETER KIT**

**FUEL LEVEL**  
(240 Ω EMPTY/33 Ω FULL)

**WATER TEMPERATURE**

**3 3/8"**

**2018**      **2039**      **2085**      **2026**      **2094**

**2 1/16"**

**OIL PRESSURE**      **VOLTMETER**

**Speedometers & Tachometers**

**IN-DASH SPEEDOMETER/  
ELECTRIC PROGRAMMABLE  
WITH WHEEL ODOMETER**

**3 3/8"**

**2085**

**IN-DASH SPEEDOMETER/  
ELECTRIC**

**3 3/8"**

**2084**

**IN-DASH TACHOMETER**

**3 3/8"**

**2098**

**Combos & Instruments**

**QUAD GAUGES**  
240Ω E/33Ω F - 2019

**5"**

**2019**

**TACH SPEEDO COMBO**  
ELECTRIC PROGRAMMABLE

**5"**

**2095**

**Full Sweep Mechanical**  
**WATER TEMPERATURE**

**2 1/16"**

**2031**

**Short Sweep Electric**  
**VOLTMETER**

**2 1/16"**

**2094**

**ILLUMINATED**      **ILLUMINATED**

# Cruiser

GO TO OUR  
WEBSITE TO SEE  
OUR FULL LINE  
OF HIGH PERFORMANCE  
INSTRUMENTS

HI-DEF™  
LED LIGHTING

Features Through the Dial White LED Lighting with Lighted Pointer  
Cruiser Gauges Come With a Flat Lens  
**KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION**



A sophisticated pairing of beige & black highlighted by subtle aluminum accents & chrome bezels, Cruiser echoes vintage style while providing modern accommodations for function. A unique hybrid dial design featuring through-the-dial LED illumination & high contrast orange lit pointers ensures unrivaled visibility day or night. Built to the same specs as Auto Meter's racing instruments, these gauges are durable companions no matter how long the cruise.



GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

# Cruiser

See Pages 88-89 for the complete gauge series offering

## Kits

**1101 LCD ODOMETER  
ELECTRIC SPEEDOMETER KIT**

**FUEL LEVEL (240 Ω EMPTY/33 Ω FULL)**

**WATER TEMPERATURE**

**3 3/8"**

**SPEEDOMETER  
ELECTRIC  
PROGRAMMABLE**

**OIL PRESSURE**

**VOLTMETER**

**2 1/16"**

1117      1138      1186      1128      1193

## Speedometers & Tachometers

**IN-DASH SPEEDOMETER/  
ELECTRIC**

**3 3/8"**

**ILLUMINATED**

1186

**IN-DASH TACHOMETER**

**3 3/8"**

**ILLUMINATED**

1196

## Instruments

**Digital Stepper  
Motor**

**OIL PRESSURE**

**WATER TEMPERATURE**

**2 1/16"**

1153      1155

**Short Sweep  
Electric**

**FUEL LEVEL (0 Ω EMPTY/90 Ω FULL)**

**VOLTMETER**

**2 1/16"**

1113      1193

# Cruiser AD

GO TO OUR  
WEBSITE TO SEE  
OUR FULL LINE  
OF HIGH PERFORMANCE  
INSTRUMENTS

HI-DEF™  
LED LIGHTING

Features Through the Dial White LED Lighting with Lighted Pointer  
Cruiser AD Gauges Come With a Domed Lens

**KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION**



Peerless in design, Cruiser AD's striking Art Deco inspired aesthetics add elegance and refinement to any interior. Vivid white LED backlighting and a white lit pointer make them as easy to read as they are to look at. Crowned by a scalloped chrome bezel and domed lens, this evocative reinterpretation of the original looks period correct while providing award winning levels of accuracy and reliability.





GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

# Cruiser AD

See Pages 88-89 for the complete gauge series offering

## Kits

**1100 LCD ODOMETER  
ELECTRIC SPEEDOMETER KIT**

**FUEL LEVEL**  
(240 Ω EMPTY/33 Ω FULL)

**WATER TEMPERATURE**

**3 3/8"**

**SPEEDOMETER  
ELECTRIC  
PROGRAMMABLE**

**OIL PRESSURE**

**VOLTMETER**

**2 1/16"**

1107      1136      1187      1126      1191

## Speedometers & Tachometers

**IN-DASH SPEEDOMETER/  
ELECTRIC**

**3 3/8"**

**ILLUMINATED**

1187

**IN-DASH TACHOMETER**

**3 3/8"**

**ILLUMINATED**

1195

## Instruments

**Digital Stepper  
Motor**

**OIL PRESSURE**

**WATER TEMPERATURE**

**2 1/16"**

1152      1154

**Short Sweep  
Electric**

**FUEL LEVEL**  
(0 Ω EMPTY/90 Ω FULL)

**VOLTMETER**

**2 1/16"**

1104      1191

# Designer Black II™

Features Through the Dial White LED Lighting with Lighted Pointer Designer Black II Gauges Come with a Domed Lens

See Pages 88-89 for the complete gauge series offering

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

HI-DEF™ LED LIGHTING

KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION

## Kits

**1201 ELECTRIC PROGRAMMABLE SPEEDOMETER W LCD ODOMETER KIT**

**SPEEDOMETER ELECTRIC PROGRAMMABLE**

FUEL LEVEL  
(240 Ω EMPTY/33 Ω FULL)

1206

WATER TEMPERATURE

1238

3 3/8"

1286

OIL PRESSURE

1228

VOLTMETER

1293

## Instruments

**QUAD GAUGES**  
240Ω E/33Ω F - 1211  
0 E/90Ω F - 1224

1211

**TACH SPEED COMBO**  
ELECTRIC PROGRAMMABLE

1291

**IN-DASH TACHOMETER/ ELECTRIC**

1296





GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

# Old Tyme White II™

Features White LED Full Dial Lighting  
Old Tyme White II Gauges Come With a  
Domed Lens

See Pages 88-89 for the complete gauge series offering

**KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION**

## Kits

**1200 ELECTRIC PROGRAMMABLE SPEEDOMETER W LCD ODOMETER KIT**

**SPEEDOMETER ELECTRIC PROGRAMMABLE**

**FUEL LEVEL** (240 Ω EMPTY/33 Ω FULL)  
E FUEL F  
1/4 1/2 3/4  
Auto Meter  
1216

**WATER TEMPERATURE**  
150 180 210  
100 WATER 250  
Auto Meter  
1237

**3 3/8"**  
40 50 60 70 80  
20 100  
0 120  
MPH  
Auto Meter  
1287

**OIL PRESSURE**  
25 50 75 100  
OIL PRESSURE  
Auto Meter  
1227

**VOLTMETER**  
10 12 14 16  
8 VOLTS 18  
Auto Meter  
1292

**2 1/16"**

## Instruments

**QUAD GAUGES**  
240 Ω E/33 Ω F-1210  
0 E/90 Ω F- 1213

**5"**

**TACH SPEED COMBO**  
ELECTRIC PROGRAMMABLE

**5"**

**IN-DASH TACHOMETER**

**3 3/8"**

**1210**

**1290**

**1297**



# Arctic White™

Arctic White Gauges Come With a  
Domed Lens

See Pages 90-91 for the complete gauge series offering



**KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION**

## Kits

<b>1302 ELECTRIC PROGRAMMABLE SPEEDOMETER W LCD ODOMETER KIT</b>		<b>SPEEDOMETER ELECTRIC PROGRAMMABLE</b>		
<b>FUEL LEVEL</b> (240 Ω EMPTY/33 Ω FULL)	<b>WATER TEMPERATURE</b>	<b>3 1/8"</b>	<b>OIL PRESSURE</b>	<b>VOLTMETER</b>
<b>2 1/16"</b>				
<b>1317</b>	<b>1337</b>	<b>1388</b>	<b>1327</b>	<b>1391</b>

## Speedometers & Tachometers

<b>IN-DASH GPS SPEEDOMETER/ ELECTRIC</b>	<b>TACH SPEEDO COMBO ELECTRIC PROGRAMMABLE</b>	<b>IN-DASH TACHOMETER</b>
<b>3 3/8"</b>	<b>3 3/8"</b>	<b>3 3/8"</b>
<b>1349</b>	<b>1381</b>	<b>1390</b>

## Instruments

<b>QUAD GAUGE</b> FUEL 240Ω E/33Ω F	<b>WATER TEMPERATURE</b> 100°-250°	<b>Full Sweep Mechanical</b> OIL PRESSURE	<b>Short Sweep Electric</b> FUEL LEVEL (0 Ω EMPTY/90 Ω FULL)
<b>3 3/8"</b>	<b>3 3/8"</b>	<b>2 1/16"</b>	<b>2 1/16"</b>
<b>1312</b>	<b>1330</b>	<b>1321</b>	<b>1315</b>

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

# Designer Black™

Designer Black Gauges Come With a Domed Lens

See Pages 90-91 for the complete gauge series offering

**KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION**

## Kits

<b>1421 ELECTRIC PROGRAMMABLE SPEEDOMETER W LCD ODOMETER KIT</b>		<b>SPEEDOMETER ELECTRIC PROGRAMMABLE</b>		
<b>FUEL LEVEL</b> (240 Ω EMPTY/33 Ω FULL)	<b>WATER TEMPERATURE</b>		<b>OIL PRESSURE</b>	<b>VOLTMETER</b>
1424	1436	1487	1426	1483

## Speedometers & Tachometers

<b>IN-DASH SPEEDOMETER/ ELECTRIC W WHEEL ODOMETER</b>	<b>TACH SPEEDO COMBO ELECTRIC PROGRAMMABLE</b>	<b>IN-DASH TACHOMETER</b>
1479	1481	1490

## Instruments

<b>QUAD GAUGE</b> FUEL 240Ω E/33Ω F	<b>WATER TEMPERATURE</b> 100°-250° VOLTMETER 8-18	<b>Full Sweep Mechanical</b> OIL PRESSURE	<b>Short Sweep Electric</b> WATER TEMPERATURE
1412	1430	1429	1436

# ANTIQUE BEIGE™






Antique Beige Gauges Come With a  
Domed Lens

See Pages 90-91 for the complete gauge series offering

GO TO OUR  
WEBSITE TO SEE  
OUR FULL LINE  
OF HIGH PERFORMANCE  
INSTRUMENTS

**KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION**









## Kits

<b>1809 ELECTRIC PROGRAMMABLE SPEEDOMETER W LCD ODOMETER KIT</b>		<b>SPEEDOMETER ELECTRIC PROGRAMMABLE</b>		
<b>FUEL LEVEL</b> (240 Ω EMPTY/33 Ω FULL)	<b>WATER TEMPERATURE</b>		<b>OIL PRESSURE</b>	<b>VOLTMETER</b>
				
<b>2 1/16"</b> 1817	1837	1887	1827	1891

## Speedometers & Tachometers

<b>IN-DASH SPEEDOMETER/ ELECTRIC W WHEEL ODOMETER</b>	<b>TACH SPEEDO COMBO ELECTRIC PROGRAMMABLE</b>	<b>IN-DASH TACHOMETER</b>
 	 	 
1879	1881	1890

## Instruments

<b>QUAD GAUGE</b> FUEL 240Ω E/33Ω F	<b>WATER TEMPERATURE</b> 100°-250° VOLTMETER 8-18	<b>Full Sweep Mechanical</b> OIL PRESSURE	<b>Short Sweep Electric</b> WATER TEMPERATURE
 	 	 	 
1812 84	1830	1821	1837

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

# Old Tyme White™

Old Tyme White Gauges Come With a Domed Lens

See Pages 90-91 for the complete gauge series offering

**KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION**

## Kits

<b>1602 ELECTRIC PROGRAMMABLE SPEEDOMETER W LCD ODOMETER KIT</b>		<b>SPEEDOMETER ELECTRIC PROGRAMMABLE</b>		
<b>FUEL LEVEL</b> (240 Ω EMPTY/33 Ω FULL)	<b>WATER TEMPERATURE</b>	<b>3 1/8"</b>	<b>OIL PRESSURE</b>	<b>VOLTMETER</b>
<b>1606</b>	<b>1638</b>		<b>1628</b>	<b>1692</b>

## Speedometers & Tachometers

<b>IN-DASH SPEEDOMETER/ ELECTRIC W WHEEL ODOMETER</b>	<b>TACH SPEEDO COMBO ELECTRIC PROGRAMMABLE</b>	<b>IN-DASH TACHOMETER</b>
<b>1679</b>	<b>1681</b>	<b>1690</b>

## Instruments

<b>QUAD GAUGE</b> FUEL 240Ω E/33Ω F	<b>WATER TEMPERATURE</b> 100°-250° <b>VOLTMETER</b> 8-18	<b>Full Sweep Mechanical</b> <b>OIL PRESSURE</b>	<b>Short Sweep Electric</b> <b>FUEL LEVEL</b> (0 Ω EMPTY/90 Ω FULL)
<b>1612</b>	<b>1630</b>	<b>1621</b>	<b>1604</b>

# Old Tyme Black™

Old Tyme Black Gauges Come With a Domed Lens

See Pages 90-91 for the complete gauge series offering



**KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION**

## Kits

**1709 ELECTRIC PROGRAMMABLE SPEEDOMETER W LCD ODOMETER KIT**

FUEL LEVEL (240 Ω EMPTY/33 Ω FULL)

2 1/16"

1717

**WATER TEMPERATURE**

1737

**SPEEDOMETER ELECTRIC PROGRAMMABLE**

3 1/8"

1787

**OIL PRESSURE**

1727

**VOLTMETER**

1791

**1708 MECHANICAL SPEEDOMETER KIT**

FUEL LEVEL (240 Ω EMPTY/33 Ω FULL)

2 1/16"

1717

**WATER TEMPERATURE**

1737

**SPEEDOMETER MECHANICAL**

3 1/8"

1796

**OIL PRESSURE**

1727

**VOLTMETER**

1791

# GOLDEN OLDIES™

## Kits

**1502 ELECTRIC PROGRAMMABLE SPEEDOMETER W LCD ODOMETER KIT**

FUEL LEVEL (240 Ω EMPTY/33 Ω FULL)

2 1/16"

1506

**WATER TEMPERATURE**

1538

**SPEEDOMETER ELECTRIC PROGRAMMABLE**

3 1/8"

1588

**OIL PRESSURE**

1528

**VOLTMETER**

1592

Golden Oldies Gauges Come With a Domed Lens



GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

**GOLDEN OLDIES™**

Golden Oldies Gauges Come With a Domed Lens

See Pages 90-91 for the complete gauge series offering

**KITS INCLUDE ALL NECESSARY SENDERS FOR TYPICAL INSTALLATION**

**Kits**

**1501 MECHANICAL SPEEDOMETER KIT**

**SPEEDOMETER ELECTRIC PROGRAMMABLE**

**2 1/16"**

**3 1/8"**

**FUEL LEVEL (240 Ω EMPTY/33 Ω FULL)**

**WATER TEMPERATURE**

**OIL PRESSURE**

**VOLTMETER**

**1506**      **1538**      **1593**      **1528**      **1592**

*American*  
**PLATINUM™**

**Kits**

**1902 ELECTRIC PROGRAMMABLE SPEEDOMETER W LCD ODOMETER KIT**

**SPEEDOMETER ELECTRIC PROGRAMMABLE**

American Platinum Gauges Come With a Domed Lens

**2 1/16"**

**3 1/8"**

**FUEL LEVEL (240 Ω EMPTY/33 Ω FULL)**

**WATER TEMPERATURE**

**OIL PRESSURE**

**VOLTMETER**

**1906**      **1938**      **1988**      **1928**      **1992**

**1901 MECHANICAL SPEEDOMETER KIT**

**SPEEDOMETER MECHANICAL**

**2 1/16"**

**3 1/8"**

**FUEL LEVEL (240 Ω EMPTY/33 Ω FULL)**

**WATER TEMPERATURE**

**OIL PRESSURE**

**VOLTMETER**

**1906**      **1938**      **1993**      **1928**      **1992**

# Street Rod & Muscle Car

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS



KITS									* INCLUDES ALL SENSORS	
	AMERICAN MUSCLE	CRUISER	CRUISER AD	PRESTIGE BLACK DIAMOND	PRESTIGE ANTIQUE VORY	PRESTIGE PEARL	OLD TIME WHITE II	DESIGNER BLACK II	INFO	
<b>3 3/8" 5 PIECE KIT</b> 120 MPH ELECTRIC SPEEDOMETER (LCD ODOMETER) OIL PRESSURE, WATER TEMPERATURE, VOLTMETER, AND FUEL LEVEL	1202	1101	1100	2001	2000	2006	1200	1201	INCLUDES 3 3/8" ELECTRIC PROGRAMMABLE SPEEDOMETER WITH LCD ODOMETER, 2 1/16" 100°-250° F WATER TEMP, 0-100 PSI OIL PRESS, 240 Ω E - 33 Ω FUEL LEVEL, AND 8-16 VOLTMETER. *	
<b>3 3/8" 5 PIECE KIT</b> 120 MPH ELECTRIC SPEEDOMETER (WHEEL ODOMETER) OIL PRESSURE, WATER TEMPERATURE, VOLTMETER, AND FUEL LEVEL	—	—	—	2003	2002	2007	—	—	INCLUDES 3 3/8" ELECTRIC PROGRAMMABLE SPEEDOMETER WITH LCD ODOMETER, 2 1/16" 100°-250° F WATER TEMP, 0-100 PSI OIL PRESS, 240 Ω E - 33 Ω FUEL LEVEL, AND 8-16 VOLTMETER. *	
<b>5" QUAD GAUGE &amp; TACH SPEEDO COMBO</b> QUAD GAUGE: 0-100 PSI OIL PRESSURE 100°-250° F WATER TEMPERATURE 8-18 VOLTMETER, 240 Ω E - 33 Ω F FUEL LEVEL TACH SPEEDO COMBO: 0-120 SPEEDOMETER 0-8,000 RPM TACHOMETER	1205	—	—	2005	2004	2008	1203	1204	INCLUDES QUAD GAUGE: 0-100 PSI OIL PRESSURE 100°-250° F WATER TEMPERATURE, 8-18 VOLTMETER, 240 Ω E - 33 Ω F FUEL LEVEL TACH SPEEDO COMBO: 0-120 SPEEDOMETER, 0-8,000 RPM TACHOMETER. *	
<b>2 1/16" SHORT SWEEP ELECTRIC</b>									INFO	
FUEL LEVEL (0 Ω EMPTY/90 Ω FULL)	1214	1113	1104	2014	2013	2015	—	—	WORKS WITH MOST 1965 TO 1997 CHEVY/GM SENDERS	
FUEL LEVEL (16 Ω EMPTY/158 Ω FULL)	1218	—	—	—	—	—	—	—	WORKS WITH MOST 1989 ('87 MUSTANG) AND LATER FORD	
FUEL LEVEL (73 Ω EMPTY/10 Ω FULL)	1215	1115	1105	—	—	—	—	—	WORKS WITH MOST PRE 1989 (PRE '87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER, SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.	
FUEL LEVEL (240 Ω EMPTY/33 Ω FULL)	1217	1117	1107	2016	2017	2018	1216	1206	WORKS WITH 240-33 OHMS SENDERS, INCLUDING AUTO METER 3262	
OIL PRESSURE 0-100 PSI	1226	1128	1126	2028	2027	2026	1227	1228	OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTING.	
OIL TEMPERATURE 140°-300° F	1248	—	—	—	—	—	—	—		
TRANS TEMPERATURE 100°-250° F	1249	—	—	—	—	—	—	—		
VOLTMETER 8-18 VOLTS	1294	1193	1191	2093	2092	2094	1292	1293		
WATER TEMPERATURE 100°-250° F	1236	1138	1136	2038	2037	2039	1237	1238	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.	
<b>2 1/16" DIGITAL STEPPER MOTOR</b>									INFO	
CLOCK-ANALOG	1284	1185	1184	—	—	—	—	1285	12 HOUR, DIGITAL STEPPER MOTOR MOVEMENT	
BOOST/VACUUM 30 IN HG./15 PSI	1258	—	—	—	—	—	—	—	INCLUDES MAP SENSOR, UNIVERSAL T-FITTING AND 8' WIRING HARNESS	
BOOST/VACUUM 30 IN HG./30 PSI	1259	—	—	—	—	—	—	—	INCLUDES MAP SENSOR, UNIVERSAL T-FITTING AND 8' WIRING HARNESS	
FUEL LEVEL PROGRAMMABLE (0 Ω 200 Ω)	1209	1109	1108	—	—	—	—	—	7 SENSOR PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING	
OIL PRESSURE 0-100 PSI	1253	1153	1152	—	—	—	—	—	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS.	
OIL TEMPERATURE 140°-280° F	1256	—	—	—	—	—	—	—	INCLUDES 8' WIRING HARNESS	
TRANS TEMPERATURE 100°-260° F	1257	—	—	—	—	—	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS	
VOLTMETER 8-18 VOLTS	1282	1183	1182	—	—	—	—	—		
WATER TEMPERATURE 100°-260° F	1255	1155	1154	—	—	—	—	—		
<b>2 1/16" FULL SWEEP MECHANICAL</b>									INFO	
OIL PRESSURE 0-100 PSI	1219	—	—	2022	2021	2023	—	—	INCLUDE 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS.	
WATER TEMPERATURE 120°-240° F	1232	—	—	2033	2032	2031	—	—	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.	



GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

# Street Rod & Muscle Car

HI-DEF™ LED LIGHTING

KITS		AMERICAN MUSCLE	CRUISER	CRUISER AD	PRESTIGE BLACK DIAMOND	PRESTIGE ANTIQUE IVORY	PRESTIGE PEARL	OLD TIME WHITE II	DESIGNER BLACK II	INFO
<b>SPEEDOMETER ELECTRIC (PROGRAMMABLE)</b>		—	1186	1187	2086	2087	2084	1287	1286	PROGRAMMABLE SPEEDOMETERS WORK OFF MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5288.
3 3/8" IN-DASH (LCD ODOMETER)	0-120 MPH	—	—	—	—	—	—	—	—	
3 3/8" IN-DASH (LCD ODOMETER)	0-160 MPH	1288	—	—	—	—	—	—	—	
3 3/8" IN-DASH (LCD ODOMETER)	0-250 KMH	1288-M	—	—	—	—	—	—	—	
3 3/8" IN-DASH (WHEEL ODOMETER)	0-120 MPH	—	—	—	2088	2089	2085	—	—	
5" IN-DASH (LCD ODOMETER)	0-160 MPH	1289	—	—	—	—	—	—	—	
<b>TACHOMETER</b>		OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS								INFO
3 3/8" IN-DASH	0-8,000 RPM	1298	1196	1195	2096	2097	2098	1297	1296	FOR IN-DASH MOUNTING INTO A 3 3/8" DIAMETER HOLE
5" IN-DASH	0-8,000 RPM	1299	—	—	—	—	—	—	—	FOR IN-DASH MOUNTING INTO A 4 5/8" DIAMETER HOLE
<b>TACH SPEEDO COMBO (REQUIRES A SPEED SENSOR)</b>		OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS								INFO
5"	0-120 SPEEDOMETER 0-8,000 RPM TACHOMETER	1295	—	—	2091	2090	2095	1290	1291	FOR IN-DASH MOUNTING INTO A 4 5/8" DIAMETER HOLE
<b>QUAD GAUGE</b>										INFO
5" 240 E - 33 Ω	0-100 PSI OIL PRESSURE 100°-250° F WATER TEMPERATURE 8-18 VOLTMETER 240 Ω E - 33 Ω F FUEL LEVEL	1212	—	—	2011	2010	2019	1210	1211	INCLUDES 1/8" NPT PRESSURE & 1/8" NPT TEMPERATURE SENSOR (MODEL 3262 FUEL LEVEL SENSOR NOT INCLUDED)
5" 0 E - 90 Ω	0-100 PSI OIL PRESSURE 100°-250° F WATER TEMPERATURE 8-18 VOLTMETER 0 Ω E - 90 Ω F FUEL LEVEL	1225	—	—	2012	2009	2020	1213	1224	INCLUDES 1/8" NPT PRESSURE & 1/8" NPT TEMPERATURE SENSOR (REQUIRES GM-STYLE 0-90Ω FUEL LEVEL SENSOR NOT INCLUDED)



# Street Rod & Muscle Car



## PERIMETER LIGHTING

KITS	ARCTIC WHITE	DESIGNER BLACK	ANTIQUE BEIGE	OLD TIME WHITE	OLD TIME BLACK	GOLDEN OLDIES	AMERICAN PLATINUM	INFO
<b>3 1/8" 5 PIECE ELECTRIC SPEEDO KIT</b> 120 MPH PROGRAMMABLE SPEEDOMETER (LCD ODOMETER)	1302	1421	1809	1602	1709	1502	1902	INCLUDES 3 1/8" ELECTRIC PROGRAMMABLE SPEEDOMETER WITH LCD ODOMETER, 2 1/16" 100°-250° F WATER TEMP, 0-100 PSI OIL PRESS, 240 Ω E - 33 Ω FUEL LEVEL, AND 8-18 VOLTMETER. *
<b>3 1/8" 5 PIECE ELECTRIC SPEEDO KPH KIT</b> 190 KPH PROGRAMMABLE SPEEDOMETER (LCD ODOMETER)	1302-M	1421-M	1809-M	1602-M	—	—	—	INCLUDES 3 1/8" ELECTRIC PROGRAMMABLE SPEEDOMETER WITH LCD ODOMETER, 2 1/16" 100°-250° F WATER TEMP, 0-100 PSI OIL PRESS, 240 Ω E - 33 Ω FUEL LEVEL, AND 8-18 VOLTMETER. *
<b>3 1/8" 5 PIECE MECHANICAL SPEEDO KIT</b> 120 MPH MECHANICAL SPEEDOMETER (WHEEL ODOMETER)	1300	1420	1808	1601	1708	1501	1901	INCLUDES 3 1/8" MECHANICAL SPEEDOMETER WITH WHEEL ODOMETER, 2 1/16" 100°-250° F WATER TEMP, 0-100 PSI OIL PRESS, 240 Ω E - 33 Ω FUEL LEVEL, AND 8-18 VOLTMETER. *
<b>3 1/8" 5 PIECE TRADITIONAL KIT</b> 120 MPH MECHANICAL SPEEDOMETER (WHEEL ODOMETER)	1311	1411	1811	1611	—	—	—	INCLUDES 3 1/8" MECHANICAL SPEEDOMETER WITH WHEEL ODOMETER, 2 1/16" FULL SWEEP MECHANICAL 120°-240° F WATER TEMP, FULL SWEEP MECHANICAL 0-100 PSI OIL PRESS, 240 Ω E - 33 Ω FUEL LEVEL, AND 8-18 VOLT METER. *
<b>3 3/8" 5 PIECE ELECTRIC SPEEDO KIT</b> 120 MPH PROGRAMMABLE SPEEDOMETER (WHEEL ODOMETER)	1340	1440	1840	1640	1740	—	—	INCLUDES 3 3/8" PROGRAMMABLE SPEEDOMETER WITH WHEEL ODOMETER, 2 1/16" FULL SWEEP 100°-250° F WATER TEMP, FULL SWEEP 0-100 PSI OIL PRESS, 240 Ω E - 33 Ω FUEL LEVEL, AND 8-18 VOLT METER. *
<b>3 3/8" 5 PIECE ELECTRIC GPS SPEEDO KIT</b> 120 MPH GPS PROGRAMMABLE SPEEDOMETER (LED ODOMETER)	1350	1450	1850	1650	1750	—	—	INCLUDES 3 3/8" GPS SPEEDOMETER WITH LED ODOMETER, 2 1/16" 100°-250° F WATER TEMP, 0-100 PSI OIL PRESS, 240 Ω E - 33 Ω FUEL LEVEL, AND 8-18 VOLT METER. * †
<b>3 3/8" QUAD GAUGE &amp; TACH/SPEEDO COMBO KIT</b>	1309	1409	1820	1620	1720	—	—	INCLUDES QUAD GAUGE 0-100 PSI OIL PRESSURE, 100°-250° F WATER TEMPERATURE, 8-18 VOLTMETER, 240 Ω E - 33 Ω F FUEL LEVEL. * TACH: 0-8,000 SPEED: 0-120 PROGRAMMABLE SPEEDO.
<b>3 3/8" QUAD GAUGE &amp; SPEEDO KIT</b>	—	—	—	—	1700	—	—	INCLUDES QUAD GAUGE 0-100 PSI OIL PRESSURE, 100°-250° F WATER TEMPERATURE, 8-18 VOLTMETER, 240 Ω E - 33 Ω F FUEL LEVEL. * SPEED: 0-120 PROGRAMMABLE SPEEDO.
<b>5" QUAD GAUGE &amp; SPEEDO KIT</b>	1303	1403	1803	1603	1703	—	—	INCLUDES QUAD GAUGE 0-100 PSI OIL PRESSURE, 100°-250° F WATER TEMPERATURE, 8-18 VOLTMETER, 240 Ω E - 33 Ω F FUEL LEVEL. * SPEED: 0-120 PROGRAMMABLE SPEEDO.

## \* INCLUDES ALL SENSORS

† Includes 10Hz antenna. Displays time/date, odometer trip, coordinates, heading, compass, and peak speed recall.

## GAUGES

2 1/16" SHORT SWEEP ELECTRIC								INFO
FUEL LEVEL (0 Ω EMPTY/30 Ω FULL)	1318	1425	1818	1607	1718	1507	1907	WORKS WITH MOST PRE-1985 CHEVY/GM SENDERS
FUEL LEVEL (0 Ω EMPTY/90 Ω FULL)	1315	1422	1815	1604	1715	1504	1904	WORKS WITH MOST 1985 TO 1995 CHEVY/GM SENDERS
FUEL LEVEL (73 Ω EMPTY/10 Ω FULL)	1316	1423	1816	1605	1716	1505	1905	WORKS WITH MOST PRE-1985 (PRE-'87 MUSTANG) FORD AND MOST CHRYSLER
FUEL LEVEL (240 Ω EMPTY/33 Ω FULL)	1317	1424	1817	1606	1717	1506	1906	WORKS WITH MOST PRE-1985 (PRE-'87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER, SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
OIL PRESSURE 0-100 PSI	1327	1426	1827	1628	1727	1528	1928	OIL PRESSURE GAUGES INCLUDE 1/8" NPT SENDER AND 1/4" NPT FITTING.
PRNDL+ GEAR SHIFT INDICATOR GAUGE	1360	1460	1860	—	—	—	—	INCLUDES UNIVERSAL SENDER - FOR AUTOMATIC TRANSMISSION ONLY.
VOLTMETER 8-18 VOLTS	1391	1483	1891	1692	1791	1592	1992	
WATER TEMPERATURE 100°-250° F	1337	1436	1837	1638	1737	1538	1938	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
2 1/16" ANALOG								INFO
CLOCK	1385	1484	1885	1686	1785	1586	1986	QUARTZ MOVEMENT WITH SECOND HAND
2 1/16" FULL SWEEP MECHANICAL								INFO
BOOST/VACUUM 30 IN HG/20 PSI	1372	1471	—	—	—	—	—	INCLUDES 10' NYLON TUBING, AND UNIVERSAL T-FITTING
OIL PRESSURE 0-100 PSI	1321	1429	1821	1621	1721	—	—	INCLUDE 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS.
WATER TEMPERATURE 120°-240° F	1332	1432	1832	1632	1733	—	—	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.



GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

# Street Rod & Muscle Car

## PERIMETER LIGHTING

	ARCTIC WHITE	DESIGNER BLACK	ANTIQUE BEIGE	OLD TIME WHITE	OLD TIME BLACK	GOLDEN OLDIES	AMERICAN PLATINUM	INFO
<b>3 3/8" DUAL GAUGES</b>								
FUEL LEVEL 240 Ω EMPTY/33 Ω FULL	1313	1413	1813	1613	—	—	—	WORKS WITH 240/33 OHM FUEL SENDER (NOT INCLUDED). INCLUDES 1/8" NPT OIL PRESSURE SENDER.
OIL PRESSURE 0-100 PSI								
FUEL LEVEL 0 Ω EMPTY/90 Ω FULL	1324	1434	1824	1624	—	—	—	WORKS WITH 0/90 OHM GM FUEL SENDER (NOT INCLUDED). INCLUDES 1/8" NPT OIL PRESSURE SENDER.
OIL PRESSURE 0-100 PSI								
WATER TEMPERATURE 100°-250° F	1330	1430	1830	1630	—	—	—	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
VOLTMETER 8-18 VOLTS								
<b>SPEEDOMETER ELECTRIC (PROGRAMMABLE)</b>								
<b>INFO</b>								
3 1/8" IN-DASH (LCD ODOMETER) 0-120 MPH	1388	1487	1887	1688	1787	1588	1988	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5288. DIGITAL ODOMETER MODELS INCLUDE TWO TRIP METERS.
3 1/8" IN-DASH (LCD ODOMETER) 0-190 KPH	1388-M	1487-M	1887-M	1688-M	—	—	—	
3 3/8" IN-DASH (LCD ODOMETER) 0-120 MPH	1380	1480	1880	1680	1780	—	—	
3 3/8" IN-DASH (WHEEL ODOMETER) 0-120	1379	1479	1879	1679	1779	—	—	
3 3/8" IN-DASH (GPS)	1349	1449	1849	1649	1749	—	—	GPS SPEEDOMETER INCLUDES 1W/2 ANTENNA, DISPLAYS TIME (DATE), ODOMETER TRIP, COORDINATES, HEADING, COMPASS, AND PEAK SPEED RECALL.
5" IN-DASH (LCD ODOMETER) 0-160 MPH	1389	1489	1889	1689	1789	—	—	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5288. DIGITAL ODOMETER MODELS INCLUDE TWO TRIP METERS.
<b>SPEEDOMETER MECHANICAL</b>								
<b>INFO</b>								
3 1/8" IN-DASH (WHEEL ODOMETER) 0-120	1396	1476	1896	1693	1796	1593	1993	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.
<b>TACHOMETER</b>								
<b>INFO</b>								
OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS								
2 1/16" IN-DASH 0-7,000 RPM	1397	1477	1897	1694	1797	1594	1994	FOR IN-DASH MOUNTING
3 1/8" IN-DASH 0-7,000 RPM	1398	1478	1898	1695	1798	1595	1995	FOR IN-DASH MOUNTING
3 3/8" IN-DASH 0-8,000 RPM	1390	1490	1890	1690	1790	—	—	FOR IN-DASH MOUNTING INTO A 3 3/8" DIAMETER HOLE
5" IN-DASH 0-8,000 RPM	1399	1499	1899	1699	1799	—	—	FOR IN-DASH MOUNTING INTO A 4 5/8" DIAMETER HOLE
<b>TACH SPEEDO COMBO</b>								
<b>INFO</b>								
OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS								
3 3/8" 0-120 SPEEDOMETER 0-8,000 RPM TACHOMETER	1381	1481	1881	1681	1781	—	—	PROGRAMMABLE SPEEDOMETERS WORK OFF MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5288. INCLUDES 3 3/8".
<b>QUAD GAUGE</b>								
<b>INFO</b>								
3 3/8" QUAD GAUGE 240 E - 33 F	1312	1412	1812	1612	1713	—	—	QUAD GAUGE 0-100 PSI OIL PRESSURE 100°-250° F WATER TEMPERATURE, 8-18 VOLTMETER, 0 Ω E - 90 Ω F & 240 Ω E - 33 Ω F FUEL LEVEL. INCLUDES OIL AND WATER SENSORS. (FUEL LEVEL SENSOR NOT INCLUDED)
3 3/8" QUAD GAUGE 0 E - 90 F	1314	1414	1814	1614	1714	—	—	
5" QUAD GAUGE 240 E - 33 F	1310	1410	1810	1610	1710	—	—	
5" QUAD GAUGE 0 E - 90 F	1319	1419	1819	1619	1719	—	—	



# PRO-COMP PRO DASH DISPLAYS

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS



**DIMENSIONS** 3.82" HEIGHT 7.48" WIDTH DEPTH \* Glass (front) to case back - 1.5" \* Glass to back of connector - 2.125" \* Glass to back of harness elbow - 4.5"

## INCLUDES

PROFESSIONAL MOTORSPORTS WIRE HARNESS



PRECISION TWIN TERMINAL 300 F° TEMPERATURE SENSOR (x2)



PRECISION SOLID STATE 150 PSI PRESSURE SENSOR




**ACCESSORY (SOLD SEPARATELY)**  
EXTERNAL LED SHIFT LIGHT



	STREET	RACE
RPM	✓	✓
SPEED	✓	✓
OIL PRESS	✓	✓
OIL TEMP	✓	✓
WATER TEMP	✓	✓
VOLTAGE	✓	✓
FUEL LEVEL PROGRAMMABLE	✓	—
FUEL PRESS	OPTIONAL	SENSOR INCLUDED
INTERIOR SHIFT LIGHT	—	✓
INTERIOR WARN LIGHT W/ MESSAGE DISPLAY	✓	✓
EXTERNAL WARNING LIGHT CAPABLE	✓	✓
EXTERNAL SHIFT LIGHT CAPABLE	✓	✓
ODOMETER AND TRIP	✓	—
LOW FUEL WARN LIGHT	✓	—
MULTIPLE RUN RECORDING	—	✓
PLAYBACK RECORDING (15 RUNS OR 2 HRS)	—	✓
# OF RECORDING CHANNELS	—	8

	0-8,000 RPM SINGLE RANGE	0-8,000 RPM DUAL RANGE	0-10,500 RPM DUAL RANGE	INFO
STREET	6001	6002	6003	INCLUDES PRO MOTORSPORTS WIRE HARNESS W/ MIL-SPEC & MINI SURE SEAL CONNECTORS, 1/8" NPT OIL TEMP, SOLID STATE OIL PRESS, WATER TEMP, SWITCH KIT, AND SPEED PULSE AMPLIFIER. FUEL LEVEL SENSOR AND VEHICLE SPEED SENSOR NOT INCLUDED. CABLE DRIVE APPLICATIONS MAY REQUIRE #5291 OR #5292. ALSO COMPATIBLE WITH GPS MODULE #5289.
RACE	6011	6012	6013	OFF-HIGHWAY USE ONLY. DOES NOT HAVE PROVISION FOR MONITORING FUEL LEVEL OR ODOMETER READINGS. INCLUDES PRO MOTORSPORTS WIRE HARNESS W/ MIL-SPEC & MINI SURE SEAL CONNECTORS, 1/8" NPT OIL TEMP, SOLID STATE OIL PRESS & FUEL PRESS (CARB OR EFT), WATER TEMP, SWITCH KIT, AND SPEED PULSE AMPLIFIER. FUEL LEVEL SENSOR AND VEHICLE SPEED SENSOR NOT INCLUDED. CABLE DRIVE APPLICATIONS MAY REQUIRE #5291 OR #5292. ALSO COMPATIBLE WITH GPS MODULE #5289.



## Test Less. Guess Less. Spend Less. **Win More.**

In 1995, Auto Meter revolutionized drag racing with the introduction of the Ultimate Playback tachometer, which featured patented technology allowing users to record and compare up to 4 passes of engine RPM data recorded at 100 samples per second. These products provided essential and accessible, high resolution performance information to racers in a familiar and easy to use package.

In 2001, Auto Meter introduced Generation 3 Ultimate II tachometers, adding innovative Tach Facts Software and the ability to record and compare both engine and driveshaft RPM on either the tach itself or graphically on a PC.

Today, Auto Meter Playback Tachometers have helped racers fine tune and diagnose clutch and converter strategies, nail their shift points, and improve their launch consistency for nearly 20 years, but we are not content to rest on our laurels.

Meet the next generation of the legendary Ultimate tachometer line, **Ultimate III** and **Ultimate DL**, which place the power of more advanced Data Acquisition systems in an affordable, convenient, and compact package.

### **Ultimate III feature highlights include:**

- 30% weight reduction from the previous Ultimate II tachometer design
- High Accuracy, competition grade air core meter movement capable of matching the most powerful engines. Achieving 0 to 10,000 RPM in a mere 333 milliseconds!
- 4 stage shift light control
- Availability in Black or Silver Dial faces of 9k and 11k RPM
- Advanced LED backlighting for improved visibility, reduced electrical system draw, and resistance to vibration and tire shake.
- New and improved ARMS (automatic recording memory start) system for worry free driver operation
- Engine and driveshaft RPM recording at 100 samples per second with up to 60 seconds of available memory
- Playback data right on the tach itself, or easily download it to award winning DataPro analysis software.
- Backed by contingency in NHRA, IHRA, NMCA, and NMRA, a 1 year competition warranty, and Auto Meter's legendary customer service and race support team.

More advanced users should consider the Ultimate DL (DataLogger) which adds to your information arsenal by providing connections for, and ability to record Wideband Air/Fuel Ratio and Pressure channel data to the Ultimate III features above, which can help you diagnose fuel delivery issues, improve power tuning, and raise MPH in the traps. Also includes Onboard tri-axis accelerometer providing advanced data about vehicle acceleration and launch, working intelligently with DataPro software to pin point not only when, but where particular events occurred on the track!

Put simply, Ultimate III and Ultimate DL tachometers from Auto Meter provide all the essential tools needed to dial in your setup minus the complication or expense.

Working from a tight budget? Check out our Sport-Comp Playback tachometers. These instruments are the Saturday night racer's no-frills workhorse. Simple operation and data review view 3 button controls on the face couldn't be easier!

# ULTIMATE DL ULTIMATE III

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

## ULTIMATE III



6882

6886

6887

6888

## ULTIMATE DL



6894

6895

6896

6897

FEATURES	SPORT-COMP™	ULTIMATE III	ULTIMATE DL
FOUR STAGE SHIFT LITE	✓	✓	✓
COMPATIBLE W/ 1-12 CYL. ENGINES	✓	✓	✓
SHORT SHIFT PROTECTION	✓	✓	✓
FIRST GEAR DELAY	✓	✓	✓
NUMBER OF RUNS	1	+4	+4
SAMPLE PER SECOND	50	100	100
RECORD TIME	UP TO 80 SECONDS	UP TO 60 SECONDS	UP TO 60 SECONDS
PC DOWNLOAD	—	✓	✓
DATAPRO SOFTWARE INCLUDED	—	✓	✓
DRIVESHAFT RPM	—	✓	✓
THREE AXIS G METER (+/- 6G)	—	—	✓
LED BACKLIGHTING	—	✓	✓
PRESSURE CHANNEL	—	—	✓
WIDEBAND AFR CHANNEL	—	—	✓

### 5" PLAYBACK TACHOMETERS

Operates on most 1 through 12 cylinder engines and are compatible with most points, standard, and electronic ignitions

	RANGE	DIAL COLOR	INFO	PART #
<b>ULTIMATE III</b>	9,000 RPM	SILVER	DUAL CHANNEL PLAYBACK RECORDS ENGINE AND DRIVESHAFT RPM. INCLUDES DATA PRO SOFTWARE. OPTIONAL FOUR-STAGE SHIFT-LITE SEE ACCESSORIES SECTION.	6882
	9,000 RPM	BLACK		6887
	11,000 RPM	SILVER		6886
	11,000 RPM	BLACK		6888
<b>ULTIMATE DL</b>	9,000 RPM	SILVER	DUAL CHANNEL PLAYBACK RECORDS ENGINE AND DRIVESHAFT RPM. OPTIONAL FOUR-STAGE SHIFT-LITE SEE ACCESSORIES SECTION. INCLUDES DATA PRO SOFTWARE, INTERNAL THREE AXIS G-METER, OPTIONAL PRESSURE AND WIDEBAND AFR CHANNEL. SENSORS SOLD SEPARATELY, SEE BELOW.	6894
	9,000 RPM	BLACK		6896
	11,000 RPM	SILVER		6895
	11,000 RPM	BLACK		6897

### SENSOR KITS

	MODEL
WIDEBAND SENSOR KIT FOR ULTIMATE DL	9133
15 PSI SENSOR KIT (8' CABLE) FOR ULTIMATE DL	9134
100 PSI SENSOR KIT (8' CABLE) FOR ULTIMATE DL	9135


30, 60, 200, 500, 1600 PSI SENSORS ALSO AVAILABLE, CONTACT AUTO METER FOR DETAILS.



GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

DATA PRO SOFTWARE

# DATAPRO SOFTWARE FOR *ULTIMATE III* & *ULTIMATE DL*

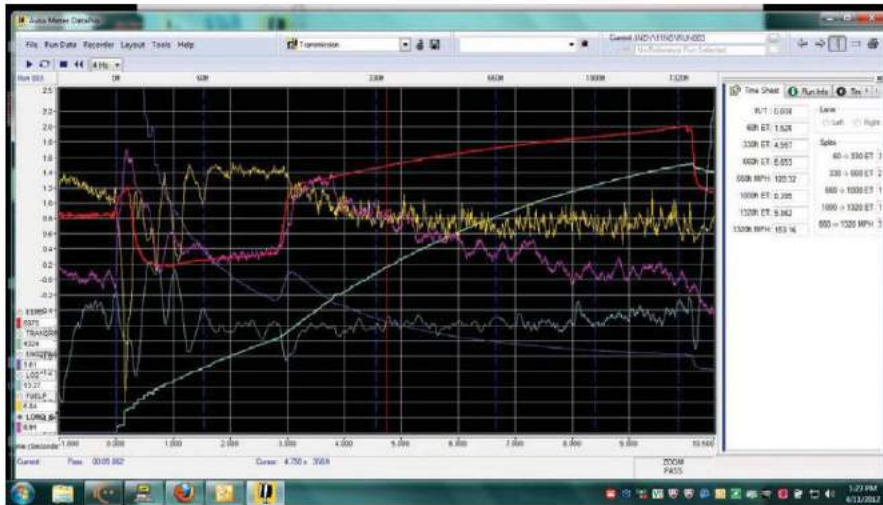

- ANALYZE WHEELSPIN, CLUTCH SLIP, CONVERTER LOCK UP, GEAR CHANGES AND MORE!
- SEE NOT ONLY WHAT HAPPENED DURING A PASS BUT ALSO WHEN AND WHERE!
- RUN COMPARISON FEATURE ALLOWS YOU TO REVIEW YOUR LAST RUN VS. YOUR BEST TO SEE WHERE TIME WAS GAINED OR LOST.
- LOG BOOK FEATURE KEEPS YOUR SETUP NOTES MATCHED WITH YOUR RUN DATA FOR EASY REFERENCE.
- COMPATIBLE WITH PC'S RUNNING WINDOWS XP, VISTA, 7, OR 8!
- LIGHTNING FAST USB DATA DOWNLOAD.
- INCLUDED WITH ULTIMATE III OR ULTIMATE DL TACHOMETERS.

\* Ultimate DL Graph Shown.

## PLAYBACK TACHS

### 5" PLAYBACK TACHOMETERS

OPERATES ON MOST 4, 6, AND 8 CYLINDER ENGINES AND ARE COMPATIBLE WITH MOST POINTS, STANDARD, AND ELECTRONIC IGNITIONS

RANGE	SERIES	INFO	PART #
9,000 RPM	SPORT-COMP™	FOUR-STAGE SHIFT-LITE. SHIFT-LITE IS OPTIONAL. INCLUDES CONNECTOR COMPATIBLE WITH QUICK-LITE, SUPER-LITE, & STANDARD INCANDESCENT LITE. SEE FEATURES ON PREVIOUS PAGE.	3966
9,000 RPM	Silver™		3964
11,000 RPM	SPORT-COMP™		3967
11,000 RPM	Silver™		3965

MODULE/PLAYBACK BOX	INFO	PART #
PLAYBACK BOX ADDS LAUNCH LIGHT AND 4 STAGE SHIFT SETTINGS WHEN A SHIFT LIGHT IS ADDED		5314



TACHOMETER/PLAYBACK  
3966



TACHOMETER/PLAYBACK  
3964



TACHOMETER/PLAYBACK  
3967



TACHOMETER/PLAYBACK  
3965



PLAYBACK BOX  
5314

**OFFICIAL LICENSED PRODUCTS**



GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

HI-DEF™ LED LIGHTING

**Speedometer & Tachometer**



**Instruments**

**Full Sweep Mechanical**  
OIL PRESSURE

**Short Sweep Electric**  
TRANS. TEMPERATURE

**Digital Stepper Motor**  
OIL PRESSURE

**Short Sweep Electric**  
VOLTMETER



INSTRUMENT	RANGE	MODEL NUMBER		INFO
		WHITE DIAL	BLACK DIAL	
<b>2 1/16" SHORT SWEEP ELECTRIC</b>				
OIL PRESSURE	0-100 PSI	880029	880015	INCLUDES 1/8" NPT SENDER, AND 1/4" NPT ADAPTER
TRANS. TEMPERATURE	100°-250° F	880033	880019	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
VOLTMETER	8-18 VOLTS	880035	880021	
WATER TEMPERATURE	100°-250° F	880030	880016	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS.
<b>2 1/16" DIGITAL STEPPER MOTOR</b>				
BOOST	0-30 PSI	880034	880020	INCLUDES MAP SENSOR & 8 FT. WIRE HARNESS
FUEL LEVEL PROGRAMMABLE	(0 Ω 280 Ω)	880027	880013	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
PYROMETER KIT	0-1600° F	880031	880017	INCLUDES TYPE K THERMOCOUPLE & 8 FT. WIRE HARNESS
WATER TEMPERATURE	100°-260° F	880032	880018	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS, 8 FT. WIRE HARNESS
<b>2 1/16" FULL SWEEP MECHANICAL</b>				
BOOST	0-35 PSI	880026	880012	INCLUDES 10 FT. NYLON TUBING & T-FITTING
BOOST/VACUUM	30 IN HG./20 PSI	880025	880011	INCLUDES 10 FT. NYLON TUBING & T-FITTING
OIL PRESSURE	0-100 PSI	880028	880018	INCLUDES 10 FT. NYLON TUBING & T-FITTING, 1/8" AND 1/4" NPT FITTINGS.
<b>3 3/8" SPEEDOMETER ELECTRIC (PROGRAMMABLE)</b>				
IN-DASH (LCD ODOMETER)	0-160 MPH	880036	880022	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 AND 5292 SENDERS AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.
<b>TACHOMETERS</b>				
3 3/8" SHIFT-LITE	0-10,000 RPM	880037	880023	OPERATES WITH MOST 2-12 CYLINDER TACH SIGNALS
3 3/8" IN-DASH	0-10,000 RPM	880038	880024	OPERATES WITH MOST 4, 6, & 8 CYLINDER TACH SIGNALS

INSTRUMENT	RANGE	DIGITAL STEPPER MOTOR	SHORT SWEEP ELECTRIC		INFO
			WHITE DIAL	BLACK DIAL	
<b>2 5/8" DRAG PAK</b>					
OIL PRESSURE (PEAK & WARN)	0-100 PSI	880249	---	---	INCLUDES 10 FT. NYLON TUBING & T-FITTING
OIL TEMP. (PEAK & WARN)	100°-340° F	880251	---	---	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8 HARNESS.
TRANS. TEMP. (PEAK & WARN)	100-260 PSI	880359	---	---	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8 HARNESS
VOLTMETER	8-18 VOLTS	---	---	880252	
WATER TEMP. (PEAK & WARN)	100°-260° F	880250	---	---	INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS, 8 FT. WIRE HARNESS
<b>TACHOMETERS</b>					
5" SHIFT-LITE	0-10,000 RPM	880248	---	---	OPERATES WITH MOST 4, 6, & 8 CYLINDER TACH SIGNALS
5" IN-DASH	0-10,000 RPM	880410	---	---	2002 & PRIOR VIPERS

Ⓜ The "Super Bezel" is a registered trademark of Auto Meter Products, Inc.

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

OFFICIAL LICENSED PRODUCTS



HI-DEF™ LED LIGHTING



RACING

INSTRUMENT	RANGE	MODEL NUMBER	INFO
<b>2 1/16" SHORT SWEEP ELECTRIC</b>			
FUEL LEVEL	(73 Ω EMPTY/10 Ω FULL)	880075	FOR MOST PRE-1989 FORDS AND PRE-1987 MUSTANGS
OIL PRESSURE	0-100 PSI	880076	1/8" NPT SENSOR, 1/4" NPT ADAPTER
VOLTMETER	8-18 VOLTS	880081	
WATER TEMPERATURE	100°-250° F	880077	1/8" NPT SENSOR, 1/2" & 3/8" NPT ADAPTER
<b>2 1/16" DIGITAL STEPPER MOTOR</b>			
BOOST/VACUUM	30 IN HG./30 PSI	880074	10 NYLON TUBING, MAP SENSOR, 8 FT. WIRING HARNESS
BRAKE PRESSURE	0-1600 PSI	880362	INCLUDES 1/8" NPT SENSOR AND 8' WIRING HARNESS
<b>DIGITAL PERFORMANCE INFORMATION CENTER GAUGE</b>			
FUEL LEVEL PROGRAMMABLE	0 Ω/280 Ω	880400	0-60 TIME, 60-0 DIST, 1/4 MILE, HP, G/S, 8 FT. WIRING HARNESS
FUEL PRESSURE	0-15 PSI	880107	FEATURES 7 PRE-SETS PLUS A UNIVERSAL PROGRAMMABLE SETTING
FUEL PRESSURE	0-100 PSI	880080	1/8" NPT SENSOR, 8 FT. WIRING HARNESS
OIL PRESSURE	0-100 PSI	880085	1/8" NPT SENSOR, 8 FT. WIRING HARNESS
OIL TEMPERATURE	140°-280° F	880079	1/8" NPT SENSOR, 1/4" NPT ADAPTER, 8 FT. WIRING HARNESS
PYROMETER KIT	0-1600° F	880078	8 HARNESS, 1/8" NPT SENSOR, 1/2" & 3/8" NPT ADAPTER
TRANSMISSION TEMPERATURE	100°-260° F	880314	K-TYPE THERMOCOUPLE, 8 FT. WIRING HARNESS
WATER TEMPERATURE	100°-260° F	880086	8 HARNESS, 1/8" NPT SENSOR, 1/2" & 3/8" NPT ADAPTER
<b>2 1/16" FULL SWEEP MECHANICAL</b>			
BOOST	0-60 PSI	880106	10 NYLON TUBING
<b>3 3/8" SPEEDOMETER ELECTRIC (PROGRAMMABLE)</b>			
IN-DASH (LCD ODOMETER)	0-160 MPH	880082	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5292 SENDER AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.
<b>TACHOMETERS</b>			
3 3/8" IN-DASH	0-10,000 RPM	880084	OPERATES WITH MOST 4, 6, & 8 CYLINDER TACH SIGNALS
3 3/8" SHIFT-LITE	0-10,000 RPM	880083	OPERATES WITH MOST 2-12 CYLINDER TACH SIGNALS
5" SHIFT-LITE	0-10,000 RPM	880281	COBRAJET SNAKE LOGO (SHOWN ABOVE). OPERATES WITH MOST 4, 6, & 8 CYLINDER TACH SIGNALS
5" SHIFT-LITE	0-10,000 RPM	880118	COBRAJET LOGO W/O SNAKE. OPERATES WITH MOST 4, 6, & 8 CYLINDER TACH SIGNALS
5" SHIFT-LITE	0-10,000 RPM	880487	12 LED SHIFT-LITE. OPERATES WITH MOST 4, 6, & 8 CYLINDER TACH SIGNALS, (COBRAJET LOGO W/O SNAKE).

# MASTERPIECE SILVER



PERIMETER LIGHTING



3 1/8" SPEEDOMETER ELECTRIC PROGRAMMABLE



880087 LCD ODOMETER ELECTRIC SPEEDOMETER KIT



# OFFICIAL LICENSED PRODUCTS

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS



CHEVY BOWTIE 5813-00406 CHEVY BOWTIE 3613-00406 GM PERFORMANCE 5832-00407 GM PERFORMANCE 5814-00407



5" SHIFT-LITE 3699-00406

INSTRUMENT	RANGE	CHEVY BOW-TIE	
		LED LIGHTING	PERIMETER LIGHTING
		BLACK DIAL	WHITE DIAL
<b>SHORT SWEEP ELECTRIC</b>			
FUEL LEVEL	0 Ω EMPTY/90 Ω FULL	3613-00406	5814-00406
OIL PRESSURE	0-100 PSI	3627-00406	5827-00406
TRANS. TEMPERATURE	100°-250° F	3649-00406	—
VOLTMETER	8-18 VOLTS	3692-00406	5891-00406
WATER TEMPERATURE	100°-250° F	3637-00406	5837-00406

GM PERFORMANCE PARTS	
PERIMETER LIGHTING	WHITE DIAL
—	2 5/8"
5814-00407	—
5827-00407	—
—	—
5891-00407	—
5837-00407	—

**INFO**  
WORKS WITH MOST 1965 TO 1996 CHEVY/GM SENDERS  
INCLUDES 1/8" NPT SENDER, AND 1/4" NPT ADAPTER  
INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS  
INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS

DIGITAL STEPPER MOTOR			
AIR FUEL RATIO (NON STEPPER MOTOR)	—	3675-00406	—
BOOST/VACUUM	30 IN HG./30 PSI	3659-00406	—
FUEL PRESSURE	0-100 PSI	3663-00406	—
NITROUS	0-2000 PSI	3674-00406	—
OIL PRESSURE	0-100 PSI	3653-00406	—
PYROMETER	0-1600° F	3644-00406	—
PYROMETER	0-2000° F	3645-00406	—
TRANS TEMPERATURE	100°-260° F	3657-00406	—
WATER TEMPERATURE	100°-260° F	3655-00406	—

GM PERFORMANCE PARTS	
PERIMETER LIGHTING	WHITE DIAL
—	—
—	—
—	—
—	—
—	—
—	—
—	—
—	—

**INFO**  
WORKS WITH MOST FACTORY NARROW BAND SENSORS OR MODEL 2244  
INCLUDES MAP SENSOR, 8 FT. WIRE HARNESS & T-FITTING  
INCLUDES 8 FT HARNESS AND SENDER  
REQUIRES 4 STAINLESS STEEL LINE. SEE ACCESSORIES. INCLUDES SENDER.  
INCLUDES 1/8" NPT SOLID STATE SENDER & 8 FT. WIRE HARNESS  
INCLUDES TYPE K THERMO COUPLE & 8 FT. WIRE HARNESS  
INCLUDES TYPE K THERMO COUPLE & 8 FT. WIRE HARNESS  
INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS  
INCLUDES 1/8" NPT SENDER, 3/8" AND 1/2" NPT FITTINGS

FULL SWEEP MECHANICAL			
BOOST	0-35 PSI	3604-00406	—
BOOST	0-60 PSI	3605-00406	—
BOOST/VACUUM	30 IN HG./20 PSI	3607-00406	—
BOOST/VACUUM	30 IN HG./30 PSI	3603-00406	—
FUEL PRESSURE	0-15 PSI	—	5813-00406
FUEL PRESSURE	0-100 PSI	—	5812-00406
NITROUS	0-2000 PSI	—	5828-00406
OIL PRESSURE	0-100 PSI	3621-00406	5821-00406
WATER TEMPERATURE	120°-240° F	3632-00406	5832-00406

GM PERFORMANCE PARTS	
PERIMETER LIGHTING	WHITE DIAL
—	—
—	—
—	—
—	—
5813-00407	—
5812-00407	—
5828-00407	—
5821-00407	—
5832-00407	—

**INFO**  
INCLUDES 10 FT. NYLON TUBING  
INCLUDES 10 FT. NYLON TUBING  
INCLUDES 10 FT. NYLON TUBING & T-FITTING  
INCLUDES 10 FT. NYLON TUBING & T-FITTING  
INCLUDES ISOLATOR AND 4' LINE. REQUIRES BRAIDED LINE TO FUEL SOURCE  
REQUIRES 4 STAINLESS STEEL LINE. SEE ACCESSORIES. EXTERIOR MOUNTING ONLY  
REQUIRES 4 STAINLESS STEEL LINE. SEE ACCESSORIES  
INCLUDES 10 FT. NYLON TUBING & 1/4" NPT FITTING  
INCLUDES 8 FT. CAPILLARY TUBING

INSTRUMENT	RANGE	CHEVY BOW-TIE	
		LED LIGHTING	PERIMETER LIGHTING
		BLACK DIAL	WHITE DIAL
<b>SPEEDOMETER ELECTRIC (PROGRAMMABLE)</b>			
3 3/8" IN-DASH (LCD ODOMETER)	0-160 MPH	3688-00406	—
5" IN-DASH (LCD ODOMETER)	0-160 MPH	—	5889-00406

GM PERFORMANCE PARTS	
PERIMETER LIGHTING	WHITE DIAL
—	—
5889-00407	—

**INFO**  
PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5291 SENDER AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5269.

TACHOMETERS			
3 3/4" PED. MOUNT TACH	0-8,000 RPM	—	5780-00406
3 3/8" IN-DASH	0-10,000 RPM	3697-00406	—
3 3/8" SHIFT-LITE	0-10,000 RPM	3690-00406	—
5" IN-DASH	0-10,000 RPM	—	5898-00406
5" MEMORY TACH	0-10,000 RPM	—	5795-00406
5" SHIFT-LITE	0-10,000 RPM	3699-00406	5899-00406

GM PERFORMANCE PARTS	
PERIMETER LIGHTING	WHITE DIAL
5780-00407	—
—	—
—	—
5898-00407	—
5795-00407	—
5899-00407	—

**INFO**  
FEATURES ADJUSTABLE REDLINE POINTER  
FOR IN-DASH MOUNTING INTO A 3 3/8" DIAMETER HOLE  
INCLUDES EXTERNAL LED MINI QUICK LITE W/ AMBER LED FOR IN-DASH MOUNTING  
MEMORY RECALL TO HIGHEST RPM  
SHIFT-LITE TACHOMETER WITH EXTERNAL INCANDESCENT AMBER SHIFT-LITE

## CHEVY VINTAGE

KITS		PERIMETER LIGHTING
3 1/8"	5 PIECE 120 MPH ELECTRIC SPEEDO KIT	1302-00408
3 1/8"	5 PIECE 120 MPH MECHANICAL SPEEDO KIT	1300-00408
5"	QUAD GAUGE W 120 MPH SPEEDO KIT	1303-00408
TACHOMETER		PERIMETER LIGHTING
3 1/8"	7,000 RPM	1398-00408



3 1/8" SPEEDOMETER ELECTRIC PROGRAMMABLE 1302-00408 LCD ODOMETER ELECTRIC SPEEDOMETER KIT  
2 1/16" FUEL LEVEL (0 Ω EMPTY/90 Ω FULL) 2 1/16" WATER TEMPERATURE  
INCLUDES ALL SENSORS  
2 1/16" OIL PRESSURE 2 1/16" VOLTMETER  
1317-00408 1337-00408 1327-00408 1391-00408  
1388-00408

The "Super Bezel" is a registered trademark of Auto Meter Products, Inc.

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

# COPO CAMARO GAUGES

HI-DEF™ LED LIGHTING

## Tachometer



Auto Meter is proud to be the official licensed supplier for the performance gauge pack in the new COPO Camaro. Designed to commemorate the original Central Office Production Order (COPO) system used by dealers in 1969 to offer performance models that were designed to be the quickest in NHRA Stock Eliminator and Super Stock classes. The current generation of COPO Camaros, are limited production models specially designed for NHRA competition today.

When Chevrolet Performance decided to build the COPO Camaro they knew they couldn't trust just any instrument to track the vitals of the beast. So they contacted Auto Meter, manufacturer of the most trusted instruments in NHRA and NASCAR competition, to draw on our nearly 60 years of racing instrument experience for help putting together the ultimate NHRA-ready competition gauge pack.

The end result is what you see here. A unique instrument set that was designed to the Chevrolet Performance COPO team's exacting standards.

While we might not all be able to get our hands on one of the limited edition COPO Camaros, Auto Meter is pleased to be able to offer you the COPO Camaro Gauge Pack instruments separately to help complete your latest Chevrolet project.

## Instruments



### PEDESTAL MOUNT TACHOMETERS

THESE MODELS OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	5"
10,000 RPM	SHIFT-LITE	SHIFT-LITE TACHOMETER WITH EXTERNAL INCANDESCENT AMBER SHIFT-LITE	880445

GAUGES	RANGE	DIGITAL STEPPER MOTOR	SHORT SWEEP ELECTRIC	INFO
		2 1/16"	2 1/16"	
BRAKE PRESSURE	0-1600 PSI	880450	—	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
FUEL PRESSURE	0-100 PSI	880449	—	INCLUDES 1/8" NPT SENDER AND 8' WIRING HARNESS
OIL PRESSURE	0-100 PSI	880447	—	INCLUDES 1/8" NPT SENDER, 8' WIRING HARNESS & 1/4" NPT FITTING
TRANSMISSION TEMPERATURE	100°-260° F	880448	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS
VOLTMETER	8-18 VOLTS	—	880444	—
WATER TEMPERATURE	100°-260° F	880446	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS & 8' HARNESS

# OFFICIAL LICENSED JEEP GAUGES

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

## Kit

87-95 JEEP KIT (YJ)  
COMPLETE INSTRUMENT KIT



7040

## Speedometer & Tachometer

IN-DASH SPEEDOMETER/  
MECHANICAL



880244

IN-DASH TACHOMETER



880246

## Short Sweep Electric

OIL PRESSURE



880240

VOLTMETER



880242

WATER TEMPERATURE



880241

TRANSMISSION TEMPERATURE



880260

## Instruments

### IN-DASH TACHOMETERS

OPERATE ON MOST 4, 6, AND 8 CYLINDER ENGINES. COMPATIBLE WITH MOST POINTS, STANDARD, AND PERFORMANCE ELECTRONIC IGNITIONS

RANGE	DESCRIPTION	INFO	3 3/8"
8,000 RPM	IN-DASH	FOR IN-DASH MOUNTING. SEE MOUNTING SOLUTIONS FOR CUP/PEDESTAL OPTIONS.	880246

### IN-DASH SPEEDOMETERS

RANGE	DESCRIPTION	INFO	3 3/8"
160 MPH	IN-DASH/ELECTRIC	PROGRAMMABLE SPEEDOMETERS COMPATIBLE WITH MOST FACTORY VEHICLE SPEED SENSORS. MODEL 5281 AND 5292 SENDERS ARE AVAILABLE FOR SOME CABLE DRIVE APPLICATIONS. ALSO COMPATIBLE WITH GPS MODULE 5289.	880244
120 MPH	IN-DASH/MECHANICAL	MECHANICAL SPEEDOMETERS INCLUDE A 5/8"-18 THREADED CABLE INPUT. SPEEDOMETER CABLE IS REQUIRED.	880245

### SHORT SWEEP ELECTRIC

GAUGES	RANGE	2 1/16"	INFO
AXLE TEMPERATURE	100°-250° F	880431	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS
FUEL LEVEL	(73 Ω EMPTY/10 Ω FULL)	880428	WORKS WITH MOST 70 S TO 86 JEEP PRE 1989 (PRE 87 MUSTANG) FACTORY FORD AND MOST FACTORY CHRYSLER. SENDER MAY NOT READ PROPERLY WITH AFTERMARKET OR REPRODUCTION SENDERS.
FUEL LEVEL	(0 Ω EMPTY/90 Ω FULL)	880243	WORKS WITH MOST 1985 TO 1997 CHEVY/GM SENDERS AND 87-95 JEEP WRANGLER SENDER
OIL PRESSURE	0-100 PSI	880240	1/8" NPT SENDER AND 1/4" NPT ADAPTER.
OIL TEMPERATURE	100°-250° F	880429	
TRANSFER CASE TEMPERATURE	100°-250° F	880430	
TRANSMISSION TEMPERATURE	100°-250° F	880260	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS.
VOLTMETER	8-18 VOLTS	880242	
WATER TEMPERATURE	100°-250° F	880241	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS.

### 87-95 JEEP YJ KIT

KIT	INFO	3 3/8" & 2 1/16"
3 3/8" ELECTRIC SPEEDO & TACHOMETER KIT 2 1/16" 5 PIECE GAUGE KIT	INCLUDES 3 3/8" 160 MPH ELECTRIC PROGRAMMABLE SPEEDOMETER WITH LCD ODOMETER, BK TACHOMETER, 2 1/16" 100°-250° F WATER TEMP, 0-100 PSI OIL PRESS, 0 Ω E - 90 Ω F FUEL LEVEL, AND 8-18 VOLTMETER. INCLUDES BOTH TEMP SENDERS & OIL PSI SENDER. INCLUDES 3/8" & 1/2" NPT FITTINGS, AND WIRING HARNESS	7040

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

**ecometer**

ecometer™ by Auto Meter is a fuel consumption eco-gauge that helps drivers visually monitor how their driving style impacts their vehicle's fuel consumption.

**INSTALLS INTO THE VEHICLE'S OBD PORT AND CAPTURES KEY ENGINE & VEHICLE PARAMETERS**



- **SIMPLE PLUG IN INSTALLATION**
- **NO DRILLING REQUIRED**
- **NO SPECIAL TOOLS REQUIRED**
- **E-Z VIEW MOUNT ALLOWS FOR OPTIMAL VISIBILITY AND ALIGNMENT**
- **TURNS ON AND OFF WITH YOUR VEHICLE**

Displays Real-Time Fuel Economy by Monitoring Key Engine & Vehicle Parameters

Compact 2 1/16" Size for Easy Unobtrusive Installation

Plug & Play, CAN Based Instrument

E-Z Installation: 1 Cord, 1 Connection



• Customizable to the specific vehicle's type (compact, full size, crossover/mini-van or truck/SUV)

• Uses proprietary software to calculate fuel economy performance (real time and/or average)

• Display real time fuel economy performance in both a radial energy consumption graph and in a precise, easy-to-read digital format

• Offers 4 different modes that can be easily selected by the driver at the touch of a button

– Instantaneous Fuel Economy, Average Fuel Economy, Digital Tachometer with Instantaneous Fuel Economy, Digital Speedometer with Instantaneous Fuel Economy

**INSTANTANEOUS MPG MODE**

55 MPH HIGHWAY    ACCELERATING TO 65 MPH    HARD ACCELERATING: 70 MPH TO PASS



Radial Fuel Efficiency Graph

**AVERAGE MPG MODE**

FULL SIZED VEHICLE IN CITY DRIVING    WAITING AT A STOP LIGHT



Radial Fuel Efficiency Graph Shows 0 MPG - Low Efficiency

GAUGES	FULL SWEEP ELECTRIC		INFO
	2 1/16"		
ECOMETER	9105		MOST 1996 & NEWER GASOLINE POWERED VEHICLES. NOT COMPATIBLE WITH DIESEL, GAS/ELECTRIC OR CHRYSLER MDS.

SHIFT-LITE TACHOMETER



233911

## Tachometers

BLACK TACHOMETER



2300

MINI TACHOMETER



2305

## Instruments

### Short Sweep Mechanical

OIL PRESSURE



2360

### Short Sweep Electric

WATER TEMPERATURE



2355

VOLTMETER



2362

VOLTMETER



2319

### Full Sweep Mechanical

## Instruments

WATER TEMPERATURE



2352

OIL PRESSURE



2332

TEMPERATURE



2335

WATER TEMPERATURE



2313



GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

**Auto gage**

**Consoles**

WITH MECHANICAL TEMPERATURE AND PRESSURE



2393



2347



2392



2345



2397



2349




2398



2399

## Consoles

WITH MECHANICAL TEMPERATURE AND PRESSURE (EXCEPT 2391)

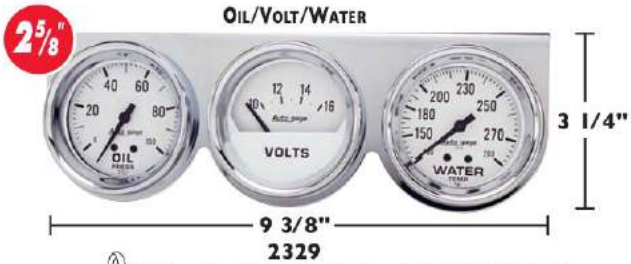



**PEDESTAL MOUNT TACHOMETERS**

OPERATES ON 4, 6, OR 8 CYLINDER ENGINES WITH POINTS, ELECTRONIC, AND MOST 12 & 16 VOLT PERFORMANCE IGNITIONS.

RANGE	DESCRIPTION	INFO	2 3/4"	3 3/4"	5"
6,000 RPM	MINI	MINI TACHOMETER/BLACK. (CANNOT ROTATE DIAL FACE)	2306	—	—
8,000 RPM	MINI	MINI TACHOMETER/BLACK. (CANNOT ROTATE DIAL FACE)	2305	—	—
8,000 RPM		BLACK CASE AND BEZEL W/ BLACK DIAL. FEATURES ADJUSTABLE REDLINE	—	2300	—
8,000 RPM		BLACK CASE AND BEZEL W/ WHITE DIAL. FEATURES ADJUSTABLE REDLINE	—	2303	—
8,000 RPM		CHROME CASE AND BEZEL W/ BLACK DIAL. FEATURES ADJUSTABLE REDLINE	—	2301	—
8,000 RPM		CHROME CASE AND BEZEL W/ WHITE DIAL. FEATURES ADJUSTABLE REDLINE	—	2304	—
8,000 RPM	SHIFT-LIGHT	BLACK CASE AND BEZEL W/ EXTERNAL LED SHIFT LIGHT. LIGHT POSITION IS FIXED	—	2309	—
8,000 RPM	SHIFT-LIGHT	BLACK CASE AND BEZEL W/ LED SHIFT LIGHT ON THE DIAL.	—	2302	—
8,000 RPM	SHIFT-LITE	BLACK SHIFT LIGHT TACHOMETER W/ EXTERNAL INCANDESCENT SHIFT LIGHT W/AMBER LENS	—	—	233905
10,000 RPM	SHIFT-LITE	BLACK SHIFT LIGHT TACHOMETER W/ EXTERNAL INCANDESCENT SHIFT LIGHT W/AMBER LENS	—	—	233904
10,000 RPM	SHIFT-LITE	SILVER SHIFT LIGHT TACHOMETER W/ EXTERNAL INCANDESCENT SHIFT LIGHT W/AMBER LENS	—	—	233911
10,000 RPM	MEMORY	BLACK MEMORY TACHOMETER. RECALLS HIGHEST RPM ACHIEVED. BLACK. EXTERNAL SHIFT LIGHT CAN BE ADDED.	—	—	233902
10,000 RPM	SHIFT-LITE	BLACK SHIFT LIGHT TACHOMETER W/ EXTERNAL LIGHT AND MEMORY	—	—	233906
10,000 RPM	SHIFT-LIGHT	BLACK SHIFT LIGHT TACHOMETER W/ SMALL AMBER LIGHT ON SHIELD	—	—	233903
10,000 RPM	MEMORY	SILVER MEMORY TACHOMETER. RECALLS HIGHEST RPM ACHIEVED	—	—	233907

SHORT SWEEP CONSOLES	RANGE	CONSOLE	WHITE GAUGE			BLACK GAUGE		INFO
			2 1/8"	2 5/8"	1 1/2"	2 1/8"	2 5/8"	
TWO-GAUGE	(OIL/WATER)	BLACK	2323	—	—	2345	—	OIL PRESSURE INCLUDES NYLON 6 TUBING WATER TEMPERATURE INCLUDES 6' CAPILLARY TUBING 2347 AMMETER REQUIRES 10 GAUGE WIRE ALL INCLUDE 1/8", 1/4", 3/8", & 1/2" NPT FITTINGS.
THREE-GAUGE	(OIL/AMP/WATER)	BLACK	—	—	—	2347	—	
THREE-GAUGE	(OIL/VOLT/WATER)	BLACK	2324	—	—	2348	—	
THREE-GAUGE/ELECTRIC	(OIL/VOLT/WATER)	BLACK	—	—	2391	—	—	
THREE-GAUGE	(OIL/VOLT/WATER)	CHROME	2325	—	—	2349	—	

FULL SWEEP CONSOLES	RANGE	CONSOLE	WHITE GAUGE			BLACK GAUGE		INFO
			2 1/8"	2 5/8"	1 1/2"	2 1/8"	2 5/8"	
TWO-GAUGE	(OIL/WATER)	BLACK	2326	—	—	2392	—	OIL PRESSURE INCLUDES NYLON 6 TUBING WATER TEMPERATURE INCLUDES 6' CAPILLARY TUBING 2393, 2394, & 2395 AMMETERS REQUIRE 10 GAUGE WIRE ALL INCLUDE 1/8", 1/4", 3/8", & 1/2" NPT FITTINGS.
THREE-GAUGE	(OIL/AMP/WATER)	BLACK	—	—	—	2393	2394	
THREE-GAUGE	(OIL/VOLT/WATER)	BLACK	2327	2328	2396	2397	2398	
THREE-GAUGE	(OIL/AMP/WATER)	CHROME	—	—	—	—	2395	
THREE-GAUGE	(OIL/VOLT/WATER)	CHROME	—	2329	—	—	2399	

BLACK SHORT SWEEP MECHANICAL	RANGE	1 1/2"*	2 1/8"*	2 5/8"	INFO
OIL PRESSURE	0-100 PSI	—	2360	—	INCLUDE 6' NYLON TUBING, 1/8" & 1/4" NPT FITTINGS.
WATER TEMP	130°-280° F	—	2361	—	INCLUDES 6' TUBING, 3/8" & 1/2" NPT FITTINGS.

BLACK FULL SWEEP MECHANICAL	RANGE	1 1/2"*	2 1/8"*	2 5/8"	INFO
BOOST/VACUUM/MECHANICAL	30INHG/20PSI	—	—	2310	INCLUDES 6' TUBING & 1/4" NPT FITTING.
FUEL PRESSURE/MECHANICAL	0-15 PSI	—	—	2311	REQUIRES #4 BRAIDED HOSE AND MOUNTING CLIP. MUST BE MOUNTED OUTSIDE VEHICLE.
OIL PRESSURE/MECHANICAL	0-100 PS	—	2332	2312	INCLUDE 6' NYLON TUBING, 1/8" & 1/4" NPT FITTINGS.
OIL TEMP/MECHANICAL	100°-340° F	—	—	2314	INCLUDES 6' CAPILLARY TUBING, 3/8" & 1/2" NPT FITTINGS.
VACUUM/MECHANICAL	30 IN.HG.	—	2337	2317	INCLUDES 6' NYLON TUBING AND UNIVERSAL T-FITTING.
WATER TEMP/MECHANICAL	100°-280° F	—	2333	2313	INCLUDES 6' CAPILLARY TUBING, 3/8" & 1/2" NPT FITTINGS.

BLACK SHORT SWEEP ELECTRIC	RANGE	1 1/2"*	2 1/8"*	2 5/8"	INFO
FUEL LEVEL/ELECTRIC	(0 Ω EMPTY/90 Ω FULL)	—	—	2316	FOR MOST GM VEHICLES 1965 TO 1997. WILL NOT OPERATE ON SOME 1999 OR LATER VEHICLES WITH 40-250 OHM SENDER.
FUEL LEVEL/ELECTRIC	(73 Ω EMPTY/110 Ω FULL)	—	—	2315	FOR MOST FORD VEHICLES BEFORE 1989 (EXCEPT 1987 & LATER MUSTANGS) AND MOST CHRYSLER VEHICLES.
OIL PRESSURE/ELECTRIC	0-100 PSI	2354	—	—	INCLUDES 1/8" NPT SENDER & 1/4" NPT FITTING.
VOLTMETER/ELECTRIC	8-18 VOLTS	2356	—	—	
VOLTMETER/ELECTRIC	10-16 VOLTS	—	2362	2319	
WATER TEMP/ELECTRIC	100°-280° F	2355	—	—	INCLUDES 1/8" NPT SENDER, 3/8" & 1/2" NPT FITTINGS.
WATER TEMP/MECHANICAL	130°-280° F	2352	—	—	INCLUDES 6' CAPILLARY TUBING, 3/8" & 1/2" NPT FITTINGS.

\* 1-1/2" & 2-1/8" INCLUDE MOUNTING PANEL

AUTOGAGE SILVER	RANGE	FULL SWEEP MECHANICAL 2 1/8"	SHORT SWEEP ELECTRIC 2 1/8"	INFO
PRESSURE (WITH PANEL)	0-100 PSI	2334	—	INCLUDE 10' NYLON TUBING, 1/8" AND 1/4" NPT FITTINGS.
TEMPERATURE (WITH PANEL)	140°-280° F	2335	—	INCLUDES 6' CAPILLARY TUBING AND 1/2" NPT FITTING.
VOLTS (WITH PANEL)	8-18 VOLTS	—	2380	

# RAM MOUNTING SOLUTIONS

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS



**RAM PILLARS (2010-2015)**

**17218 (REPLACEMENT)**

**17219 (REPLACEMENT)**

**13117/13120/13121 (PILLAR POD)**

**RAM PODS & PILLARS (1998-2002)**



**TRIPLE PILLAR 17203 17205 w/speaker hole cutout**

**DUAL PILLAR 17202 17204 w/speaker hole cutout**

**RAM PODS & PILLARS (2003-2009)**



**15213**

**17211**

**17213 (REPLACEMENT)**

**RAM PODS & PILLARS (1998-2002)**



**15204**

**15203**

**RAM STEERING COLUMN POD (2003-2009)**

Mounts On Top Of/Covers Existing Steering Column Trim



**15014**

**TOP DASH POD (1998-2002)**

Mounts On Center Top Of Dash Near Windshield, Gauges Angle Towards Driver



**15002**

**STEERING COLUMN POD (1994-2002)**

Mounts On Top Of/Covers Existing Steering Column Trim



**15012**

**CELL PHONE/CUP HOLDER (1998-2002)**

Attaches to Fold Down Arm Rest Provides Additional Storage



**P10175**

**CELL PHONE/CUP HOLDER (2003-2008)**

Attaches to Fold Down Arm Rest Provides Additional Storage



**P10180**

RAM MOUNTING SOLUTIONS	POD		A-PILLAR			OVERHEAD CONSOLE			STEERING COLUMN		DASH POD	CONSOLE POD	CELL PHONE/CUP HOLDER
	SINGLE	DUAL	SINGLE	DUAL	TRIPLE	DUAL	TRIPLE	QUAD	SINGLE	DUAL	TRIPLE	TRIPLE	
DODGE RAM 98-02	15204	15203	—	17202	17203	—	—	—	15012	—	15002	—	P10175
DODGE RAM WITH SPEAKER 98-02	—	—	—	17204	17205	—	—	—	—	—	—	—	
DODGE RAM 03-05	—	—	—	—	—	—	—	18018	—	—	15020	15021	P10180
DODGE RAM 03-09	15213	15212	—	—	—	18016	18017	—	15013	15014	—	—	
DODGE RAM 03-09 (REPLACEMENT) TAUPE	—	—	17211	17212	17213	—	—	—	—	—	—	—	—

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

# SILVERADO/SIERRA MOUNTING SOLUTIONS

## GM PILLARS (2015+) (REPLACEMENT)



## GM PILLARS (2007.5-2014) (REPLACEMENT)



## SILVERADO/SIERRA PODS & PILLARS (2001-2007)



## GM STEERING COLUMN POD (2007-2014)



## OVERHEAD CONSOLES (2001-2007)



## STEERING COLUMN (2001-2002)



PODS & PILLARS (GAUGES NOT INCLUDED)	DUAL PODS	SINGLE PODS	STEERING COLUMN POD	OVERHEAD CONSOLE POD			SINGLE PILLAR	DUAL PILLAR	TRIPLE PILLAR
	2 1/16"	2 1/16"	2 1/16"	DUAL	TRIPLE	QUAD	2 1/16"	2 1/16"	2 1/16"
CHEVY/GM, FS TRUCK/DURAMAX 01-07 "CLASSIC"	15104	15105	—	—	—	—	—	17104	17105
CHEVY/GM, FS TRUCK/DURAMAX 01-07 "CLASSIC" (W/SPEAKER HOLE)	—	—	—	—	—	—	—	17106	17107
GM FULLSIZE 01-07	—	—	—	18022	18023	18024	—	—	—
GM FS TRUCK/DURAMAX 01-02 (AUTOMATIC)	—	—	15007	—	—	—	—	—	—
GM FS TRUCK/DURAMAX 01-02 (MANUAL)	—	—	15008	—	—	—	—	—	—
GM 07-14 (W/O FACTORY PILLAR SPEAKER HOLE)	—	—	15023	—	—	—	—	17115	17116
GM 07-14 (W PILLAR SPEAKER HOLE)	—	—	—	—	—	—	—	17117	17118
GM 2015+	—	—	—	—	—	—	17119	17120	17121

\* Mounts On Top Of Existing Steering Column Trim.

# FORD SUPER DUTY MOUNTING SOLUTIONS

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

## FORD SUPER DUTY POD (1999-2002)



## FORD SUPER DUTY POD (2008-2010)



## FORD SUPER DUTY POD (2003-2007)



## FORD SUPER DUTY PILLARS (2011-2015) (REPLACEMENT)



## FORD SUPER DUTY PILLARS (2008-2010) (REPLACEMENT)



## FORD SUPER DUTY PILLARS (1999-2007)



GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

# FORD SUPER DUTY MOUNTING SOLUTIONS

## FORD SUPER DUTY STEERING COLUMN POD

\* Mounts On Top Of/Covers Existing Steering Column Trim

(2008-2010)



**15024**  
w/automatic transmission

(2011-2015)



**15026**  
w/automatic transmission

## FORD SUPER DUTY TOP DASH POD (2008-2012)

\* Mounts On Top Of Driver's Side Dash Between A-Pillar and Instrument Cluster



**15025**

## FORD F-150 F-SERIES (2004-2008)



**15313**

## FORD SUPER DUTY INSTRUMENT CLUSTER BEZEL (1999-2004)



**15003**

## FORD SUPER DUTY CELL PHONE/CUP HOLDER (1999-2004)



**P10190**

## FORD SUPER DUTY OVERHEAD CONSOLES (1999-2004)



**18016**



**18017**

DOES NOT INCLUDE GAUGES



**18018**

PODS & PILLARS (GAUGES NOT INCLUDED)	DUAL PODS	SINGLE PODS	TRIPLE CONSOLE PODS	TRIPLE DASH PODS	STEERING COLUMN POD	SINGLE PILLAR	DUAL PILLAR	TRIPLE PILLAR	QUAD PILLAR	INSTRUMENT CLUSTER BEZEL	CELL PHONE/CUP HOLDER
	2 1/16"	2 1/16"	2 1/16"	2 1/16"	2 1/16"	2 1/16"	2 1/16"	2 1/16"	2 1/16"	2 1/16"	
FORD SUPER DUTY 99-02 & EXCURSION	15306	15307	—	—	—	—	—	—	—	—	
FORD SUPER DUTY 99-04	—	—	—	—	—	—	—	—	—	15003	
FORD SUPER DUTY 99-07	—	—	15018	15016	—	—	17306	17307	17308	—	
FORD SUPER DUTY 99-07 (AUTOMATIC)	—	—	—	—	15010	—	—	—	—	—	
FORD SUPER DUTY 99-04 (MANUAL)	—	—	—	—	15011	—	—	—	—	—	
FORD SUPER DUTY 03-07 & EXCURSION	15318	—	—	—	—	—	—	—	—	—	
FORD SUPER DUTY 03-07 W/O HANDLE	—	15319	—	—	—	—	—	—	—	—	P10190
FORD F-SERIES 04-08	—	15313	—	—	—	—	—	—	—	—	
FORD SUPER DUTY 08-10	—	15314	—	—	15024	—	—	—	—	—	
FORD SUPER DUTY 08-10 REPLACEMENT	—	—	—	—	—	—	17312	17313	—	—	
FORD SUPER DUTY 08-12	15025	—	—	—	—	—	—	—	—	—	
FORD SUPER DUTY 11-15	—	—	—	—	15026	17321	17322	17323	—	—	

# POD & PILLAR KIT MOUNTING SOLUTIONS

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

## RAM PILLAR KITS (2003-2009)

(PHANTOM GAUGES INCLUDED)

- \* Sending Units Included
- \* White Incandescent Perimeter Backlighting
- \* LED Replacement Bulbs Available Separately - See Accessories For Colors & Model Numbers



**TWO GAUGE PILLAR KIT**  
MECHANICAL BOOST 0-60 PSI,  
DIGITAL STEPPER MOTOR PYROMETER 0-1600° F  
**7097**



**THREE GAUGE PILLAR KIT**  
MECHANICAL BOOST 0-60 PSI,  
DIGITAL STEPPER MOTOR PYROMETER 0-1600° F,  
SHORT SWEEP ELECTRIC TRANSMISSION TEMPERATURE 100-250° F  
**7098**

## RAM PILLAR KITS (1998-2002)

(Z-SERIES GAUGES INCLUDED)

- \* Sending Units Included
- \* White Incandescent Perimeter Backlighting
- \* LED Replacement Bulbs Available Separately - See Accessories For Colors & Model Numbers



**SINGLE GAUGE KIT**  
SHORT SWEEP ELECTRIC TRANSMISSION TEMPERATURE 100-250° F  
**7090**



**TWO GAUGE PILLAR KIT**  
MECHANICAL BOOST 0-35 PSI,  
DIGITAL STEPPER MOTOR PYROMETER 0-1600° F  
**7091**  
w/speaker hole cut out



**THREE GAUGE PILLAR KIT**  
MECHANICAL BOOST 0-35 PSI,  
DIGITAL STEPPER MOTOR PYROMETER 0-1600° F,  
SHORT SWEEP ELECTRIC TRANSMISSION TEMPERATURE 100-250° F  
**7092**  
w/speaker hole cut out

## RAM PILLAR KITS RAM (1998-2002)

(ULTRA-LITE GAUGES INCLUDED)

- \* Sending Units Included
- \* White Incandescent Perimeter Backlighting
- \* LED Replacement Bulbs Available Separately - See Accessories For Colors & Model Numbers



**SINGLE GAUGE KIT**  
SHORT SWEEP ELECTRIC TRANSMISSION TEMPERATURE 100-250° F  
**7093**



**TWO GAUGE PILLAR KIT**  
MECHANICAL BOOST 0-35 PSI,  
DIGITAL STEPPER MOTOR PYROMETER 0-1600° F  
**7094**  
w/speaker hole cut out



**THREE GAUGE PILLAR KIT**  
MECHANICAL BOOST 0-35 PSI,  
DIGITAL STEPPER MOTOR PYROMETER 0-1600° F,  
SHORT SWEEP ELECTRIC TRANSMISSION TEMPERATURE 100-250° F  
**7095**  
w/speaker hole cut out



GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

# POD & PILLAR KIT MOUNTING SOLUTIONS

## FORD PODS & PILLARS

PODS (1999-2002)  
PILLARS (1999-2007)  
(ULTRA-LITE GAUGES INCLUDED)

- \* Includes Sending Units & White Incandescent Lighting
- \* LED Replacement Bulbs Available Separately - See Accessories For Colors & Model Numbers

FOR 1999-2002 ONLY  
FORD SUPER DUTY  
SHORT SWEEP ELECTRIC  
TRANSMISSION  
TEMPERATURE  
100-250 F



7073

FOR 1999-2007  
FORD SUPER DUTY  
MECHANICAL  
BOOST 0-35 PSI,  
DIGITAL STEPPER MOTOR  
PYROMETER 0-1600 F



7074

FOR 1999-2007  
FORD SUPER DUTY  
MECHANICAL  
BOOST 0-35 PSI,  
DIGITAL STEPPER MOTOR  
PYROMETER 0-1600 F,  
SHORT SWEEP ELECTRIC  
TRANSMISSION TEMPERATURE  
100-250 F



7075

## FORD PODS & PILLARS

PODS (1999-2002)  
PILLARS (1999-2007)  
(Z-SERIES GAUGES INCLUDED)

- \* Includes Sending Units & White Incandescent Lighting
- \* LED Replacement Bulbs Available Separately - See Accessories For Colors & Model Numbers

FOR 1999-2002  
FORD SUPER DUTY  
SHORT SWEEP  
ELECTRIC  
TRANSMISSION  
TEMPERATURE  
100-250 F



7070

FOR 1999-2007  
FORD SUPER DUTY  
MECHANICAL  
BOOST 0-35 PSI,  
DIGITAL STEPPER MOTOR  
PYROMETER 0-1600 F



7071

FOR 1999-2007  
FORD SUPER DUTY  
MECHANICAL  
BOOST 0-35 PSI,  
DIGITAL STEPPER MOTOR  
PYROMETER 0-1600 F,  
SHORT SWEEP ELECTRIC  
TRANSMISSION  
TEMPERATURE  
100-250 F



7072

## GM PILLAR KITS (2001-2007)

Z-Series Gauges Included

- \* Includes Sending Units & White Incandescent Lighting
- \* LED Replacement Bulbs Available Separately - See Accessories For Colors & Model Numbers

FOR 2000-2007  
GM DURAMAX  
SHORT SWEEP  
ELECTRIC  
TRANSMISSION  
TEMPERATURE  
100-250 F



7080

FOR 2000-2007  
GM DURAMAX  
MECHANICAL  
BOOST 0-35 PSI,  
DIGITAL STEPPER MOTOR  
PYROMETER 0-1600 F



7081

## JEEP JK PILLAR KIT (2011-2015)

Sport-Comp II Gauges Included

- \* Includes Sending Units & White LED Lighting

SHORT SWEEP  
ELECTRIC  
TRANSMISSION  
TEMPERATURE  
100-250 F,  
SHORT SWEEP  
ELECTRIC  
OIL PRESSURE  
0-100 PSI



7041

# DIRECT FIT MOUNTING SOLUTIONS

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

GAUGES NOT INCLUDED WITH AUTO METER DIRECT FIT PRODUCTS.

DIRECT FIT 67-68  
CHEVROLET/PONTIAC  
CAMARO/ FIREBIRD  
3 3/8" & 2 1/16"



DIRECT FIT 69  
CHEVROLET  
CAMARO  
5" & 2 1/16"



DIRECT FIT 70-78  
CHEVROLET CAMARO  
3 3/8" & 2 1/16"



panel with gauges <b>7020</b>	panel with gauges <b>7021</b>	panel with gauges <b>7022</b>
panel without gauges <b>2130</b>	panel without gauges <b>2131</b>	panel without gauges <b>2132</b>

DIRECT FIT 79-81  
CHEVROLET CAMARO  
3 3/8" & 2 1/16"



DIRECT FIT 69-75  
CHEVROLET NOVA  
5" & 2 1/16"



DIRECT FIT 70-72  
CHEVROLET/CHEVELLE SS/EL CAMINO SS/ MALIBU SS  
3 3/8" & 2 1/16"



panel with gauges <b>7023</b>	panel with gauges <b>7024</b>	panel with gauges <b>7025</b>
panel without gauges <b>2133</b>	panel without gauges <b>2134</b>	panel without gauges <b>2136</b>

DIRECT FIT 70-72  
CHEVELLE/CAMINO/  
MONTE CARLO  
3 3/8" & 2 1/16"



DIRECT FIT 73-83  
CHEVROLET TRUCK/SUBURBAN  
5" & 2 1/16"



DIRECT FIT 70-78  
PONTIAC FIREBIRD  
3 3/8" & 2 1/16"



panel with gauges <b>7026</b>	panel with gauges <b>7027</b>	panel with gauges <b>7028</b>
panel without gauges <b>2135</b>	panel without gauges <b>2137</b>	panel without gauges <b>2138</b>

DIRECT FIT 70-74  
DODGE "E" BODY  
3 3/8" & 2 1/16"



DIRECT FIT 71-74  
DODGE/PLYMOUTH  
"B" BODY  
3 3/8" & 2 1/16"



panel with gauges <b>7029</b>		panel with gauges <b>7030</b>
panel without gauges <b>2139</b>		panel without gauges <b>2140</b>

DIRECT FIT 82-87  
CHEVROLET MALIBU/EL CAMINO/MONTE CARLO  
5" & 2 5/8"



DIRECT FIT 70-76  
DODGE/PLYMOUTH "A" BODY DUSTER/DEMOM/DART  
3 3/8" & 2 1/16"



DIRECT FIT 67-72  
CHEVROLET TRUCK C-10/C-20/C-30/K-10/  
K-20/K-30/K-5/SUBURBAN  
3 3/8" & 2 1/16"



—	panel with gauges <b>7031</b>	panel with gauges <b>7032</b>
panel without gauges <b>2143</b>	panel without gauges <b>2141</b>	panel without gauges <b>2142</b>

GAUGES NOT INCLUDED WITH AUTO METER DIRECT FIT PRODUCTS.

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

# MOUNTING SOLUTIONS

FORD MUSTANG 65-66  
3 3/8" & 2 1/16"



7035

FORD TRUCK 48-50  
3 1/8" & 2 1/16"



7046

FORD TRUCK 53-55  
3 1/8" & 2 1/16"



7048

FORD TRUCK 53-55  
3 1/8" & 2 1/16"



7042

CHEVY CAR 55-56  
3 1/8" & 2 1/16"



7033

CHEVY CAR 55-56  
3 1/8" & 2 1/16"



7055

CHEVY CAR 51-52  
5" ADAPTER



7038

CHEVY CAR 59-60  
5" ADAPTER



7034

CHEVY BELAIR 55-56  
2 1/16" ADAPTER FOR CLOCK



7058

CAMARO/FIREBIRD 67-68  
5" ADAPTER



7050

CHEVY TRUCK 40-46  
3 1/8" & 2 1/16"



7057

CHEVY TRUCK 47-53  
5" ADAPTER



7039

CHEVY TRUCK 54-55  
5" ADAPTER



7037

CHEVY TRUCK 55-59  
3 1/8" & 2 1/16"



7036

CHEVY TRUCK 55-59  
3 1/8" & 2 1/16"



7049

CHEVY TRUCK 60-63  
3 1/8" & 2 1/16"



7047

CHEVY TRUCK 64-66  
3 1/8" & 2 1/16"



7043

CHEVY TRUCK 64-66  
3 1/8" & 2 1/16"




7044

CHEVY TRUCK 67-72  
5" & 2 5/8"



7045

# MOUNTING SOLUTIONS PODS & PILLARS



GAUGES NOT INCLUDED WITH AUTO METER PODS & PILLARS.

CAR, TRUCK, AND VAN MODELS	DUAL PODS 2 1/16"	SINGLE PODS 2 1/16" 2 3/8"	SINGLE PILLAR 2 1/16"	DUAL PILLAR 2 1/16"	TRIPLE PILLAR 2 1/16"
ACURA INTEGRA, 2 DOOR 90-93	20100	20102	—	—	—
ACURA INTEGRA, 2 DOOR 94-01	20110	20119	—	—	22119
ACURA RSX 02-06	20132	20133	—	—	22133
AUDI A4 96-98	20190	20191	—	—	—
BMW 3 SERIES 93-98, 2DR (E36)	20202	—	—	—	—
BMW 3 SERIES 93-98, 4DR (E36)	20200	20201	—	—	—
CHEVETTE, GTO, LEMANS 68-72	10183	10184	—	—	—
CHEVY ASTRO 95-00	15122	15123	—	—	—
CHEVY BLAZER 94-98	—	—	—	17110	—
CHEVY CAMARO 82-92 (HARD TOP)	10200	10201	—	12200	12201
CHEVY CAMARO 82-92 (T TOP)	10200	10201	—	12202	12203
CHEVY CAMARO 93-02	10210	10211 10212	—	—	—
CHEVY CAMARO 97-02 (T TOP)	10210	10211	—	12212	—
CHEVY CAMARO 10-15 (REPLACEMENT) (HARD TOP ONLY)	—	—	—	12214	—
CHEVY CAVALIER, Z-24 95-02	10204	10205	—	—	—
CHEVY CAVALIER, 03-05	—	—	—	12180	12181
CHEVY COBALT 05-10 (2 Door)	—	—	—	12204	12205
CHEVY CORVETTE 84-96 (C4)	10190	10191	—	—	—
CHEVY CORVETTE 97-02 (C5)	10194	10193	—	12192	—
CHEVY CORVETTE 03-04 (C5)	—	—	—	12193	—
CHEVY CORVETTE 05-09 (C5)	—	—	—	12194	12195
CHEVY/GM, S-10 BLAZER 95-02	15110	15111	—	—	—
CHEVY/GM, FULL SIZE 88-94	15100	15101 15102	—	17100	17101
CHEVY/GM, FULL SIZE 88-98 (ALSO FOR 99 C/K)	—	15101 15102	—	—	—
CHEVY/GM, FULL SIZE 95-98 (ALSO FOR 99 C/K)	15103	15101 15102	—	17102	17103
CHEVY/GM, FS TRUCK/DURAMAX 00-06 & 07 CLASSIC	15104	15105	—	17104	17105
CHEVY/GM, FS TRUCK/DURAMAX 00-06 (W/ SPEAKER), 07 CLASSIC & TAHOE	—	—	—	17106	17107
CHEVY/GM, FS TRUCK/DURAMAX 07-14 (REPLACEMENT)	—	—	—	17115	17116
CHEVY/GM, FS TRUCK/DURAMAX 07-14 (W/ SPEAKER) (REPLACEMENT)	—	—	—	17117	17118
CHEVY/GM, SILVERADO FS TRUCK (GEN 3) 14-15	—	—	17119	17120	17121
CHEVY IMPALA, CAPRICE 92-96	10233	10234 10235	—	—	12234
CHEVY IMPALA, CAPRICE 92-96 (TRIPLE COMBINATION PILLAR)*	—	—	—	—	12235*
CHEVY MONTE CARLO 78-87	10402	10403	—	—	—
CHEVY/GM, S10 PICKUP 94-02	15110	15111	—	—	—
CHEVY S10 PICKUP 86-93	15113	15114	—	17113	17114
CHEVY S10 PICKUP 94-98	—	—	—	17110	—
DODGE CALIBER 07-11 (REPLACEMENT)	—	—	—	12238	12239
DODGE CHALLENGER 08-13	—	—	—	12225	12226
DODGE DAKOTA 00-04	—	—	—	17206	17207
DODGE DART 13+ BLACK	—	—	12208	12209	—
DODGE DART 13+ TAN	—	—	12206	12207	—
DODGE DURANGO, DAKOTA 97-01 (SINGLE POD ONLY)	15206	15207	—	—	—
DODGE MAGNUM/300C 04-06/CHARGER 05-06	—	—	—	12236	—
DODGE MAGNUM/CHARGER/300C 06-08 (BEIGE)	—	—	—	12229	12230
DODGE NEON 94-99	10240	—	—	—	—
DODGE NEON 00-05 (BLACK)	10242	10243	—	12242	12243
DODGE NEON 00-05 (BEIGE)	—	—	—	12240	12241
DODGE RAM 86-93	15198	15199	—	—	—
DODGE RAM 94-97	15200	15201 15202	—	17200	17201
DODGE RAM 98-02 (EXCEPT '02 1500)	15203	15204	—	17202	17203
DODGE RAM WITH SPEAKER 98-02 (EXCEPT 02 1500)	—	—	—	17204	17205
DODGE RAM 03-09 (ALSO FOR '02 1500) (REPLACEMENT) TOUPE	—	—	—	17212	17213
DODGE RAM 03-09 (BEIGE)	—	15213	—	17211†	—
DODGE RAM 03-09 (ALSO FOR '02 1500)	—	15212	—	—	—
DODGE RAM 10+ (REPLACEMENT)	—	—	—	17218	17219
DODGE RAM 10+ (LEATHER TOP ONLY)	—	—	13121	—	—
DODGE RAM 10-12 (EXCEPT LEATHER TOP DASH)	—	—	13117†	—	—
DODGE RAM 13+ (EXCEPT LEATHER TOP DASH)	—	—	13120	—	—
DODGE STEALTH 91-98	20630	20631	—	—	—
DODGE VIPER GTS 96-02	—	—	—	12237	—
ECLIPSE, TALON, LASER 90-94	20600	20601	—	—	—
ECLIPSE, TALON 95-99	20610	20611	—	—	—
HONDA ACCORD, 98-02, 2DR	20405	20406	—	—	—
HONDA, 2 & 3 DOOR ACCORD 94-97	20402	—	20404	—	—
HONDA, 2 & 3 DOOR CIVIC/CRX 88-91, EF	20400	20401	—	—	22401
HONDA, 2 & 3 DOOR CIVIC 92-95 EG	20410	20413 20416	—	22410	22413
HONDA, 2 & 3 DOOR CIVIC 96-00 EK	20428	20431 20434	—	22428	22431

\* NOTE: Triple Combination Pillar has two 2 1/16" gauge holes on top with one 2 5/8" gauge hole at the bottom.

† NOTE: Single Short Pillar has a shortened overall pillar height, and one standard 2 1/16" gauge hole.

GAUGES NOT INCLUDED WITH AUTO METER PODS & PILLARS.



# MOUNTING SOLUTIONS PODS & PILLARS

CAR, TRUCK, AND VAN MODELS	DUAL PODS	SINGLE PODS		SINGLE PILLAR	DUAL PILLAR	TRIPLE PILLAR
	2 1/16"	2 1/16"	2 5/8"	2 1/16"	2 1/16"	2 1/16"
HONDA, 2 DOOR CIVIC 01-05(EXCEPT SI)	20441	20442	—	—	—	22442
HONDA PRELUDE 92-96	20439	20440	—	—	—	—
HONDA PRELUDE 97-01	20436	20437	—	—	—	—
HONDA S2000 00-09	—	20444	—	—	22443	—
HYUNDAI TIBURON 03-04	20240	—	—	—	—	22241
INFINITI G35 02-06	—	—	—	—	22260	22261
JEEP CHEROKEE 88-01 (XJ)	15210	15211	—	—	—	—
JEEP WRANGLER JK 07-10 (REPLACEMENT)	—	—	—	13118	15221	—
JEEP WRANGLER JK 11-15 (REPLACEMENT)	—	—	—	13119	15222	—
MAZDA MIATA 90-98 (MX-5)	20660	20661	—	—	—	—
MAZDA MIATA 99-02 (MX-5)	20662	20663	—	—	—	—
MAZDA MIATA 03-05 (MX-5)	20666	20665	—	—	—	—
MAZDA PROTEGE 00-04	20656	—	—	—	22656	—
MAZDA RX-7 86-92 FC	20670	20671	—	—	—	—
MAZDA RX-7 93-02 FD	20674	20675	—	—	22674	22675
MERCURY MAURADER 03-04	10110	10111	—	—	—	—
MITSUBISHI ECLIPSE, TALON (EXCEPT CONVERT.) 95-99	—	—	—	—	22610	22613
MITSUBISHI EVO 8/9 03-07	20618	20619	—	—	22618	22619
MITSUBISHI 3000GT 91-98	20630	20631	—	—	—	—
MONTE CARLO, SKYLARK 70-72	10183	10184	—	—	—	—
NISSAN 240SX 89-94 S13	—	20805	—	—	—	22805
NISSAN 240SX 95-98 S14	20806	20807	—	—	22806	22807
NISSAN 300ZX 90-96	20800	20801	—	—	22800	22801
NISSAN 350Z 03-08	20808	20809	—	—	22808	22809
NISSAN MAXIMA 95-99	20802	—	—	—	—	22803
NISSAN MAXIMA 00-03	—	—	—	—	—	22813
OLDSMOBILE CUTLASS 78-87	10402	10403	—	—	—	—
PONTIAC GRAND AM 99-04	—	—	—	—	12220	12221
PONTIAC GRAND PRIX 78-87	10402	10403	—	—	—	—
PONTIAC GRAND PRIX 97-03	—	—	—	—	12218	12219
PONTIAC FIREBIRD 82-92 (HARD TOP)	10200	10201	—	—	12200	12201
PONTIAC FIREBIRD 82-92 (T TOP)	10200	10201	—	—	12202	12203
PONTIAC FIREBIRD 93-02 (HARD TOP)	10210	10211	10212	—	—	—
PONTIAC FIREBIRD 93-02 (T TOP)	10210	10211	10212	—	12212	—
SCION TC 05-09	—	—	—	—	22685	22686
SUBARU IMPREZA 93-00 GC8	20590	20591	—	—	—	—
SUBARU IMPREZA, WRX, & STI 01-07 (SEDAN) (GD)	20592	20593	—	—	22592	22593
TOYOTA LAND CRUISER 92-97	—	15413	—	—	—	—
TOYOTA LAND CRUISER 98-00	—	15414	—	—	—	—
TOYOTA MR-2 90-99	20680	20681	—	—	—	—
TOYOTA CELICA 00-05	20694	20695	—	—	—	—
TOYOTA SUPRA 93-02	20690	—	—	—	—	—
TOYOTA TACOMA & 96-00 4RUNNER 95-00	—	15411	—	—	—	—
TOYOTA TACOMA 01-04	—	15415	—	—	—	—
VOLKSWAGEN BEETLE 99-10 W/SPEAKER	—	—	—	—	22190	—
VOLKSWAGEN GOLF 99-05	20852	20853	—	—	—	—
VOLKSWAGEN GOLF/JETTA 93-98	20850	20851	—	—	—	—
VOLKSWAGEN PASSAT 98-05	20846	20847	—	—	—	—

## RIGHT HAND DRIVE PODS & PILLARS CAR & TRUCK MODELS

CAR & TRUCK MODELS	DUAL PODS 2 1/16"
HONDA CIVIC 92-95 EG (RIGHT HAND DRIVE)	23410
MAZDA RX7 93-02 FD (RIGHT HAND DRIVE)	23674
NISSAN 240SX 89-94 S13 (RIGHT HAND DRIVE)	23900
NISSAN 240SX 95-98 S14 (RIGHT HAND DRIVE)	23902
NISSAN 300ZX 90-96 (RIGHT HAND DRIVE)	23800
NISSAN SKYLINE R32 91-94 (RIGHT HAND DRIVE)	23904
NISSAN SKYLINE R33 95-98 (RIGHT HAND DRIVE)	23906
TOYOTA MR2 90-99 (RIGHT HAND DRIVE)	23680
TOYOTA SUPRA 93-02 (RIGHT HAND DRIVE)	23690

# FORD MOUNTING SOLUTIONS, PODS, PILLARS & PANELS

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

FORD CAR, TRUCK, AND VAN MODELS	DUAL PODS		SINGLE PODS		SINGLE PILLAR	DUAL PILLAR		TRIPLE PILLAR		QUAD PILLAR
	2 1/16"	2 5/8"	2 1/16"	2 5/8"	2 1/16"	2 1/16"	2 5/8"	2 1/16"	2 5/8"	2 1/16"
FORD ECONOLINE 03-08	—	—	—	—	—	17319	—	17320	—	—
FORD EXPLORER 95-99	15308	—	15309	—	—	—	—	—	—	—
FORD FOCUS 00-01	10104	—	10105	—	—	—	—	12107	—	—
FORD FOCUS 02-04	—	—	—	—	—	12108	—	12109	—	—
FORD F SERIES 87-97 (EXCEPT '97 F-150)	15300	—	15301	15302	—	—	—	—	—	—
FORD F SERIES 92-97 (EXCEPT '97 F-150)	15300	—	15301	15302	—	17302	—	17303	—	—
FORD F SERIES 04-05	—	—	15313	—	—	—	—	—	—	—
FORD F-150 & EXPEDITION 98-03 (ALSO FOR 1997 F-150)	15303	—	15304	15305	—	—	—	—	—	—
FORD F-150 97-01 & 02 HARLEY EDITION	15303	—	15304	15305	—	17304	—	17305	—	—
FORD F-150 02-03	—	—	—	—	—	17310	—	17311	—	—
FORD F-150 04-08	15312	—	15313	—	—	—	—	—	—	—
FORD F-150 04-08 (REPLACEMENT)	—	—	—	—	—	17317	—	17318	—	—
FORD F-150 W/ SPEAKER 09-14 (REPLACEMENT)	—	—	—	—	17325	17327	—	17329	—	—
FORD F-150 W/O SPEAKER 09-14 (REPLACEMENT)	—	—	—	—	17324	17326	—	17328	—	—
FORD MUSTANG 79-93 (FOX)	10100	10103	10101	10102	—	—	—	—	—	—
FORD MUSTANG 87-93 (HARD TOP) (FOX)	—	—	—	—	—	12100	12102	12101	12103	—
FORD MUSTANG 94-02 (HARD TOP) (SN95)	10120	—	10121	—	—	12120	—	12121	—	—
FORD MUSTANG 94-08 (CONVERTIBLE) (SN95)	10125	—	10126	—	—	—	—	—	—	—
FORD MUSTANG 01-04 (CONVERTIBLE) (SN95)	—	—	—	—	—	12125	—	12126	—	—
FORD MUSTANG 03-04 (HARD TOP) (SN95)	10122	—	10123	—	—	12122	—	12123	—	—
FORD MUSTANG 05-09 (HARD TOP) (S197)	—	—	—	—	—	12127	—	12128	—	—
FORD MUSTANG 05-09 (CONVERTIBLE) (S197)	—	—	—	—	—	12129	—	12130	—	—
FORD MUSTANG (HARD TOP) 10-14	—	—	10129	—	—	12131	—	12132	—	—
FORD MUSTANG (HARD TOP) 10-14 (REPLACEMENT)	—	—	—	—	—	12133	—	12134	—	—
FORD PROBE 93-97	—	—	—	—	—	12104	—	12105	—	—
FORD RANGER 93-02	15308	—	15309	—	—	—	—	—	—	—
FORD SUPER DUTY 99-02 & EXCURSION	15306	—	15307	—	—	17306	—	17307	—	17308
FORD SUPER DUTY 03-07 W/O HANDLE	—	—	—	—	15319†	—	—	—	—	—
FORD SUPER DUTY 03-07 & EXCURSION	—	—	15318	—	—	17306	—	17307	—	17308
FORD SUPER DUTY 08-10	—	—	15314†	—	—	—	—	—	—	—
FORD SUPER DUTY 08-10 (REPLACEMENT)	—	—	—	—	—	17312	—	17313	—	—
FORD SUPER DUTY 11+ (REPLACEMENT)	—	—	—	—	17321	17322	—	17323	—	—
FORD THUNDERBIRD 89-93	10116	—	—	—	—	—	—	—	—	—
FORD THUNDERBIRD 94-97	10118	—	—	—	—	—	—	—	—	—
FORD VAN 92-02	15315	—	15316	15317	—	17315	—	17316	—	—
FORD VAN, E-SERIES 03-08	—	—	15320	—	—	17319	—	17320	—	—



10008



10010

(SN95) MUSTANG RACE PANELS (GAUGES NOT INCLUDED)

CAR & TRUCK MODELS	INCLUDES/DETAILS	MODEL NUMBER
MUSTANG 94-04 (REPLACES ORIGINAL CLUSTER)	HOLDS TWO 3 3/8" INSTRUMENTS AND FOUR 2 1/16" GAUGES. '99 & NEWER MODELS REQUIRE DEACTIVATION OF PASSIVE ANTI THEFT SYSTEM.	10008
MUSTANG 94-04 (REPLACES ORIGINAL CLUSTER)	HOLDS ONE 5" INSTRUMENT AND FOUR 2 5/8" GAUGES. '99 & NEWER MODELS REQUIRE DEACTIVATION OF PASSIVE ANTI THEFT SYSTEM.	10010



GAUGE CAGES - REPLACES CENTRAL HVAC VENTS



(GAUGES NOT INCLUDED)

CAR MODELS	COLOR	DUAL CAGE	DUAL CAGE (WITH VENTS)	TRIPLE CAGE
FORD MUSTANG 87-93 (FOX)	BLACK	2 5/8"	2 5/8"	2 5/8"
		50102	50101	50100

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

# DIRECT FIT MOUNTING SOLUTIONS

**JEEP JK PILLAR KIT 11-15**

SPORT-COMP II GAUGES INCLUDED

SHORT SWEEP ELECTRIC TRANSMISSION TEMPERATURE 100-250 F, SHORT SWEEP ELECTRIC OIL PRESSURE 0-100 PSI



**7041**

**JEEP WRANGLER YJ 87-95**

REPLACES FACTORY BEZEL & FACTORY GAUGES MUST BE REPLACED. (FOR 3 3/8" TACH & SPEEDO) **15220**



**JEEP YJ KIT 87-95**

**7040** (FOR 3 3/8" TACH & SPEEDO & 2 1/16" GAUGES)



(JEEP SERIES GAUGES INCLUDED)



**JEEP WRANGLER YJ 87-95**

REPLACES FACTORY BEZEL & FACTORY GAUGES MUST BE REPLACED. ANGLES GAUGES TOWARD DRIVER FOR ENHANCED VIEWING. (FOR 2 1/16" GAUGES) **15218**



**JEEP WRANGLER TJ 97-06 5381**

**DIRECT FIT CHEVY TRUCK 55-59** (FOR 3 3/8" SPEEDO & 2 1/16" GAUGES) **2208**

(INCLUDES BLACK FACEPLATE)



ASSEMBLED



**2125** OPTIONAL CARBON FIBER LOOK FACEPLATE



**2124** OPTIONAL SILVER CARBON FIBER LOOK FACEPLATE

**DIRECT FIT CHEVY BEL AIR 55-56** (FOR 3 3/8" SPEEDO & 2 1/16" GAUGES) **2207**

(INCLUDES BLACK FACEPLATE)



ASSEMBLED



**2123** OPTIONAL CARBON FIBER LOOK FACEPLATE



**2122** OPTIONAL SILVER CARBON FIBER LOOK FACEPLATE

CAR AND TRUCK MODELS	GAUGE HOLE SIZES	DIRECT FIT PANELS
CHEVROLET CAMARO 69	5" & 2 1/16"	2131
CHEVROLET CAMARO 70-78	3 3/8" & 2 1/16"	2132
CHEVROLET CAMARO 79-81	3 3/8" & 2 1/16"	2133
CHEVROLET NOVA 69-75	5" & 2 1/16"	2134
CHEVROLET CHEVELLE SS/CAMINO SS/MONTE CARLO SS 70-72	3 3/8" & 2 1/16"	2135
CHEVROLET/CHEVELLE/EL CAMINO/MALIBU 70-72	3 3/8" & 2 1/16"	2136
CHEVROLET/PONTIAC CAMARO/FIREBIRD 67-68	3 3/8" & 2 1/16"	2130
CHEVROLET TRUCK SUBURBAN 73-83	5" & 2 1/16"	2137
CHEVY BEL AIR 55-56	3 3/8" & 2 1/16"	2207
CHEVY MALIBU/EL CAMINO/MONTE CARLO	5" & 2 5/8"	2143
CHEVY TRUCK 55-59	3 3/8" & 2 1/16"	2208
CHEVY TRUCK C-10/C-20/C-30/K-10/K-20/K-30/K-5 SUBURBAN 67-72	3 3/8" & 2 1/16"	2142
DODGE "E" BODY 70-74	3 3/8" & 2 1/16"	2139
DODGE/PLYMOUTH "A" BODY DUSTER/DEMON/DART 70-76	3 3/8" & 2 1/16"	2141
DODGE/PLYMOUTH "B" BODY 71-74	3 3/8" & 2 1/16"	2140
JEEP WRANGLER YJ 87-95	3 3/8"	15220
JEEP WRANGLER YJ 87-95	2 1/16"	15218
JEEP WRANGLER YJ KIT 87-95 (GAUGES INCLUDED)	3 3/8" & 2 1/16"	7040
JEEP WRANGLER TJ 97-06	3 3/8" & 2 1/16"	5381
PONTIAC FIREBIRD 70-78	3 3/8" & 2 1/16"	2138
PONTIAC FIREBIRD 70-78	3 3/8" & 2 1/16"	12201

# MOUNTING SOLUTIONS

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

GAUGES NOT INCLUDED.

MITSUBISHI EVO 8 03-07  
20026



MITSUBISHI EVO 8 03-07  
20029



SUBARU WRX  
02-07  
20032



HUMMER H2 02-06  
DUAL DASH POD  
15022



GOLF/  
JETTA  
99-05  
20020



GOLF/  
JETTA  
99-05  
20019

15016



15003

15018

99-04 FORD SUPER DUTY



JEEP WRANGLER  
TJ 97-06  
MOUNTS TWO  
2 1/16" GAUGES  
ABOVE HVAC  
VENTS. ADDITIONAL  
SWITCH MOUNTING  
SPACE PROVIDED.  
IDEAL FOR  
MOUNTING TRANS  
TEMP, AIR PRESS, OR  
DIFF. TEMP. GAUGES  
15219



CAMARO 68-69/  
NOVA 68-74  
10002

## LATE MODEL MOUNTING SOLUTIONS

GAUGES NOT INCLUDED WITH PODS

### 5th GEN CAMARO CONSOLE POD



5286



JEEP JK 07-10  
5380



5287 & 5285



05-09 MUSTANG  
10050



DODGE RAM 03-09  
DASH POD  
15020

### LATE MODEL MOUNTING SOLUTIONS

	DESCRIPTION	MODEL #
CHALLENGER 3 GAUGE DASH POD	DIRECT FIT MOUNT ABOVE CENTER STACK ON DASH FOR 2 1/16" GAUGES	5287
CAMARO CONSOLE POD	DIRECT FIT FOR 2010-2015 CAMARO, HOLDS MOST 2-1/16" ELEC AUTO METER GAUGES	5286
SCION FRS/SUBARU BRZ 12+	FOR USE WITH AUTO METER 2 1/16" GAUGES	5285

GAUGE POD DIMENSIONS			
MODEL #	HEIGHT	WIDTH	DEPTH
5287	3.25"	8.4"	4.46"



GAUGES NOT INCLUDED.



# MOUNTING SOLUTIONS

## INSTRUMENT CLUSTER BEZELS & TRIPLE GLOVE BOX MOUNT

CAR & TRUCK MODELS	LOCATION	INCLUDES/DETAILS	MODEL #
FORD MUSTANG 94-00 (SN95)	INSTRUMENT CLUSTER BEZEL	FOR USE WITH TWO AUTO METER 2 1/16" GAUGES	10003
FORD MUSTANG 01-04 (SN95)		FOR USE WITH TWO AUTO METER 2 1/16" GAUGES	10005
FORD SUPER DUTY 99-04		FOR USE WITH TWO AUTO METER 2 1/16" GAUGES	15003
SUBARU IMPREZA, WRX & STI 02-07	GLOVE BOX	FOR USE WITH AUTO METER 2 1/16" GAUGES. INCLUDES OPTIONAL 'CUT OUTS' FOR TURBO TIMERS AND CONTROLLERS.	20032

## STEERING COLUMN & CONSOLE PODS

CAR & TRUCK MODELS	LOCATION	INCLUDES/DETAILS	SINGLE PODS	DUAL PODS	TRIPLE POD	QUAD POD
			2 1/16"	2 1/16"	2 1/16"	2 1/16"
ACURA RSX 02-04	STEERING COLUMN	FITS OVER STEERING COLUMN. FOR USE WITH AUTO METER 2 1/16" GAUGES	20016	—	—	—
CAMARO FACTORY CONSOLE 68-69	LOWER	MOUNTS FOUR 2 1/16" GAUGES IN THE FACTORY SHIFTER CONSOLE	—	—	—	10002
COBALT 05-10	STEERING COLUMN	FITS OVER STEERING COLUMN. FOR USE WITH AUTO METER 2 1/16" GAUGES	10020	—	—	—
CHEVY/GM, FS TRUCK/DURAMAX 99-02 (AUTOMATIC)	STEERING COLUMN		15007	—	—	—
CHEVY/GM, FS TRUCK/DURAMAX 99-02 (MANUAL)			15008	—	—	—
CHEVY/GM, FS TRUCK/DURAMAX 07-13 (AUTOMATIC)			15023	—	—	—
CHEVY NOVA FACTORY CONSOLE 68-74	LOWER	MOUNTS FOUR 2 1/16" GAUGES IN THE FACTORY SHIFTER CONSOLE	—	—	—	10002
DODGE RAM 94-02 (EXCEPT 02 1500)	STEERING COLUMN	FITS OVER STEERING COLUMN. FOR USE WITH AUTO METER 2 1/16" GAUGES	15012	—	—	—
DODGE RAM 03-05	CENTER	FOR USE WITH AUTO METER 2 1/16" GAUGES	—	—	—	15021
DODGE RAM 03-09 (ALSO FOR 02 1500)	STEERING COLUMN	FITS OVER STEERING COLUMN. FOR USE WITH AUTO METER 2 1/16" GAUGES	15013	15014	—	—
DODGE VIPER 96-02			10006	—	—	—
FORD F-150 97-01 (AUTOMATIC)			15004	—	—	—
FORD F-150 09-14 (FLOOR SHIFT)			15006	—	—	—
FORD F-150 09-14 (COLUMN SHIFT)			15027	—	—	—
FORD MUSTANG 94-04 (SN95)	STEERING COLUMN	FITS OVER STEERING COLUMN AND HOLDS A SINGLE 2 1/16" AUTO METER GAUGE	10004	—	—	—
FORD SUPER DUTY 99-07 (AUTOMATIC)	STEERING COLUMN	FITS OVER STEERING COLUMN. FOR USE WITH AUTO METER 2 1/16" GAUGES	15010	—	—	—
FORD SUPER DUTY 11-14 (AUTOMATIC)			15026	—	—	—
FORD SUPER DUTY 99-04 (MANUAL)			15011	—	—	—
FORD SUPER DUTY 99-06	LOWER	FOR USE WITH AUTO METER 2 1/16" GAUGES	—	—	15018	—
MAZDA 3 03-08			20033	20034	—	—
MINI COOPER 03-07	STEERING COLUMN	FITS OVER STEERING COLUMN. FOR USE WITH AUTO METER 2 1/16" GAUGES	20023	20024	—	—
MITSUBISHI EVO 8 03-07	UPPER	FOR USE WITH AUTO METER 2 1/16" GAUGES	—	—	20026	—
MITSUBISHI EVO 8 03-07	LOWER		—	—	20029	—
PORSCHE BOXSTER 97-04 986	STEERING COLUMN	FITS OVER STEERING COLUMN. FOR USE WITH AUTO METER 2 1/16" GAUGES	20013	—	—	—
PORSCHE 911 99-04 996			20013	—	—	—
VOLKSWAGON GOLF/JETTA 99-05			20019	20020	—	—
VOLKSWAGON PASSAT 99-05			20021	20022	—	—

## TACH DASH & DASH PODS



CAR & TRUCK MODELS	INCLUDES/DETAILS	SINGLE PODS	DUAL PODS	TRIPLE PODS	5 GAUGE PODS	TACH PODS
		2 1/16"	2 1/16"	2 1/16"	2 1/16"	5"
DODGE RAM 98-02 (EXCEPT 02 1500)	FOR USE WITH AUTO METER 2 1/16" GAUGES	—	—	15002	—	—
DODGE RAM 03-09	FOR USE WITH AUTO METER 2 1/16" GAUGES	—	15019	15020	—	—
FORD MUSTANG 87-93 (FOX)	FOR USE WITH 5" AUTO METER TACHS WITH 3 3/8" CASE AND 2 5/8" GAUGES	—	—	—	—	49102
FORD MUSTANG 94-04 (SN95)	REPLACES CLOCK ON 94-98 MODELS. HOLDS 2 AUTO METER 2 1/16" GAUGES	—	10001	—	—	—
FORD MUSTANG 05-09 (BLACK) (S197)	MOUNTS 3 AUTO METER 2 1/16" GAUGES IN CENTER OF DASH	—	—	10050	—	—
FORD SUPER DUTY 99-04	FOR USE WITH AUTO METER 2 1/16" GAUGES	—	—	15016	—	—
FORD SUPER DUTY 08-12	FOR USE WITH AUTO METER 2 1/16" GAUGES	15025	—	—	—	—
HONDA CIVIC 92-95, EG	FOR USE WITH 5" AUTO METER TACHS WITH 3 3/8" CASE AND 2 5/8" GAUGES	—	—	—	—	49202
HUMMER H2	FOR USE WITH AUTO METER 2 1/16" GAUGES	—	15022	—	—	—
JEEP WRANGLER TJ 97-06	FOR USE WITH AUTO METER 2 1/16" GAUGES	—	15219	—	—	—
JEEP WRANGLER YJ DUAL CLUSTER BEZEL 87-95	REPLACES FACTORY DASH BEZEL ON YJ JEEPS, ALLOWING FITMENT OF TWO 3 3/8" AUTO METER INSTRUMENTS	—	15220	—	—	—
JEEP WRANGLER YJ REPLACEMENT BEZEL 87-95	FOR USE WITH AUTO METER 2 1/16" GAUGES. REPLACES FACTORY BEZEL AND FACTORY GAUGES MUST BE REPLACED.	—	—	—	15218	—
JEEP JK 07-10	FOR USE WITH AUTO METER 2 1/16" GAUGES	—	—	5380	—	—
SCION FRS/SUBARU BRZ 12-14	FOR USE WITH AUTO METER 2 1/16" GAUGES	—	—	5285	—	—
SUBARU IMPREZA, WRX & STI 02-07	FOR USE WITH AUTO METER 2 1/16" GAUGES	—	—	20018	—	—
VOLKSWAGON BEETLE 98-10	FOR USE WITH AUTO METER 2 1/16" GAUGES	—	—	20009	—	—

# MOUNTING SOLUTIONS

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

GAUGES NOT INCLUDED WITH AUTO METER UNIVERSAL MOUNTING SOLUTIONS.

## PANELS

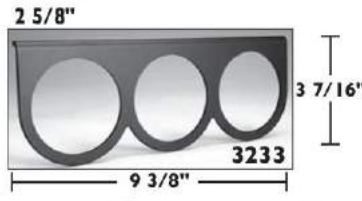

## 5" PEDESTAL MOUNT SHOCK STRAP KIT



## MOUNTING CUPS



## GAUGE AND TACHOMETER PEDESTAL MOUNT

GAUGES		TACHOMETER
2 1/16"	2 5/8"	
48009	—	48011
—	48010	



GAUGE POD DIMENSIONS			
MODEL #	HEIGHT	WIDTH	DEPTH
5288	3.25"	8.4"	4.46"

PANELS	COLOR	INCLUDES/DETAILS	2 1/16"	2 5/8"
1 HOLE PANEL	BLACK	FOR USE WITH ALL AUTO METER & AUTO GAGE GAUGES	2236	3231
2 HOLE PANEL	BLACK	FOR USE WITH ALL AUTO METER & AUTO GAGE GAUGES	2237	3232
3 HOLE PANEL	BLACK	FOR USE WITH ALL AUTO METER & AUTO GAGE GAUGES	2238	3233
GAUGE POD	COLOR	INCLUDES/DETAILS		
3 HOLE DASH POD FOR 2 1/16" GAUGES	BLACK	REVERSIBLE FACEPLATE, CAN BE MOUNTED W/ INCLUDED HARDWARE OR DOUBLE FACE TAPE	5288	

PANEL DIMENSIONS		
MODEL #	HEIGHT	WIDTH
2236	2-15/16"	2-1/2"
2237	2-15/16"	5"
2238	2-15/16"	7-1/2"
3231	3-7/16"	3-1/16"
3232	3-7/16"	6-1/8"
3233	3-7/16"	9-3/8"

## MOUNTING CUPS

TYPE OF GAUGE	INCLUDES/DETAILS	BLACK			CHROME			CARBON FIBER		
		2 1/16"	2 5/8"	3 3/8"	2 1/16"	2 5/8"	3 3/8"	2 1/16"	2 5/8"	5"
AUTOGAGE	FOR USE WITH ALL 2 1/16" AUTO GAGE GAUGES	2204	—	—	2203	—	—	2121	—	—
AUTO METER	3201 & 3202 ARE FOR USE WITH AUTO METER 2 5/8" ELECTRIC GAUGES ONLY	2204	3202	—	2203	3201	—	2121	—	—
AUTO METER ELECTRIC	FOR USE WITH AUTO METER 2 5/8" ELECTRIC GAUGES ONLY	—	—	—	—	—	—	—	2151	—
AUTO METER MECHANICAL	FOR USE WITH AUTO METER 2 5/8" MECHANICAL GAUGES ONLY	—	—	—	—	—	—	—	2152	—
AUTO METER MECH. TEMP.	FOR USE WITH AUTO METER 2 5/8" MECHANICAL TEMP. GAUGES ONLY	—	3204	—	—	3203	—	—	—	—
AUTO METER PRESSURE	FOR USE WITH AUTO METER 2 5/8" MECHANICAL PRESSURE GAUGES ONLY	—	3204	—	—	3203	—	—	—	—
IN DASH TACHS & SPEEDOS	FOR USE WITH 3 3/8" IN DASH TACHS & ELECTRIC SPEEDOS	—	—	5204	—	—	5203	—	—	—
PEDESTAL MOUNT	FOR 5" PEDESTAL MOUNT TACHOMETERS WITH 3 3/8" CASE	—	—	—	—	—	—	—	—	2155
PRO-COMP LIQUID FILLED	FOR USE WITH PRESSURE & TEMP. GAUGES (EXCEPT BRAKE PRESSURE)	—	5202	—	—	5201	—	—	—	—

GAUGES NOT INCLUDED WITH PODS

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

# MOUNTING SOLUTIONS

## ROLL PODS

	GAUGES		FOR FACTORY PEDESTAL MOUNT TACHOMETER
	2 1/16"	2 5/8"	
1 1/2" ROLL CAGE	48000	48001	48002
1 5/8" ROLL CAGE	48003	48004	48005
1 3/4" ROLL CAGE	48006	48007	48008



## GAUGE MOBILE SUCTION MOUNT

2 1/16" MOBILE SUCTION MOUNT FOR AUTO METER ELECTRIC GAUGES (INCLUDES 12V POWER PLUG HARNESS)

### MODEL NUMBER

5231



## OVERHEAD CONSOLE PODS

CAR & TRUCK MODELS	DUAL PODS	TRIPLE PODS	QUAD PODS
	2 1/16"	2 1/16"	2 1/16"
GM FULLSIZE 00-06 (+07 CLASSIC)	18022	18023	18024
DODGE RAM 03-08	18016	18017	18018
FORD SUPER DUTY 99-04	18016	18017	18018
SUBARU IMPREZZA WRX/STI 08-13	20007	—	—

(18016, 18017, AND 18018 FIT BOTH FORD AND DODGE)

DODGE RAM 03-08 DASH POD  
**18017**



**TRANS. TEMP.** - Measure transmission temperature to avoid clutch burn out, plate slippage, and premature seal failure.



**PYROMETER** - Measures your EGT (Exhaust Gas Temperature) to monitor engine load and lets you know if you've been hauling too long or too hard.



**BOOST** - Measure engine boost to keep you in the powerband. A must for turbo charged engines.

## DIESEL TRUCK & FACTORY MATCH DIESEL PILLAR KITS (INCLUDES GAUGES)

TRUCK MODELS	ULTRA-LITE (silver)			Z-SERIES (black)			PHANTOM (white)			FACTORY MATCH PILLARS		FACTORY MATCH PILLARS W SPEAKER HOLE	
	A-PILLAR			A-PILLAR			A-PILLAR			DUAL	TRIPLE	DUAL	TRIPLE
	SINGLE	DUAL	TRIPLE	SINGLE	DUAL	TRIPLE	SINGLE	DUAL	TRIPLE				
DODGE RAM KITS 98-02 (W FACTORY SPEAKER HOLE)	7093	7094	7095	7090	7091	7092	—	—	—	—	—	—	—
DODGE RAM KITS 03-09 (TAUPE)	—	—	—	—	—	—	—	7097	7098	—	—	—	—
DODGE RAM FACTORY MATCH PILLAR 03-09	—	—	—	—	—	—	—	—	—	7096	7099	—	—
DODGE RAM FACTORY MATCH PILLAR 10-14	—	—	—	—	—	—	—	—	—	7082	7089	—	—
FORD POWERSTROKE/SD KITS 99-02	7073	7074	7075	7070	7071	7072	—	—	—	—	—	—	—
FORD POWERSTROKE/SD KITS 03-07	—	7074	7075	—	7071	7072	—	—	—	—	—	—	—
FORD SUPER DUTY FACTORY MATCH PILLAR 99-07	—	—	—	—	—	—	—	—	—	7076	7077	—	—
GM DURAMAX KITS 00-06	7083	7084	—	7080	7081	—	—	—	—	—	—	—	—
GM DURAMAX FACTORY MATCH PILLAR 00-06	—	—	—	—	—	—	—	—	—	7085	7086	7088	7087

**NOTE:** Single Pillar includes Transmission Temperature gauge. Dual Pillar includes Boost and Pyrometer gauge. Triple Pillar includes Boost, Pyrometer and Transmission Temperature gauge. (Dual and Triple Pillars for Dodge Ram include hole for speaker) Trans.Temp and Illumination wire not included. Single Pillar is not full length.

# DIGITAL PRO SHIFTS SHIFT-LITES WARNING LIGHTS

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

BLACK TUBE LEVEL 1-3



SILVER TUBE LEVEL 1-3



6187, 6188



7187, 7188



5787, 5788



PLAYBACK BOX/ RPM SWITCH



DPSS TECHNOLOGY LEVELS						
Level	Shift Points	Launch Light	Progressive Shift & Launch	LED Color Option	Memory	Play Back
1	1	N	N	1	Peak	N
2	4	Y	Y	7	Peak	N
3	4	Y	Y	7	80 sec. & Peak	Y

12 LED SUPER-LITE™



12 LED SUPER-LITE™



SHIFT-LITE™



QUICK-LITE SHIFT-LITE  
CHROME, BLACK (SHOWN), & SILVER




SHIFT-LITE™



PRO-LITE®



Note: Requires a Temperature or Pressure Switch to Activate



RACE ONLY  
MINI SHIFT LITE  
ROLL BAR MOUNT




RACE ONLY  
MINI SHIFT LITE  
PEDESTAL MOUNT



Red LED's

**PRO-LITE Specifications**  
It is recommended that the Pro-Lite be used in conjunction with a gauge to give first alert to potential problems.



SHIFT & WARNING LIGHT CURRENT DRAW (WHEN LIT)	
LIGHT TYPE	CURRENT DRAW AMPERAGE
Quick-Lite	115 mA
Shift-Lite	1.4 A
Super-Lite	95 mA (Low), 135 mA (Med), 200 mA (Hi)
Mini Pro-Lite	265 mA
Pro-Lite	1.4 A

BLUE LENS KIT



RED LENS KIT



YELLOW LENS KIT



MINI PRO-LITE®  
COVER KIT



MINI PRO-LITE® WARNING LITE



MINI PRO-LITE® WARNING LITE



Note: Requires a Temperature or Pressure Switch to Activate



# DIGITAL PRO SHIFTS SHIFT-LITES WARNING LIGHTS

2 1/16" DIGITAL PRO-SHIFT GAUGES (DPSS) (FOR CUP, IN-DASH OR POD MOUNTING)		INFO	MODEL #
COBALT		LEVEL 1: BLUE LED DISPLAY AND SHIFT LIGHT.	6187*
COBALT		LEVEL 2: LAUNCH LIGHT, 5 STAGE SHIFT LIGHT, MULTI COLOR LED SHIFT.	6188*
C2		LEVEL 1: BLUE LED DISPLAY AND SHIFT LIGHT.	7187*
C2		LEVEL 2: LAUNCH LIGHT, 5 STAGE SHIFT LIGHT, MULTI COLOR LED SHIFT.	7188*
NV		LEVEL 1: GREEN LED DISPLAY AND SHIFT LIGHT.	7387*
NV		LEVEL 2: LAUNCH LIGHT, 5 STAGE SHIFT LIGHT, MULTI COLOR LED SHIFT.	7388*
PHANTOM (ALSO MATCHES PHANTOM II)		LEVEL 1: RED LED DISPLAY AND AMBER SHIFT LIGHT.	5787*
PHANTOM (ALSO MATCHES PHANTOM II)		LEVEL 2: LAUNCH LIGHT, 5 STAGE SHIFT LIGHT, MULTI COLOR LED SHIFT.	5788*
SPORT-COMP (ALSO MATCHES SPORT-COMP II)		LEVEL 1: RED LED DISPLAY AND AMBER SHIFT LIGHT.	3387*
SPORT-COMP (ALSO MATCHES SPORT-COMP II)		LEVEL 2: LAUNCH LIGHT, 5 STAGE SHIFT LIGHT, MULTI COLOR LED SHIFT.	3388*
SPORT-COMP (ALSO MATCHES SPORT-COMP II)		LEVEL 3: LAUNCH, 5 STAGE, MULTI COLOR, AND PLAYBACK. PROGRESSIVE SHIFT.	3389*
ULTRA-LITE (ALSO MATCHES ULTRA-LITE II)		LEVEL 1: RED LED DISPLAY AND AMBER SHIFT LIGHT.	4387*
ULTRA-LITE (ALSO MATCHES ULTRA-LITE II)		LEVEL 2: LAUNCH LIGHT, 5 STAGE SHIFT LIGHT, MULTI COLOR LED SHIFT.	4388*
ULTRA-LITE (ALSO MATCHES ULTRA-LITE II)		LEVEL 3: LAUNCH, 5 STAGE, MULTI COLOR, AND PLAYBACK. PROGRESSIVE SHIFT.	4389*

DIGITAL PRO-SHIFT MODULES (DPSS)		INFO	MODEL #
RPM SWITCH		LEVEL 1: SINGLE STAGE RPM SWITCH.	5312*
RPM SWITCH		LEVEL 2: LAUNCH LIGHT, 5 STAGE SHIFT LIGHT.	5313*
PLAYBACK BOX		LEVEL 3: LAUNCH LIGHT, 5 STAGE RPM SWITCH, PLAYBACK.	5314*

DIGITAL PRO-SHIFT SHIFT-LITES (DPSS)		INFO	MODEL #
BLACK TUBE		LEVEL 1: AMBER LED DISPLAY AND SHIFT LIGHT.	5343*
BLACK TUBE		LEVEL 2: LAUNCH LIGHT, 5 STAGE SHIFT LIGHT, MULTI COLOR LED SHIFT.	5348*
BLACK TUBE		LEVEL 3: LAUNCH, 5 STAGE, MULTI COLOR, AND PLAYBACK. PROGRESSIVE SHIFT.	5350*
SILVER TUBE		LEVEL 1: AMBER LED DISPLAY AND SHIFT LIGHT.	5344*
SILVER TUBE		LEVEL 2: LAUNCH LIGHT, 5 STAGE SHIFT LIGHT, MULTI COLOR LED SHIFT.	5349*
SILVER TUBE		LEVEL 3: LAUNCH, 5 STAGE, MULTI COLOR, AND PLAYBACK. PROGRESSIVE SHIFT.	5351*

SHIFT-LITES	COLOR	INFO	MODEL #
12 LED SUPER-LITE™	BLACK	DIRECT REPLACEMENT FOR EXISTING AUTO METER SHIFT-LITES. CAN ALSO BE ACTIVATED WITH DIGITAL PRO-SHIFT MODULES/PLAYBACK BOX. (CANNOT BE USED AS STAND ALONE)	5332
12 LED SUPER-LITE™	SILVER		5333
QUICK-LITE SHIFT-LITE	BLACK	DIRECT REPLACEMENT FOR EXISTING AUTO METER SHIFT-LITES. CAN ALSO BE ACTIVATED WITH DIGITAL PRO-SHIFT MODULES/PLAYBACK BOX. AMBER LED. (CANNOT BE USED AS STAND ALONE)	5330
QUICK-LITE SHIFT-LITE	CHROME		5329
QUICK-LITE SHIFT-LITE	SILVER		5331
SHIFT-LITE	BLACK	REPLACEMENT INCANDESCENT SHIFT LIGHT. INCLUDES AMBER LENS AND YELLOW NIGHT COVER. (CAN NOT BE USED AS STAND ALONE)	5334
SHIFT-LITE	SILVER		5335
MINI SHIFT-LITE (RACE ONLY)	BLACK	1-3/4" ROLL BAR MOUNT. RPM SIGNAL GENERATOR REQUIRED FOR PROGRAMMING. OVER REV INDICATION	5320
MINI SHIFT-LITE (RACE ONLY)	BLACK	PEDESTAL MOUNT. RPM SIGNAL GENERATOR REQUIRED FOR PROGRAMMING. OVER REV INDICATION	5321

WARNING-LITES & LENS KITS RANGE		INFO	MODEL #
LENS KIT BLUE		INCLUDES LENS & NIGHT COVER. WORKS WITH 3240 AND ALL NON LED LARGE SHIFT LITES.	3250
LENS KIT RED			3252
LENS KIT YELLOW			3251
MINI PRO-LITE® COVER KIT		INCLUDES BLUE, YELLOW, AND RED BOOTS AND NIGHT COVERS	3254
MINI PRO-LITE® WARNING LITE	SILVER	INCANDESCENT BULB. INCLUDES BLUE, RED, & YELLOW BULB BOOTS & NIGHT COVERS. PRESSURE OR TEMP SWITCH REQUIRED	3238
MINI PRO-LITE® WARNING LITE	BLACK		3239
PRESSURE SWITCH	18 PSI	1/8" NPT	3241
PRESSURE SWITCH	30 PSI		3242
PRESSURE SWITCH	50 PSI		3243
PRO-LITE® WARNING LITE		BLACK CASE, RED LENS AND RED NIGHT COVER. SWITCH REQUIRED	3240
TEMP SWITCH	200° F	LIGHT TURNS ON AT 200°F AND OFF AT 170° F, 1/2" NPT.	3246
TEMP SWITCH	220° F	LIGHT TURNS ON AT 220°F AND OFF AT 190° F, 1/2" NPT.	3247

\* Peak/Memory function included

# BATTERY EXTENDER 1 1/2" GAUGES



## BATTERY EXTENDER

The reinvention of the legendary Auto Meter Battery Extender, this highly improved unit features massively expanded compatibility with nearly all battery types, (including AGM), automated de-sulfation, overcharge protection and the lowest power usage available.

BATTERY EXTENDER	VOLTAGE	CHARGE CURRENT	CHARGING MODES	BATTERY COMPATIBILITY	OVERCHARGE PROTECTION	INCLUDES
BEX-1500	12V	1.5 AMPS	DESULFATION, BULK, ABSORPTION, AND MAINTAIN	FLOODED, AGM, GEL	✓	RING TERMINALS AND BATTERY CLIPS
BEX-3000	12V	3.0 AMPS			✓	
BEX-5000	6V, 8V, 12V, 16V	5.0 AMPS			✓	



## 1 1/2" LIQUID FILLED GAUGES

These 1 1/2" Liquid Filled Mechanical Pressure gauges are a great way to monitor critical pressures under the hood! They feature an 1/8" NPT Male port for easy, leak-free connections, extreme vibration resistance, and are available in Black, White, or Silver to match your other Auto Meter gauges.




GAUGES	INCLUDES/DETAILS	MODEL NUMBER
1 1/2" DIRECT MOUNT PRESSURE GAUGE	LIQUID FILLED 0-15 PSI, BLACK DIAL, POLISHED BEZEL, 1/8" NPT PORT	2172
1 1/2" DIRECT MOUNT PRESSURE GAUGE	LIQUID FILLED 0-60 PSI, BLACK DIAL, POLISHED BEZEL, 1/8" NPT PORT	2173
1 1/2" DIRECT MOUNT PRESSURE GAUGE	LIQUID FILLED 0-100 PSI, BLACK DIAL, POLISHED BEZEL, 1/8" NPT PORT	2174
1 1/2" DIRECT MOUNT PRESSURE GAUGE	LIQUID FILLED 0-15 PSI, WHITE DIAL, POLISHED BEZEL, 1/8" NPT PORT	2175
1 1/2" DIRECT MOUNT PRESSURE GAUGE	LIQUID FILLED 0-60 PSI, WHITE DIAL, POLISHED BEZEL, 1/8" NPT PORT	2176
1 1/2" DIRECT MOUNT PRESSURE GAUGE	LIQUID FILLED 0-100 PSI, WHITE DIAL, POLISHED BEZEL, 1/8" NPT PORT	2177
1 1/2" DIRECT MOUNT PRESSURE GAUGE	LIQUID FILLED 0-15 PSI, SILVER DIAL, POLISHED BEZEL, 1/8" NPT PORT	2178
1 1/2" DIRECT MOUNT PRESSURE GAUGE	LIQUID FILLED 0-60 PSI, SILVER DIAL, POLISHED BEZEL, 1/8" NPT PORT	2179
1 1/2" DIRECT MOUNT PRESSURE GAUGE	LIQUID FILLED 0-100 PSI, SILVER DIAL, POLISHED BEZEL, 1/8" NPT PORT	2180

GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

# TACH ADAPTER SIGNAL CONVERTER TACH ACCESSORIES

<b>MAGNETO SIGNAL CONVERTER</b>	ALLOWS ANY AUTO METER SPORT-COMP OR PRO-COMP STANDARD IGNITION TACHOMETER, OR DPSS CONTROLLER MODULE TO BE USED IN MOST EXTERNAL COIL MAGNETO APPLICATIONS. (SUPPRESSION CORE PLUG WIRES REQUIRED)	9118
<b>TACHOMETER FILTER</b>	USED TO HELP SMOOTH TACHOMETER POINTER WHEN USED WITH SOME POINTS IGNITIONS, OR OTHER ELECTRONICALLY "NOISY" IGNITIONS	9116
<b>DIMMER SWITCH</b>	ALLOWS FOR ISOLATED DIMMING OF LED THROUGH THE DIAL LIT GAUGES SEPARATE FROM OEM DASH. COMPATIBLE WITH ALL LED LIT INSTRUMENTS. SUPPORTS UP TO 6 GAUGES.	9114
<b>DIS TACH ADAPTER</b>	ALLOWS ANY AUTO METER STANDARD IGNITION TACHOMETER OR DIGITAL PRO SHIFT SYSTEM GAUGE, TUBE, OR CONTROLLER MODULE TO BE USED ON DISTRIBUTORLESS IGNITIONS. (FUEL INJECTED)	9117
<b>LS TACH ADAPTER KIT</b>	INCLUDES 2189 HARNESS AND 9117 ADAPTER. UP TO MODEL YEAR 2013 LS APPLICATIONS.	9123
<b>LS TACH ADAPTER HARNESS</b>	A SIMPLE PLUG & PLAY SOLUTION FOR INSTALLING A 9117 ON AN LS APPLICATION. UP TO MODEL YEAR 2013 LS APPLICATIONS.	2189

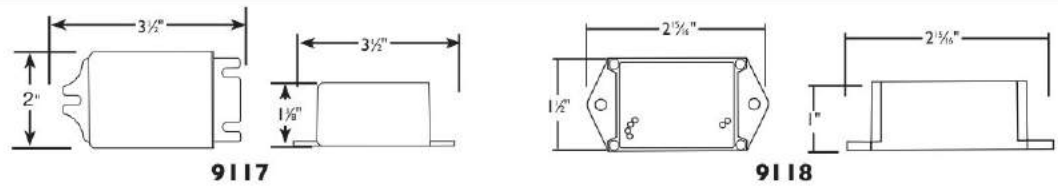

## TACHOMETER ACCESSORIES

**5211 Replacement Probe**  
For use w/ 6806 5" Pro-Comp Memory tach for diesel engine tractor pullers.



**5259 Replacement Magnet Kit for Dual Channel Playback Tachs.**  
Includes 2 "Rare Earth" magnets & adhesive compound.



**5225 Replacement Rotary Memory Switch**  
For tachs w/ remote Memory plate. Works w/ recessed switch design.  
**NOTE:** Switch assembly only, mounting plate not included.



**5265 Extended Length Base**  
Provides extra clearance for mounting Pedestal Tachs & Gauges in cups on a dashboard.



**3209 Replacement Shock Strap Kit**  
For 5" Tachs w/ Stepdown Case & Most 3 3/4" Pedestal Mount Tachs. (does not fit Mini-Monster Tach)



**5212 Drive Shaft Sensor (Dual Channel Tach)**  
For use with Ultimate II/III/DL Dual Channel Playback tachometers.





## EXTENSION CABLES

**Shift-Lite**  
**3257 3ft. Extension wire w/ connectors**



**5223 20' Digital Stepper Motor Nitrous Pressure Harness**  
 Ideal for mounting sender on bottle in rear of car. No white wire for factory LED lit gauges.



**5252 Wideband Extended Harness, Street/Analog**

**5253 Wideband Extended Harness, Pro Series**  
 Wideband Extended Harness replaces existing 8' harness with a 25' harness.

**5257 Pyrometer Extension Module, Stepper Motor Incandescent Pyrometer Gauges**

Due to the incredibly sensitive nature of Auto Meter's high precision Pyrometers, it is critical for the accuracy of the instrument that the length of the probe harness never be modified. Auto Meter's Pyrometer Extension Modules provide an easy and affordable way to extend your harness up to 75' additional feet with no loss in accuracy or response. For use with gauges utilizing 10-pin connector on back of gauge.



**5256 Pyrometer Extension Module for Incandescent Lighting (Perimeter Lit)** Gauges with threaded probe wire connections on back of gauge. Not for gauges w/10-PIN connector on back of gauge.

## WIRING HARNESES

**2198 Wire Harness, Universal for Tach/Speedo/Electric Gauges, Including LED indicators**



**5226 Replacement for Digital Stepper Temperature**

**5227 Replacement for Digital Stepper Pressure**

**5229 Replacement for MAP sensor (Boost & Boost/Vac).**

**5223 20' Digital Stepper Nitrous Pressure Harness**  
 Ideal for mounting sender on bottle in rear of car. No white wire for factory LED lit gauges.

**5232 8' Replacement for Wideband Pro**

**5233 Replacement for Digital Stepper Fuel Level**

**5234 Replacement for Digital Stepper Voltmeter**

**5275 Elite Pressure Harness**

**5276 Elite Temperature Harness**

**5296 EGT Probe and Harness for Elite Series Gauges**

**5297 EGT Wire Harness For Incandescent Lit Digital Stepper Motor Gauges (No Probe) - use #3249**

**5298 Wiring Harness, Wideband Air/Fuel Ratio Street/Analog**

**P19317 Spek-Pro for ECU Gauges (Flying Leads)**

**P19320 Spek-Pro Boost & Boost/Vac**

**P19340 Spek-Pro EGT/Pyrometer**

**P19370 Spek-Pro Temperature**

**P19372 Spek-Pro Volt**

**P19373 Spek-Pro Tach/Speedo**

**P19380 Spek-Pro Fuel, Oil, Water Pressure**

## CONNECTORS


**3298 SSE Gauge Connector**  
 2 pack (Does not include wires)



**3299 Tach/Speedo Connector**  
 (Does not include wires)





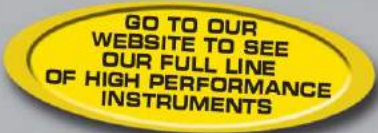

# ACCESSORIES

## GAUGE ACCESSORIES

### 3230 Blower Memory Kit

Can be used to add memory function to any boost or blower pressure gauge (air only).



## FUEL PRESSURE ADAPTERS

### 3275 Ford Fuel Rail Adapter

1/8" NPT M to -4AN M mech. gauge fuel rail adapter; replaces Schrader Valve assembly.



### 3280 Ford Fuel Rail Adapter

1/8" NPT M to 1/8" NPT F fuel rail adapter; replaces Schrader Valve assembly. For Elec. Fuel Press. gauges.



### 2276 Banjo Bolt Adapter

12mm Banjo Bolt to 1/8" NPT M; replaces Banjo Bolt on Import under hood fuel filter applications. Dimensions 12mm x 1.25



## -4AN ELBOW FITTINGS

### 3273 45° Elbow Fitting

-4AN elbow fitting, 45° with swivel nut. Also for use with the new -4AN Fuel Pressure, Brake Pressure, and Nitrous Pressure gauges.



### 3274 90° Elbow Fitting

-4AN elbow fitting, 90° with swivel nut. Also for use with the new -4AN Fuel Pressure, Brake Pressure, and Nitrous Pressure gauges.



## RIGHT ANGLE FITTINGS

For Auto Meter Mech. Press. and Vacuum Gauges with 1/8" NPT port.

### 3270 For pressure gauges

Using #3, braided stainless steel line.



### 3271 For pressure gauges

Using #4, braided stainless steel line.



### 3272 For pressure gauges

Using 1/8" copper or nylon tubing.



### 3278 Blue Aluminum Anodized

Using #4, braided stainless steel line.



## EXTENSION ADAPTERS

For Extra Water Passage Clearance On All Mechanical Temperature Gauges

### Auto Meter & Autogage

#### 2270 1/2" NPT Temp. Extension



#### 2271 3/8" NPT Temp. Extension

## TEMPERATURE ADAPTERS

### 2260 Weld-In Adapter for 1/8" NPT

(Pyrometer probe, elec. trans., & oil temp.)



### 2261 Weld-In Adapter

Steel adapter for all mech. oil and trans. temp. gauges.

For All Mechanical Temperature Gauges

### Auto Meter & Autogage

#### 2263 3/8" Brass NPT Temp Adapter



#### 2264 1/2" Brass NPT Temp Adapter

#### 2272 3/8" Red Alum. NPT Temp Adapter

#### 2273 1/2" Red Alum. NPT Temp Adapter



## METRIC ADAPTERS

For Adapting Oil Pressure and Temperature Gauges to many Foreign and domestic engines.

### Oil Pressure

#### 2265 M10x1 (M) to 1/8" NPT (F)

#### 2266 M12x1 (M) to 1/8" NPT (F)

#### 2267 M14x1.5 (M) to 1/8" NPT (F)

#### 2268 M16x1.5 (M) to 1/8" NPT (F)

#### 2269 1/8" BSPT (M) to 1/8" NPT (F)



### Mechanical Temperature

#### 2275 M16x1.5 (M) to 5/8"-18 UNF (F)



### Electric Temperature or Pressure

(Must use 2259 sender for short sweep temp gauges)

#### 2277 M12x1.5 (M) to 1/8" NPT (F)

#### 2278 M12x1.75 (M) to 1/8" NPT (F)

(Also see LS Install Kit on pg 128)



## NITROUS / FUEL RESTRICTOR

### Restrict Press. Spikes & Excessive Fluctuations.

#### 3277 Restrictor Fitting, 1/8" NPT M to -4AN M .025" orifice



#### 3279 Fuel Press Snubber / Restrictor

1/8" NPT M to 1/8" NPT F

(Required for '98 and Later Dodge Diesel Apps.)

# ACCESSORIES



## TUBING / HOSE

### 3222 Nylon Tubing, 10ft., 1/8" dia. w/ Ferrules

Only for mech. press. gauges up to 200 psi (except fuel press. gauges).



### 3223 Nylon Tubing, 10ft., 1/8" dia. w/ Fittings & Ferrules

Only for mech. press. gauges up to 200 psi (except fuel press. gauges).



### 3226 Nylon Tubing, 12ft., 1/8" dia.

For mech. press. gauges (except fuel or brake press. gauges) w ferrules and fittings.



### 3224 Copper Tubing, 6ft., 1/8" dia.

For mech. press. gauges (except fuel or brake press. gauges).



### 3227 Braided Stainless Steel Hose, 3ft. #4, 3/16" ID Fittings

For mech. press. gauges. Recommended for fuel press. gauges.



### 3228 Braided Stainless Steel Hose, 6ft. #4, 3/16" ID Fittings

For mech. press. gauges. Recommended for fuel press. gauges.



### 3229 Braided Stainless Steel Hose, 4ft. #4, 3/16" ID Fittings

For mech. press. gauges. Recommended for fuel press. gauges.



### 3234 Braided Stainless Steel Hose, 3ft. #3, 3/16" ID Fittings

For mech. press. gauges. Recommended for fuel press. gauges.



### 3235 Braided Stainless Steel Hose, 4ft. #3, 3/16" ID Fittings

For mech. press. gauges. Recommended for fuel press. gauges.



### 3236 Braided Stainless Steel Hose, 6ft. #3, 3/16" ID Fittings

For mech. press. gauges. Recommended for fuel press. gauges.



## TEMPERATURE MANIFOLDS

For Transmission Temperature Gauges

2286 Fits 3/8" O.D. Tubing

2287 Fits 5/16" O.D. Tubing



## HOSE ADAPTERS

### 2280 5/8" Heater Hose Adapter

For elec. gauges only



### 2281 3/4" Heater Hose Adapter

For elec. gauges only



### 2282 1-1/4" Radiator Hose Adapter

For elec. & mech. gauges

### 2283 1 1/2" Radiator Hose Adapter

For elec. & mech. gauges

## HIGH PRESSURE GAUGE ISOLATOR

### 5282 High Pressure Isolator

For interior mounting of any 100 PSI Auto Meter mechanical pressure gauge. This isolator is rated at 200 psi. working pressure with a maximum of 300 psi. peak. Comes with 4' of braided hose. **NOTE:** Compatible with gasoline, oil, and antifreeze. Do not use with alcohol or nitro-methane fuels. Not recommended for 15 PSI gauges.



## EXHAUST PRESSURE PARTICLE TRAP KIT

### 5375 Exhaust Pressure Particle Trap Kit

Traps carbon to eliminate or greatly reduce carbon at the sender or gauge. This will help to ensure a long healthy life of your exhaust pressure gauge and/or sender. User serviceable.



## FUEL LEVEL SENDER

### 3262 Universal Fuel Level Sender

For 240ΩE/33Ω Full gauge models. Adjustable for 5" - 24" deep tank. Fits standard 5-Bolt mounting flange.



### 3263 Fuel Sender Adapter

6 hole to 5 hole, 36-46 Ford.

## LS GAUGE INSTALL KIT

### 5284 LS Install Kit\*

Includes 2277, 2268, 2259, and a 10K resistor and LS Gauge Install Guide.

\* See also LS Tach Adapter Harness under Tach Accessories (pg 125)



GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

# ACCESSORIES

## REPLACEMENT SENDERS

### Pressure

**2229 Sender for 60 PSI Fuel Press & Boost**  
(Full Sweep, 1/8" NPT)

**2239 Sender for 30 PSI Fuel Press**  
(Full Sweep, 1/8" NPT)

**2242 100 PSI Short Sweep Elec Oil Press Gauges**  
(Also for Digital Oil Pressure 1/8" NPT)

**P13115 Spek-Pro Sensor**  
(For 30/30 Vac/Boost 35 PSI Boost)

**P13153 Spek-Pro Pressure Sensor**  
(For 100, 120, 150 PSI/Except Boost)

**P13155 Spek-Pro Pressure Sensor**  
(For 15 & 30 PSI Fuel Pressure)

**P13113 Spek-Pro Pressure Sensor**  
(For 60 & 100 PSI Boost)

**2240 Nitrous & Brake Press. Sender**  
(Full Sweep, 1/8" NPT)

**2245 Sender for 15 PSI Fuel Press. & Boost**  
(Full Sweep, 1/8" NPT)

**2246 Sender for 100 PSI Oil & Fuel**  
(Full Sweep, 1/8" NPT)

**2247 Boost/Vac 30 in.Hg. - 15 psi Sender**

**2249 Boost/Vac 30 in.Hg. - 30 psi Sender**  
(Also for Digital Boost/Vac)

### Air/Fuel Oxygen Sensors

**2243 Wideband O2 Sensor**  
For Auto Meter Wideband AFR gauges. Not for use with alcohol, leaded, or diesel fueled engines.

**2244 Oxygen Sensor Kit**  
For Narrowband air/fuel ratio (includes sensor, weather pack harness, and weld fitting). Not for use with alcohol, leaded, or diesel fueled engines.

### Short Sweep Electric Temp.

**2258 Short Sweep Elec. Temp. Gauges (250°, 300°, & 340°) 1/8" NPT w/ 3/8" & 1/2" NPT Adapters.**

**2259 Elec. Cyl. Head Temp. Gauges (340°)**  
(Also Replaces 2258 Sender In Shallow Depth Mountings, 1/8" NPT)

### Digital Stepper Motor & Full Sweep

**2252 Digital Stepper Motor & Spek-Pro Temp. Sender**  
(Also for Digital Temp Gauges 1/8" NPT)

**2250 Full Sweep Gauges w/ Black Box (60° - 210°) 1/8" NPT**

**2251 Harness for Low Temp. Sender #2250**

### Autogage

**2385 For elec. temp. gauges.**  
1/8" NPT w/ 3/8" & 1/2" Adapters



## PYROMETER ACCESSORIES

### EGT Type K Thermocouple Probes

#### 5251 Replacement Probe Kit

For use w/ Auto Meter Cobalt, C2, ES, GS, NV, Sport-Comp II, Phantom II, Ultra-Lite II, & Factory Match Pyrometer Gauges. Replacement kit includes wiring harness w/ gauge connector.

### Armored Tip

#### 5249 Probe Kit

Complete Probe kit includes 1/4" dia. Stainless Probe w/ 10 1/2 ft. wire plus 1/4" compression-1/8" NPT connector. For perimeter lit and Spek-Pro gauges.



### Replacement Fitting Kits

Included w/ 5243 & 5244 probes.

#### 5254 1/4"- 1/8" Probe Fitting

1/4" Compression to 1/8" NPT connector fitting & mating 1/8" NPT weld fitting.



#### 5255 3/16"- 1/8" Probe Fitting

3/16" Compression to 1/8" NPT connector fitting & mating 1/8" NPT weld fitting.

## ELECTRIC SPEEDOMETER SENDERS

For use with all Auto Meter electronic programmable speedometers. Not intended to drive OE speedometers.

### 5289 GPS Speedometer Module

Includes Antenna. Converts any Auto Meter electronic speedometer into a GPS speedometer.



### 5291 Hall Effect Speedometer Sender

7/8"- 18THD. Hall Effect sender, 16 pulse per rev. Includes pass-thru drive for cruise control.



### 5292 Hall Effect Speedometer Sender

Ford Plug-in, Hall Effect sender, 16 pulse per rev. Includes



### 5290 Universal Speedometer Sensor

For drive shaft, axle mount, etc.

## GPS ANTENNA

### 5283 GPS Antenna

For Auto Meter GPS Speedometers & 5289 GPS Module.



## PRO-LITE WARNING LIGHT SWITCHES

**3241 Pressure Switch 18 PSI, 1/8" NPT.**


**3242 Pressure Switch 30 PSI, 1/8" NPT.**

**3243 Pressure Switch 50 PSI, 1/8" NPT.**

**3246 Temperature Switch 200°F, 1/2" NPT.**

**3247 Temperature Switch 220°F, 1/2" NPT**

May be Single or Dual Terminal

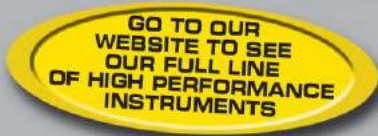

## BULBS & SOCKETS

- 2357 Bulb & Socket 2 Watt**  
For use with 2 1/16" Auto gage gauges.
- 2359 Bulb & Socket 2 Watt**  
For use with 2 5/8" Auto gage gauges.
- 2388 Bulb & Socket (Package of 2)**  
For use with 1 1/2" mini gauges.
- 3211 Bulb & Socket No. 168/4.9 Watt**  
For use with 2 1/16" and 2 5/8" gauges (steel cases). Also used in some tachometers and speedometers.  
**NOTE:** Replaces Old Style Socket
- 3212 Bulbs & Socket No. 161 & 168/4.9 Watt**  
  
Also used in some tachometers and speedometers.  
**NOTE:** Replaces Old Style Socket
- 3218 Replacement Bulb No. 86**  
For use w/ 3219 socket & the Shift-Lite on 3903 tachometer.
- 3219 Bulb & Twist In Socket No. 86**  
Used w/ all 5" Pedestal Tachs w/replacement bulb on control panel (shield) assembly.
- 3220 Bulb & Socket No. 161/2.7 Watt & No. 194/3.8 Watt & No. 168/4.9 Watt**  
For use w/ all Auto Meter gauges in plastic cases (except blue plastic case). That use twist in light socket.



## COLORED LENS KITS

For Optional Color on Pro-Lite Warning Lights and Shift-Lite Tachs

- 3250 Blue Lens Kit**  
Blue lens and blue night cover.
- 3251 Yellow Lens Kit**  
Yellow lens and yellow night cover.
- 3252 Red Lens Kit**  
Red lens and red night cover.
- 3254 Mini Pro-Lite Cover Kit**  
Includes blue, yellow, and red boots.



## LIGHT BULB COVERS

For Optional Lighting Color On Most Gauges (Kit Includes 3 Covers)

- 3207 Blue Kit**
- 3208 Yellow Kit**
- 3214 Red Kit**
- 3215 Green Kit**



For Auto Meter gauges (except clocks, A/F ratio, & Autogage), speedometers, & most in-dash tachs w/ Incandescent Light Bulbs. Does not work w/ Digital & LED Lit gauges (i.e. Cobalt, C2, Designer Black II, ES, GS, MCX, NV, Old Tyme White II, Phantom II, Sport-Comp II, Ultra-Lite II).

## LED REPLACEMENT BULB KITS

**Upgrade Your Standard Instrument Lighting with Intense LEDs.**  
Replaces 161, 193, 194, & 168 style wedge base bulbs only.

- 3284 Red**
- 3285 Green**
- 3286 Blue**
- 3287 Amber**
- 3288 White**



For Auto Meter gauges (except clocks, A/F ratio, & Autogage), speedometers, & most in-dash tachs w/ Incandescent Light Bulbs. Does not work w/ Digital & LED Lit gauges (i.e. Cobalt, C2, Designer Black II, ES, GS, MCX, NV, Old Tyme White II, Phantom II, Sport-Comp II, Ultra-Lite II).

**For Auto Meter Pedestal Tachs & Some In-dash Tachometers.**

- 3294 Red** Replacement Kits for Tachometers using the small twist-in light (#3219) on the front "shield." Does not work w/ Digital & LED Lit gauges (i.e. Cobalt, C2, Designer Black II, ES, GS, MCX, NV, Old Tyme White II, Phantom II, Sport-Comp II, Ultra-Lite II).
- 3295 Green**
- 3296 Blue**
- 3297 Amber**

## MOUNTING CUPS

**2 1/16" Auto Meter & Auto gage**  
For Use With All Current Auto Meter and Autogage 2 1/16" Gauges

- 2203 Chrome**
- 2204 Black**

**2 5/8" Auto Meter**  
For Use With All 2 5/8" Electric Gauges (will not work with Auto gage).

- 3201 Chrome**
- 3202 Black**

For Use With All 2 5/8" Mechanical Temperature and Pressure Gauges (will not work with Auto gage).

- 3203 Chrome**
- 3204 Black**

**2 3/8" Pro-Comp Liquid-Filled**  
For Use With Liquid-Filled Pressure & Temperature Gauges

- 5201 Chrome**
- 5202 Black**

**3 3/8" Pro-Comp**  
For Use With 3 3/8" In-dash Tach & Electronic Speedometer

- 5203 Chrome**
- 5204 Black**

**Real Carbon Fiber**

- 2121 2 1/16" Gauge Cup**
- 2151 2 5/8" Electric Gauge Cup**
- 2152 2 5/8" Mechanical Gauge Cup**
- 2155 5" Monster Tachometer Cup**

For 5" Pedestal mount tachs with 3 3/8" case

**Note:** May be necessary to trim the length of the mounting studs on most gauges in order to slide all the way into cup.



GO TO OUR WEBSITE TO SEE OUR FULL LINE OF HIGH PERFORMANCE INSTRUMENTS

# ACCESSORIES

## MOUNTING CUPS CONT'D

**2 1/16" Omni Pod - Lightweight Universal Gauge Mount**  
For use with all AutoMeter Digital Stepper Motor and AirDrive gauges.

2205 Black



## GAUGE PANELS

For All 2 1/16" Auto gage & Auto Meter gauges

2236 1-Hole Black Aluminum Panel

2237 2-Hole Black Aluminum Panel

2238 3-Hole Black Aluminum Panel



For All 2 5/8" Auto gage & Auto Meter gauges

3231 1-Hole Black Aluminum Panel

3232 2-Hole Black Aluminum Panel

3233 3-Hole Black Aluminum Panel



## ANGLE RINGS

Quality molded black composite rings angles gauges 15 degrees towards driver. Sold in package of three. Requires modifying mounting bracket

2234 For Auto Meter or Autogage 2 1/16" gauges.

3244 For Auto Meter or Autogage 2 5/8" gauges.



## MOUNTING BRACKETS

Quality molded black composite mounting brackets w/ aluminum thumb nuts and washers. Sold in package of three.

2230 Bracket Kit Assy., Auto Meter 2 1/16" gauges.

3245 Bracket Kit Assy., Auto Meter 2 5/8" gauges.



Aluminum mounting brackets w/ 8-32 aluminum thumb nuts and washers. Sold in package of three.

2225 Bracket Kit Assy., Auto Meter 2 1/16" gauges.

2226 Bracket Kit Assy., Auto Meter 2 5/8" gauges.



PI2467 Spek-Pro Spin-On Bracket 2 1/16" gauges.



## POD/PILLAR FASTENERS

For use on Gauge Works Pods and Pillars

3281 Package of 10

3282 Package of 100



## TIRE PRESSURE GAUGES



2343  
No Storage Case Included with 2343

2164

2160

2162

2159

2163

There are few things that affect the performance of your vehicle as much as your tire pressure. These professional grade tire pressure gauges from AutoMeter are built with the same exacting attention to detail you've come to expect from all of their gauges. Unparalleled accuracy and durability combine to make one of the best bang for the buck values in the performance world. A durable carrying case is included with each gauge.

## QUALITY PRODUCTS AND FEATURES


FOUND IN EVERY TACHOMETER

Since Auto Meter first introduced the 5" Diameter Monster Tach™ in 1976, Racing enthusiasts have trusted and relied upon these features:



## Also Found in QUALITY PERFORMANCE GAUGES

Every Auto Meter gauge is designed, assembled, and calibrated to the exacting standards today's high performance racer expects from the industry leader in competition instruments!

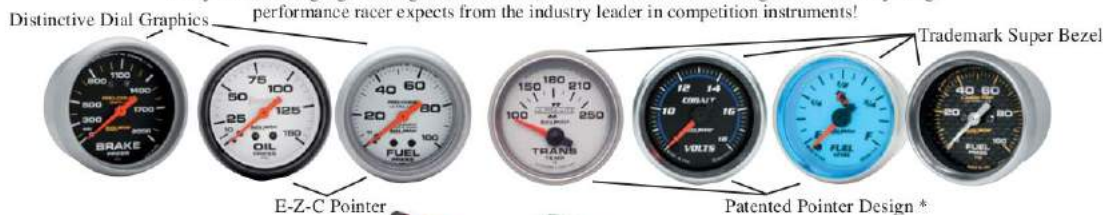

## PATENTED BATTERY TESTER SYSTEMS

These Battery Testers Systems are protected by one or more of the following Patents: U.S. Patent No. D442,503S, U.S. Patent No. 6,061,658, U.S. Patent No. 6,359,442 B1, U.S. Patent No. 6,771,073 B2, U.S. Patent No. 7,990,155, U.S. Patent No. 7,909,662, U.S. Patent No. 7,736,201



## PATENTED TACHOMETER TECHNOLOGY FOR HIGH PERFORMANCE

These products may utilize one or more of the following Patented Technologies: U.S. Patent No. 5,905,374, U.S. Patent No. 5,982,168, U.S. Patent No. 6,137,399, U.S. Patent No. 6,215,298 B1, and U.S. Patent No. 7,012,514, Australian Patent No. AU 772842, New Zealand Patent No. 518824



A.M.P. IS A PROUD MEMBER/SPONSOR OF THESE ORGANIZATIONS  
SEMA, PWA, NHRA, IHRA, TEAM LUCAS, GOODGUYS AUTOCROSS, NMRA, AND NMCA



### Trademarks:

Auto Meter	USPTO Registration No. 1,683,615	Auto Meter Logo	USPTO Registration No. 3,076,477	Auto gage	USPTO Registration No. 1,497,472
Phantom	USPTO Registration No. 1,875,140	Auto Meter logo	USPTO Registration No. 1,732,643	Pro-Lite	USPTO Registration No. 2,370,310
Battery Extender	USPTO Registration No. 2,756,383	Ultra-Lite	USPTO Registration No. 1,967,635	Super Bezel	USPTO Registration No. 2,885,435
Shock Strap Supplemental Registration No.	2,564,743	Monster Bezel	USPTO Registration No. 3,251,019	Nexus	USPTO Registration No. 3,274,254
Pro Parts	USPTO Registration No. 2,652,966	Sully	USPTO Registration No. 3,455,688	Spek	USPTO Registration No. 3,105,738
Wide Angle Dial	USPTO Registration No. 3,506,818	Wedgie	USPTO Registration No. 2,690,587		

Auto Meter Products, Inc. holds the following trademarks and tradenames:

### Trade Names

C2, Carbon Fiber, Chosen by the Pro's, D-PIC, Cruiser and Crusier AD, Golden Oldies, Mini-Monster, Monster Gauges, Monster Tach, NEXUS, NV, Prestige Series Antique Ivory and Black Diamond, Power • Precision • Passion, Elite, Pro-Comp, Pro-Shift, Pro-Tech, Sport-Comp, Sport Comp II, Sport Comp II PC, Phantom, Phantom II, Ultra Lite, Ultra Lite II, Ultra Lite Pro, Pro Comp Pro, Ultimate Silver, Z-Series, Cobalt, GS, ES, American Muscle, American Platinum, Antique Beige, Arctic White, Designer Black, Designer Black II, Old Tyme White, Old Tyme White II, Old Tyme Black, Ecometer, Gaugeworks, DPSS, Digital Pro-Shift System, Inter-Act Pack, Stack, Traditional Chrome, Cobra, Ultra-Nite, MCX and Inside Every Winning Ride.

\* U.S. Patent No. 6,663,251 B2 Non-Licensed or unauthorized use or imitations of the above listed trademarks or trade names will be held to entitle Auto Meter Products, Inc. to seek all forms of remedy at law.

# SPECIFICATIONS

Sizes shown are largest expected size. Sizes may vary slightly in each individual series. Dimensions are for gauge size only. Please allow 1-3 inches for Fittings & Capillary Tubing. For individual questions or further information on installation procedures, contact our Service Department at (866) 248-6357. Instruments include all necessary hardware and 12V lighting unless otherwise noted.

## (A) AUTOGAUGE

**A1 MINI TACHOMETER**  
Adhesive Base Offers Secure Versatile Dashboard Mounting. Dial cannot be turned.  
3 1/4" x 2 3/4" x 2 1/4"

**A2 MINI GAUGE CONSOLE**  
DIAL FACE: 1 1/2"  
Depth: 1 1/8"  
Gauges are removable from panel.  
A. 2 3/16" Single Gauge

**A3 3 3/4" TACHOMETERS**  
DIAL FACE: 3 3/4"  
4 3/8" x 3 3/4"

**A4 2 1/16" GAUGES IN STEEL CONSOLES**  
DEPTH: 1 1/2"  
A. 2 5/8" Single Cage  
B. 5 1/8" Dual Cage  
C. 7 1/2" Triple Cage

**A5 1 1/2" INDIVIDUAL GAUGES IN PANEL**  
DEPTH: 1 1/2"  
2 5/16" x 2 1/4" x 2 1/8"

**A6 2 5/8" GAUGE CONSOLE**  
Amp and volt gauges require separate wire kits.  
9 5/8" x 2 5/8"

**A7 2 5/8" GAUGES**  
HOLE SIZE: 2 5/8"  
Amp and volt gauges require separate wire kits.  
2 7/8" x 2 5/8" x 1"

**A8 1 1/2" PRESSURE GAUGE**  
1/8"-27 NPT FITTING  
No lighting included.  
1 3/4" x 1 1/16" x 1 3/4"

## (B) 2 1/16" TACHS & GAUGES

**B1 TACHS**  
HOLE SIZE: 2 1/16"  
A. 2 3/16" Traditional Chrome  
2 1/4" All other bezels.  
Dashed Bezel & Lens apply to the Street Rod Series.

**B2 GAUGES**

SSE	MECH	FSE
A. 2 1/4"	A. 2 1/4"	A. 2 1/4"
B. 1 1/2"	B. 1 1/2"	B. 1 1/2"
C. 2 5/8"	C. 2 5/8"	C. 2 5/8"

**SSE (LED) MECH (LED)**

A. 2 1/4"	A. 2 1/4"
B. 1 1 3/16"	B. 1 1 3/16"
C. 2 7/8"	C. 2 7/8"

## (C) 2 5/8" (67MM) TACHS & GAUGES

**C1 INCANDESCENT GAUGE**  
HOLE SIZE: 2 5/8" (67MM)  
A. 1 3/16" (40MM)  
B. 2 5/8" (67MM)  
C. 2 7/8" (73MM)  
D. 2 1/8" (54MM) SHORT SWEEP ELEC TERMINALS  
D. 2 1/8" (54MM) w/1/8 NPT PORT  
D. 2 1 1/16" (78MM) w/4AN PORT

**C2 LED GAUGE**  
HOLE SIZE: 2 5/8" (67MM)  
A. 1 1 1/16" (49MM)  
B. 3" (76MM)  
C. 2 7/8" (73MM)  
D. 2 1/2" (64MM) SHORT SWEEP ELEC TERMINALS  
D. 2 1/2" (73MM) w/1/8 NPT PORT  
D. 3 1/16" (78MM) w/4AN PORT

**C3 LIQUID FILLED GAUGE**  
HOLE SIZE: 2 5/8" (67MM)  
A. 1 1/2" (38MM)  
B. 2 1/4" (53MM)  
C. 2 7/8" (73MM)  
D. 2" (51MM) w/1/8 NPT  
D. 2 3/16" (65MM) w/4AN

**C4 2 5/8" TACHOMETERS**  
A. 3 1/4" (83MM)  
B. 3 15/16" (100MM)  
C. 2 7/8" (73MM)




**C5 4" INSTRUMENT SPECS**  
HOLE SIZE: 3 7/8" (99MM)  
A. 2 3/8" (61MM)  
B. 3 15/16" (100MM)  
C. 4 1/8" (105MM)  
D. 3 1/2" (89MM) MECH SPEEDO FITTING

## (D) 3 1/8" TACH & SPEEDO


**D1 MECH IN-DASH SPEEDO**  
HOLE SIZE: 3 1/8"  
A. 2 1/8"  
B. 3 1/4"  
C. 3 5/16" Speedometer Shown

**D2 ELEC IN-DASH SPEEDO & TACH**  
HOLE SIZE: 3 1/8"  
A. 1 3/4"  
B. 2 3/4"  
C. 3 5/16"

## (E) 3 3/8" TACH, SPEEDO, & GAUGES

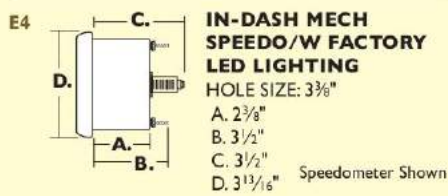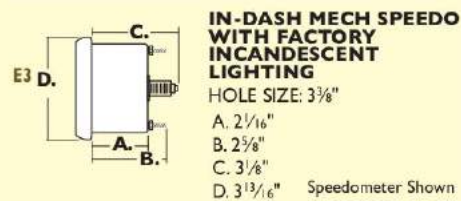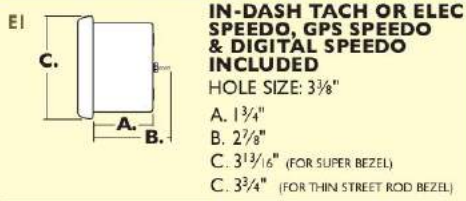





## (F) 3 3/8" TACHOMETERS

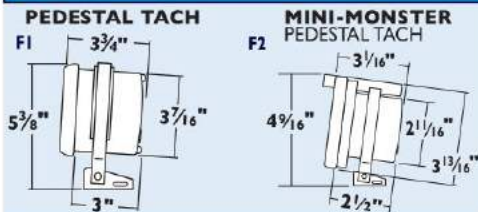


## (G) 5" TACHS AND SPEEDOS



## (G) 5" TACHS AND SPEEDOS

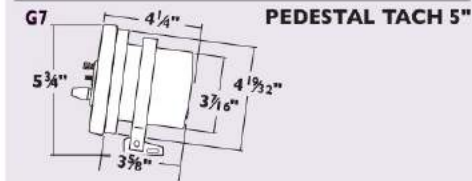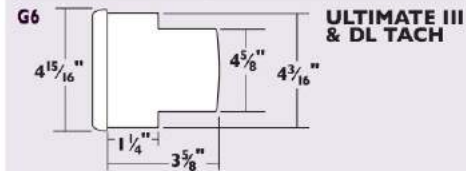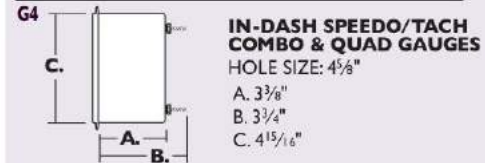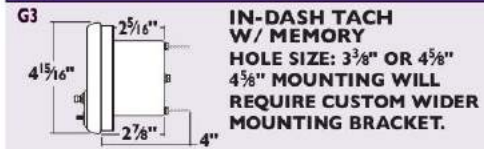

## (H) SPEK-PRO

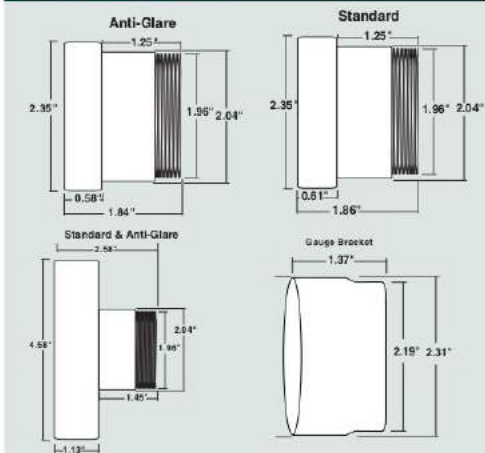



# APPAREL



0422



0414



0410



0207 0451 0453 0208



0216



0217



0456



0415



FRONT



0213



0214

JACKET		DETAILS	MODEL NUMBER
Black Letterman	BLACK WOOL/LEATHER, GRAY LOGOS, SIZE S, M, L, XL, 2X		0415
SHIRTS		DETAILS	MODEL NUMBER
Monster T-Shirt Adult	SIZES: S, L, XL, 2X		0401
Monster T-Shirt Child	SIZES: S, L		0402
No Imitations T-Shirt	SIZES: S, M, L, XL, 2X		0410
Retro-Ringer T-Shirt	SIZES: L, XL		0414
Black Logo T-Shirt	SIZES: S, M, L, XL, 2X		0422
Dedenbear T-Shirt	SIZES: M, L, XL, 2X		0421
HATS		DETAILS	MODEL NUMBER
Black, Trucker	EMBROIDERED COTTON TWILL MESH		0430
Black, Competition	EMBROIDERED TIGHT WOOL KNIT		0436
Black Flame	BRUSHED COTTON, VELCRO CLOSURE		0438
Black w/ Half Flame	BRUSHED COTTON, VELCRO CLOSURE		0442
Black Nu-Fit Hat	FITTED HAT SIZES S-M OR L-XL		0439
DECALS		DETAILS	MODEL NUMBER
Data Acquisition	9" CONTINGENCY LOGO, 1 PAIR		0216
Data Acquisition	19" FENDER/TRAILER CONTINGENCY LOGO, 1 PAIR		0220
Racing Contingency	9" CONTINGENCY LOGO, 1 PAIR		0207
Small Assorted Sizes	4" AND SMALLER CONTINGENCY LOGOS, 1 PAIR		0208
Super Size	19" FENDER/TRAILER, CONTINGENCY LOGO, 1 PAIR		0209
Vinyl Black	8" BLACK VINYL CORPORATE LOGO, 1 PAIR		0214
Vinyl White	8" WHITE VINYL CORPORATE LOGO, 1 PAIR		0213
MISC.		DETAILS	MODEL NUMBER
Banner	3FT. COMPETITION LOGO, PLASTIC BANNER		0212
Banner	6FT. COMPETITION LOGO, PLASTIC BANNER		0217
Cloisnone Hat Pin	COMPETITION LOGO		0453
Jacket Patch	4" EMBROIDERY, COMPETITION LOGO		0451
Can Koozie	HIGH QUALITY FOAM, COMPETITION LOGO		0456

Allow 3-4 Weeks For Delivery



0438



0430



0436



0439



0442

135

# INDEX

0207-0220.....	135
0401-0456.....	135
1100-1196.....	88-89
1100-1196.....	77-79
1200-1298.....	88-89
1202-1299.....	69
1200-1297.....	80-81
1288-M.....	65, 89
1300-1399.....	90-91
1302-1390.....	82
1300-00804-1398-00408.....	98
1302-M, 1388-M.....	65
1403-1499.....	90-91
1412-1490.....	51
1421-M, 1478-M.....	65
1501-1595.....	90-91
1501-1593.....	86-87
1601-1699.....	90-91
1602-1692.....	85
1602-M, 1688-M.....	65
1708-1798.....	90-91
1708-1796.....	86
1803-1899.....	90-91
1809-1890.....	84
1809-M, 1887-M.....	65
18016-18024.....	121
1901-1995.....	90-91
1901-1993.....	87
2000-2098.....	88-89
2001-2098.....	70-75
2121, 2151-2152, 2155.....	120
2125-2143.....	117
2130-2143.....	112
2121-2155.....	120, 130
2159-2160, 2162-2163.....	124
2159-2164.....	131
2172-2180.....	124
2189.....	125
2203-2204.....	120, 130
2205.....	131
2207, 2208.....	117
2225-2230.....	131
2229-2259.....	129
2234.....	131
2236-2238.....	120, 131
2243.....	131
2260-2278.....	127
2280-2283.....	128
2286, 2287.....	128
2300-2399.....	105
2300, 2305, 2313-2362.....	102
2323-2396.....	104
2347-2399.....	103
2357, 2359, 2388.....	130
2385.....	129
2357, 2359, 2388.....	130
2401-2499.....	63
2421, 2433, 2480, 2489, 2494.....	62
2514-2592.....	63
2532, 2592.....	62
2601-2699.....	61
2620-2699.....	60
2681.....	15, 39
2888-2894.....	61
2893, 2895, 2897.....	63
2897.....	62
3201-3204.....	120, 130
3201-3220.....	130
3209.....	120, 125
3222-3236.....	128
3230.....	127
3231, 3232, 3233.....	120, 131
3238-3254.....	122, 123
3238, 3239, 3240.....	122
3241-3247.....	129
3244, 3245.....	131
3250-3252, 3254.....	122, 130
3257.....	126
3262, 3263.....	128
3270-3280.....	126
3281, 3282.....	131
3284-3297.....	129
3298, 3299.....	126

3301-3391.....	50
3332, 3363, 3391.....	49
3303-M-3363-M.....	50, 51, 65
3301-J-3322-J.....	50, 65
3359, 3378.....	29
3379.....	4, 29
3381.....	15, 29
3387-3389.....	123
3401-3484.....	50
3431.....	49
3401-J-3421-J.....	50, 65
3431-M.....	51, 65
3514-3592.....	50
3522-M-3543-M.....	50, 65
3610-3699.....	29
3631, 3652, 3680-3699.....	28
3603-00406-3699-00406.....	98
3707, 3781, 3788.....	47
3700, 3708, 3780.....	51
3810-3899.....	36-37
3831, 3853, 3878-3899.....	36
3900-3995.....	51
3904, 3982, 3989, 3990, 3991.....	49
3911.....	45
3964-3965.....	47, 95
3900-3995.....	51
3966, 3967, 3980.....	51
3964, 3965, 3966, 3967.....	95
3987-M.....	51, 65
4211-4241.....	64
4301-4399.....	46-47
4332, 4352, 4357.....	45
4303-M-4363-M.....	46-47, 65
4378.....	4
4381.....	15
4387-4389.....	123
4401-4499.....	46-47
4403, 4480-4498.....	45
4421-J.....	46, 65
4431-M, 4487-M.....	47, 65
4489-M.....	47, 65
4511-4594.....	64
4701-4798.....	57
4777-4798.....	56
4787-M.....	65
4801-4899.....	57
4832, 4889, 4898, 4899.....	56
4910-4999.....	27
4931, 4953, 4980-4999.....	26
5152-5189.....	59
5160, 5161, 5189.....	59
5201-5204.....	120, 130
5211, 5212, 5225, 5259, 5265, 125	125
5223-5298.....	126
5283-5292.....	129
5285, 5286, 5287.....	118
5285.....	119
5288.....	120
5312-5314.....	123
5314.....	95
5320-5321, 5329-5335.....	122
5323.....	95
5231.....	121
5249-5255.....	129
5282, 5284.....	128
5312-5351.....	123
5343-5344, 5348-5349.....	122
5350-5351.....	122
5375.....	128
5380.....	118, 119
5381.....	117
5401-5492.....	59
5421, 5432, 5469, 5492.....	58
5606-5697.....	21
5652, 5655, 5678-5697.....	20
5610.....	59
5701-5795.....	54-55
5710, 5731, 5791.....	53
5703-M-5763-M.....	54, 65
5770.....	4
5759-5782.....	31
5780-5795-00406/07.....	98
5782.....	15
5787, 5788.....	123
5801-5899.....	54-55
5812-00406-5899-00407.....	98

5831, 5880-5899.....	53
5887-M.....	55, 65
5910-5999.....	39
5931, 5953, 5978-599.....	38
5903-M-5948-M.....	65
5978.....	61
6001-6013.....	92
6103-6193.....	34
6107, 6155, 6192.....	33, 34
6103-M-6148-M.....	34, 65
6181.....	15
6187, 6188.....	123
6280-6299.....	33, 35
6300-6399.....	67
6310, 6387, 6397.....	66
6500-6599.....	67
6588, 6593, 6599.....	66
6601.....	59
6604.....	47
6847-05705.....	20-21
6606-05705-6847-05705.....	21
6801-6857.....	59
6857.....	58
6832, 6834.....	47
6834-6835.....	57
6837-05705.....	20
6882-6897.....	94
6900-6999.....	67
6937, 6988, 6999.....	66
7020-7032.....	112
7033-7057.....	113
7040.....	100, 117
7041.....	117
7041-7081.....	110
7070-7099.....	121
7091-7098.....	110
7103-7192.....	41
7131, 7153, 7178, 7192.....	40
7187, 7188.....	123
7288-7299.....	41
7303-7392.....	43
7331, 7353, 7378, 7390, 7392.....	42
7387, 7388.....	123
7488-99.....	42-43
7510-7599.....	31
7531, 7553, 7588-7599.....	30
7601-7691.....	28-29
7684.....	28
7701-7784.....	26-27
7731.....	26
7801-7891.....	29
7832.....	30
7901-7991.....	34
7931.....	33, 34
8001-8098.....	25
8032, 8053, 8079-8098.....	24
8304-8386.....	19
8404-8496.....	18
8504-8595.....	16-17
9105.....	101
9114-9123.....	125
9119.....	21
9133-9135.....	94
9580.....	92
10001.....	119
10002.....	118, 119
10003, 10004, 10005, 10006.....	119
10008, 10010.....	116
10020.....	119
10050.....	118, 119
10100-10129.....	116
10110, 10111, 10183, 10184.....	115
10183-10194.....	114
10200-10205.....	108, 109
10200-10212.....	115
10200-10243.....	114
10402, 10403.....	114, 115
12100-12134.....	116
12180-12195.....	114
12200-12221.....	115
12200-12243.....	114
12201.....	117
13117, 13120, 13121.....	106, 114
13118, 13119.....	115
15002-15021.....	106
15002-15027.....	119



# [HOONIGAN]



2-1/16" WATER TEMP, 100-250 °F, ELECTRIC  
4337-09000



3-3/8" TACHOMETER, 0-10,000 RPM, IN-DASH  
4497-09000



5" TACHOMETER, 0-10,000 RPM, IN-DASH  
4498-09000



3-3/8" SPEEDOMETER, 0-160 MPH  
4488-09000



2-1/16" FUEL LEVEL, 0-93 G, ELECTRIC  
4316-09000



2-1/16" VOLTMETER, 0-18V, ELECTRIC  
4391-09000



2-1/16" OIL TEMP, 100-250 °F, ELECTRIC  
4347-09000



2-1/16" OIL PRESSURE, 100 PSI, ELECTRIC  
4327-09000



2-1/16" VAC/BOOST, 30INHG-30PSI, MECHANICAL  
4303-09000

# BEX Series Battery Charger/Maintainer



BEX-5000

PEACE OF MIND DOESN'T HAVE TO COST A FORTUNE. WHEN YOU'RE READY TO GO FOR A CRUISE, THERE IS NOTHING MORE FRUSTRATING THAN HAVING A DEAD BATTERY OR A LOW TIRE. AUTOMETER HAS YOUR BACK WITH OUR ALL NEW BEX SERIES BATTERY EXTENDERS AND TIRE PRESSURE GAUGES. STARTING AT AROUND \$40, THE BEX-1500 AND BEX-3000 BATTERY EXTENDERS ARE FULLY AUTOMATED SMART CHARGERS WHICH KEEP YOUR ELECTRICAL SYSTEM IN PEAK CONDITION AND ARE COMPATIBLE WITH NEARLY ALL BATTERY TYPES (INCLUDING AGM).

- BATTERY EXTENDERS KEEP YOUR BATTERY AT FULL CHARGE ON A CONTINUOUS BASIS, GREATLY EXTENDING THEIR LIFESPAN.
- COMPATIBLE WITH ALL LEAD ACID BATTERIES (STANDARD, AGM, GEL, ETC.).
- PARASITIC DRAIN PROTECTION.
- FULLY AUTOMATIC "SMART" CHARGING WITH ADVANCED CIRCUITRY ENABLES ENERGY EFFICIENT AND SAFE CHARGING VIA AUTO METER'S ADVANCED SOFTWARE AND DIGITAL CIRCUITRY.
- AUTOMATED DESULFATION TO RECONDITION DISCHARGED BATTERIES.
- RUGGEDIZED AND WATER RESISTANT.
- SPARK FREE CONNECTION AND REVERSE POLARITY PROTECTION.
- CHARGE CURRENT: BEX 1500 1.5 A, BEX 3000 3.0 A, BEX 5000 5.0A.
- PERFECT FOR ANY MOTORCYCLE, BOAT, SNOWMOBILE, CAR, TRUCK, RV, AND LAWN MOWER.
- ULTRA LOW ENERGY USAGE, DEC AND UL 1236 COMPLIANT
- 3 YEAR WARRANTY



BEX-3000



BEX-1500

