


Changing The Lenses:

To Remove Lenses

1




Hold the frame in both hands with the lenses facing out. Press firmly on the top of each lens to “pop” it out of the frame.

2




To Replace Lenses

1

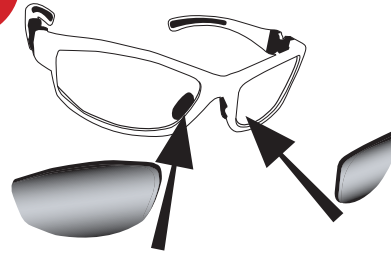

Place the wider edge of each lens in the groove of the frame, closest to the nose piece.


2

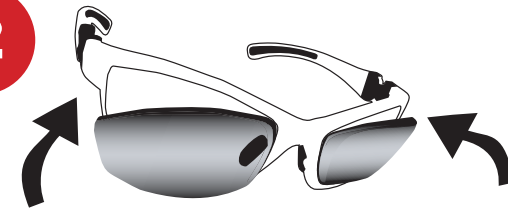

Firmly push the narrow end into the frame groove. Run fingers around the edge of the lens frame to ensure proper fit.


To Remove Temples or Strap:

1

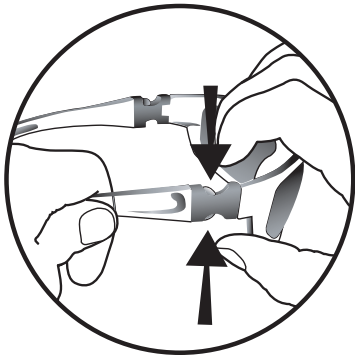


Using two fingers, press the tabs inward on the piece that is being removed.

2

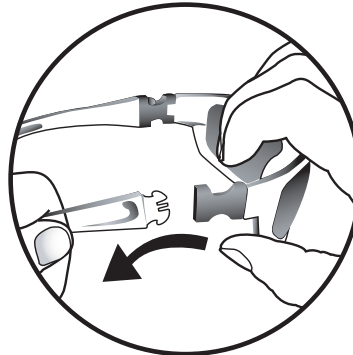

Pull the piece out, away and slightly down from the frame.

3

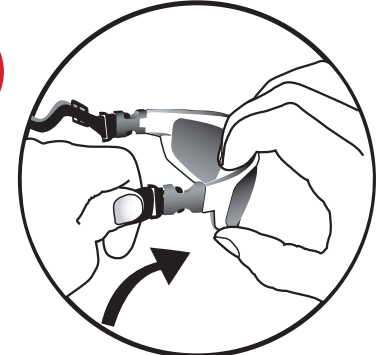


Firmly, push the end piece into out patented QRS (Quick Release System). The end piece will “click” into place.

Inserting or Removing Foam Eye Pad:


To remove foam insert reverse this process.

1

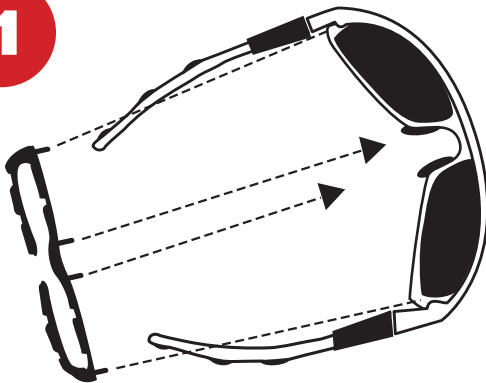


Align the tabs on the foam insert with the holes in the frame.

2

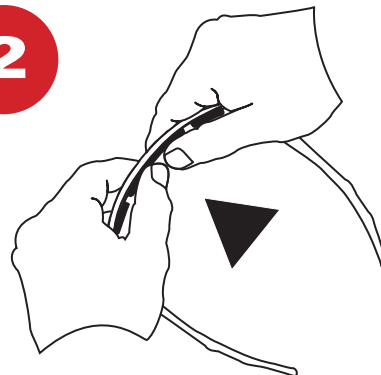

Press the insert into the holes above the nose piece. The Insert will “click” into place.

3

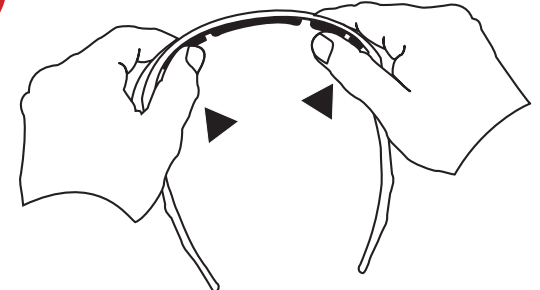

Press the insert into the holes near the temples. The insert will “click” into place.

Rely on premium motorcycle riding gear by Bobster if you're looking for quality and efficiency.