


Inserting or Removing Foam

1. Align tabs on either end of foam to corresponding holes on inside temple of frame



2. Push nose piece upwards into groove in front of frame until foam is secure

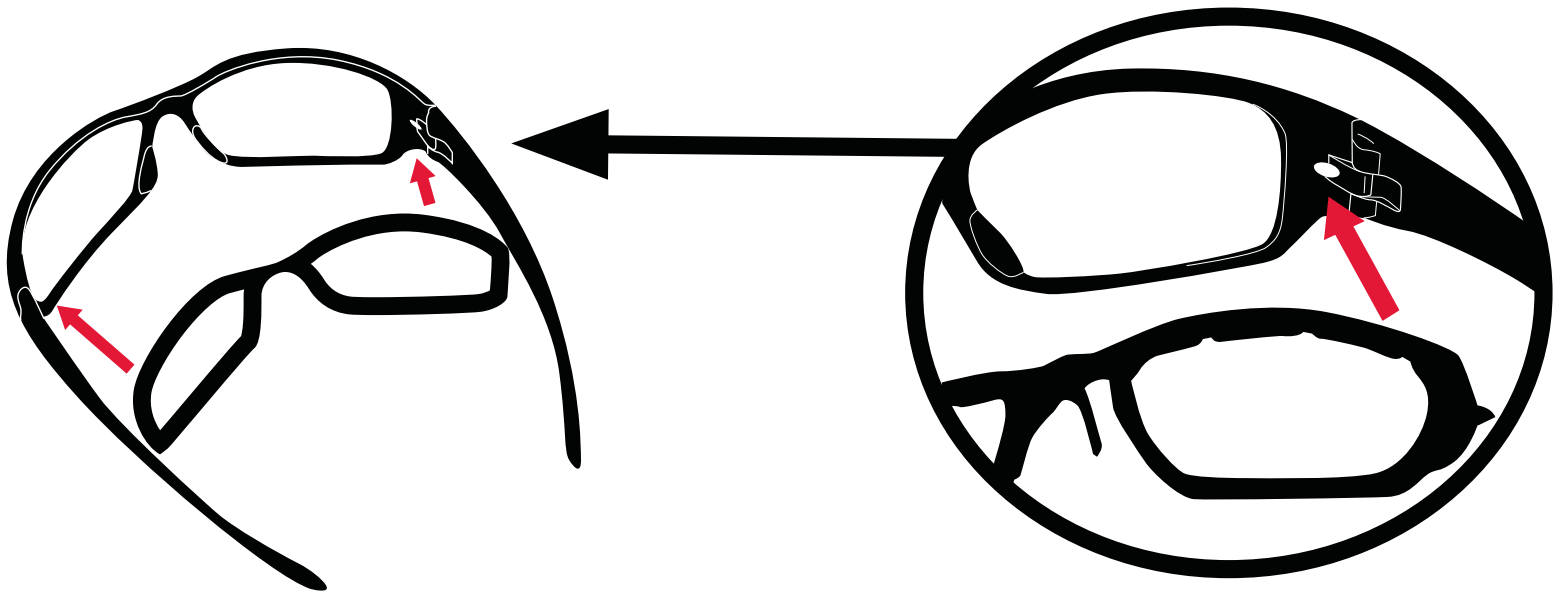