

TAIL TRUNK LOADING CONSIDERATIONS

- NEVER OVERLOAD the Tail Bag. The suggested Tail Bag LOAD LIMIT is 10 lbs. MAXIMUM.
- DO NOT carry sharp, pointed or heavy objects in the Tail Trunk.
- Distribute the load evenly, packing the heaviest items in the bottom of the Tail Bag.

WARNING

BEFORE each ride, check ALL mounting harnesses and retainer straps to be sure they are secure and correctly positioned.

ADDITIONAL PRECAUTIONS

- Before riding WITHOUT Tail Bag installed, REMOVE the retainer straps from the passenger footpegs and rear turn signal stalks and store them with the Tail Bag until needed when you reinstall the Tail Bag.
- Refer to your motorcycle's OWNERS MANUAL for proper suspension settings, tire pressures and payload limits with accessories installed.
- This Tail Bag is Water Resistant, NOT WATERPROOF. If you must ride in rainy weather, it is recommended you take additional precautions. You may order the optional Chase Harper #4100RC Rain Cover (for use ONLY with a fairly full packed Tail Bag); the Chase Harper #3636 Rain Sack (fits inside the Tail Bag and is completely H₂O proof); or you may pack your cargo contents in "plastic trash bags" before putting them in your Tail Bag.

CARE & CLEANING

Use a vacuum cleaner, sponge or cloth and clean water. DO NOT use detergents or harsh chemicals.

PLEASE NOTE:

We cannot assume liability for wear on bodywork and finish, so please use COMMON SENSE and determine for yourself if the bodywork on YOUR motorcycle is prone to damage from typical luggage mounting. IF THIS IS THE CASE, USE EXTRA PADDING TO PREVENT SUCH DAMAGE. Additionally, a protective clear vinyl material is available directly from CHASE HARPER USA

MADE IN USA BY

**CHASE
HARPER
USA**



CHASE
HARPER
USA

ADRIAN SPORTS

#4100 / B-ALASKA TAIL BAG



INSTALLATION INSTRUCTIONS

PLEASE READ and UNDERSTAND the instructions completely before installation to avoid any possible injury to yourself or damage to the accessory or the motorcycle.

DEALER: These instructions contain important information for future reference and MUST be given to the customer.


INSTALLATION

- Attach the mounting loops to left & right attach points; typically the rear attach points are the directional signal shafts and the front attach points are side frame members or rear passenger footpeg brackets, but this may vary depending on the motorcycle model this Tail Bag is being installed on.
- Place Tail Bag over the passenger portion of the motorcycle seat.
- Adjust the mounting straps, and connect to mounting loops.
- Refer to the illustrations for visual directions.

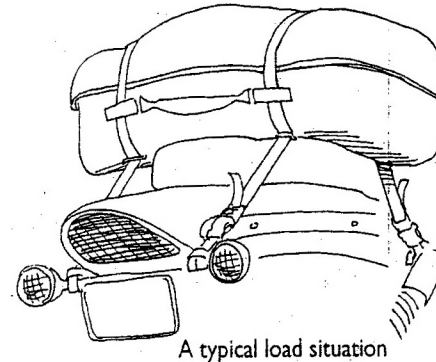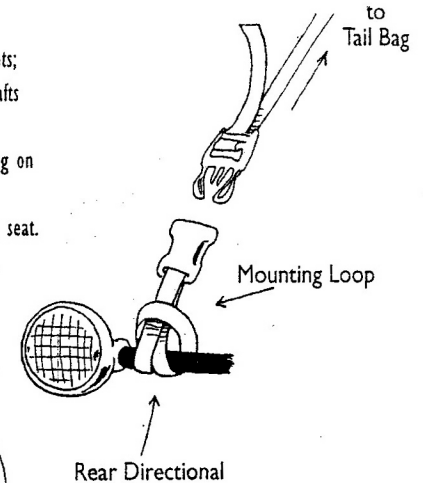

With a small load,
tuck ends underneath

- This Bag can be mounted either perpendicularly across the passenger seat or longways along the passenger seat, depending on the width of your passenger seat and load, or just your own personal preferences.
- If you just have a small load, it is advised that you mount the Bag longways and tuck both ends of the bag underneath it and then cinching the straps. This prevents the load from moving around when you are moving down the road.

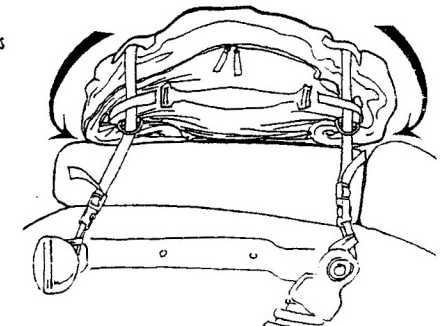

(OVER)