



# COMPETITION WERKES

<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>

(A)

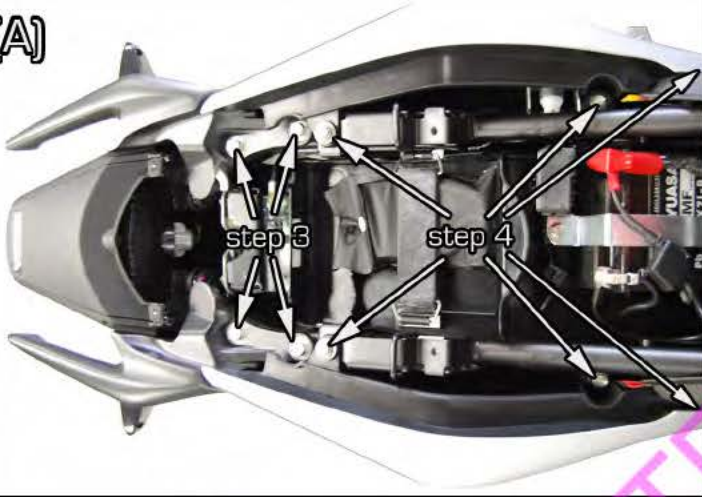

(B)

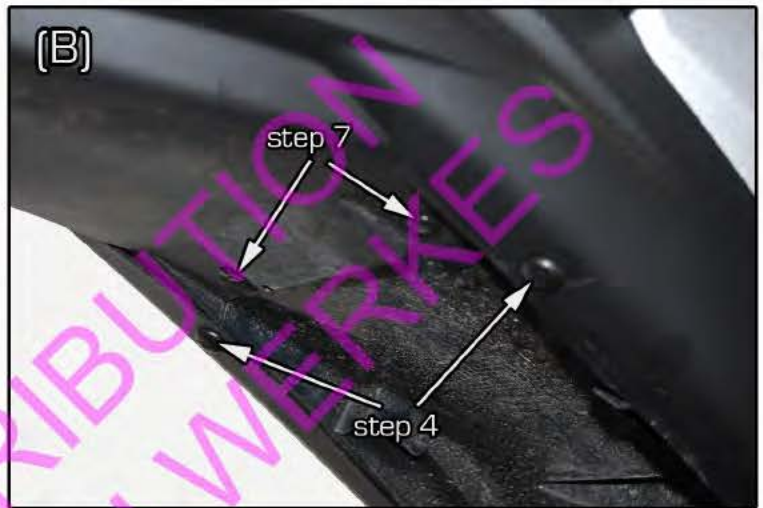

(C)




(D)



(E)



(F)

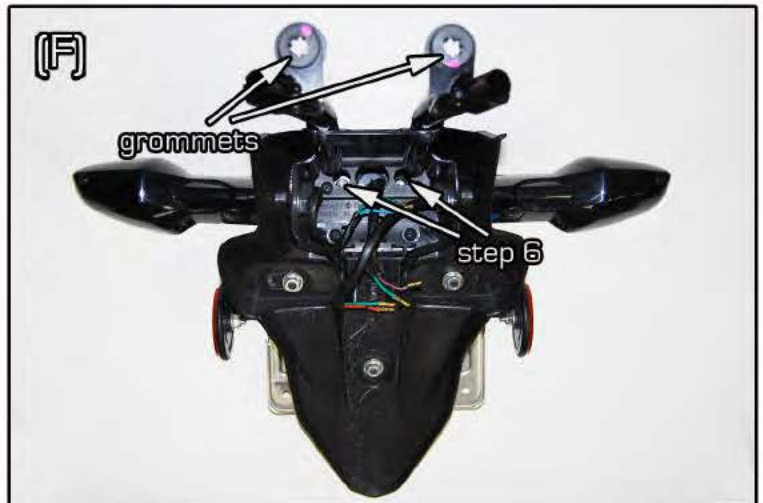

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

1H300



# COMPETITION WERKES


## PARTS LIST:

- 1- Main Assembly   2- Taillight Mounting Brackets   2- Signal Brackets   1- Pair Short Stalk (S-1110-C)  
2- 8x25 Allen Bolts   2- 8mm Washers   2- 8mm Nuts  
2- 6x10 Allen Bolts   2- 6x12 Allen Bolts   4- Washers   4- 6mm Nuts



## REMOVAL:

- 1) Remove rear seat (use key)
- 2) Remove front seat (2- allen bolts).
- 3) Remove grab bars (2- bolts per side) \*FIG (A)
- 4) Remove tail assembly (6- bolts \*FIG (A), 2- plastic rivets \*FIG (B), release seat latch cable and taillight bulb socket) Careful when separating from side panels.
- 5) Remove rear fender assembly (4- bolts \*FIG (C), unplug signals and license light wires).
- 6) Remove license light ( 2- nuts). \*FIG (F)
- 7) Scribe a line across undertray as shown in \*FIG (D).
- 8) Remove undertray (2-plastic rivets). \*FIG (B)
- 9) Cut undertray (follow scribe across). Study \*FIG (E).

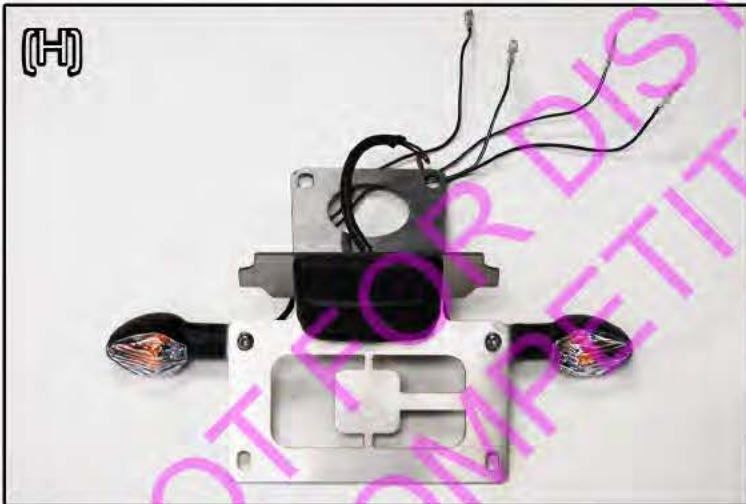

## INSTALLATION:

- 1) Drill 3/8" hole in undertray. (1.5" from cut) \*FIG (E)
- 2) Replace tail assembly (connect seat latch cable, secure with stock bolts and plastic rivets, replace bulb socket).
- 3) Take grommets from rear fender assembly. \*FIG (F)
- 4) Insert grommets into Tail Light Mounting Brackets.
- 5) Position Taillight Mounting Brackets as shown \*FIG (G).
- 6) Secure license light to Main Assembly (2- nuts) \*FIG (H).
- 7) Secure your license plate (2- 6x10 bolts lower holes).
- 8) Mount Signal Brackets (2- 6x12 bolts upper holes).
- 9) Install Short Stalk Signals to Signal Brackets. \*FIG (H)
- 10) Secure Main Assembly to bike (2- stock bolts in rear holes, 2- supplied 8x25 bolts in forward holes).
- 11) Secure Taillight Mounting Brackets (2- 8mm nuts).
- 12) Route turn signal wires through hole drilled in undertray. Reposition undertray to underside of tail and secure with 2- plastic rivets.
- 13) Cut protective sleeve from wiring harness.
- 14) Connect turn signals using supplied connectors.
- 15) Plug in license light.
- 16) Check lighting for proper function.
- 17) Replace grab bars (stock hardware).
- 18) Replace seats.



## HONDA WIRE COLORS:

- Green= Ground      Brown= License/Tail  
Orange= Right      Blue= Left

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.