


	REVISION HISTORY			
REV.	DESCRIPTION	DATE		
01	PRELIMINARY RELEASE PER LM13214	2013-10-28		
Α	INITIAL RELEASE PER LM13214	2013-12-12		

SPECIFICATIONS

1. CERTIFICATIONS:

Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.

- 2. LUMINOUS FLUX: 970 lumens
- 3. ILLUMINANCE: lux
- 4. PEAK BEAM INTENSITY: Candela
- 5. EFFICACY: 57.1 lm/W
- 6. CORRELATED COLOR TEMPERATURE: K
- 7. VOLTAGE (NOMINAL): 12 to 24 VDC
- 8. VOLTAGE (EXTREME): 10 to 30 VDC
- 9. CURRENT (PEAK): 1.2A (@ 12 VDC NOMINAL)
- 10. POWER (MAXIMUM): 17.0W (@ 12 VDC NOMINAL)
- 11. TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
- 12. CONNECTION: 2 CONDUCTOR CABLE
- 13. MOUNTING: BRACKET MOUNT
- 14. HOUSING MATERIAL: ALUMINUM
- 15. LENS MATERIAL: POLYCARBONATE
- 16. PRODUCT WEIGHT: 0.8 LBS (0.36 Kg)

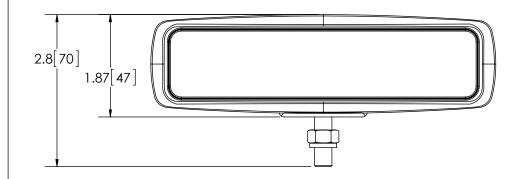

NOTES:

1. DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

NON DISCLOSURE AGREEMENT

THIS DRAWNING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ECCO. AND IS ISSUED IN CONFIDENCE FOR ENCHRERINGDINFORMATION ONLY. THE DRAWNING AND / OR DESIGN ANA YOR IS USED. CONFIDENCE DO ROTHERWISE DISCLOSED IN FOR AS A WHOLE TO OUTSIDERS OF USED FOR ANY OTHER PURPOSE WITHOUT THE PRIVACE WITHOUT FECO. THE DRAWNING IS SUBJECT TO RECALL AT ANY TIME. YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS, © 2013 ECCO.

SCALE 1:1.75				
CAD GENERATED DRAWING			DRA	
DO NOT MANUALLY UPDATE. MODEL REFERENCED:A				
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES ARE:				
MILLIMETERS DECIMALS	INCHES DECIMALS	ANGLES ± 0.5°	ELEC	
XX. ± 1.0mm XX.X ± 0.5mm	X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02	FRACTIONS	TEST	
X.XXX ± 0.02 ± 1/64 THIRD ANGLE PROJECTION				
9				

