
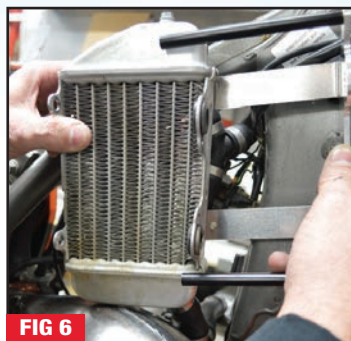
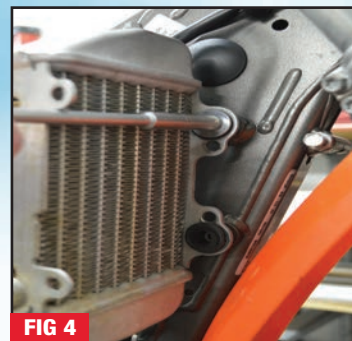


EE Installation Instructions

- 1** Remove the seat using an 8mm socket. (fig. 1)
- 2** Remove the gas tank and shrouds.
- 2a** Turn off the gas and disconnect gas line.
- 2b** Remove the lower shroud mounts using an 8mm socket. (fig. 2)
- 2c** Remove the center bolt on top of the tank using an 8mm socket.
- 3** Remove the radiator louvers. (fig. 3)
- 4** Using an 8mm socket remove the two radiator mounting bolts. (fig. 4)
- 5** Using the provided M6x16mm button head bolts, fasten the radiator rods to the piece labeled 115L1 or R1 (right or left side). (fig. 5)
- 6** Position this assembly between the radiator and the frame as shown. (fig. 6)
- 7** Fasten the radiator and brace into the original mounting position using the provided M6x16mm hex head bolt, 22mm washer and bushing as shown. (fig. 7)
- 8** Connect parts labeled 115L/R2 to 115L/R3 using the provided M6x8mm button head bolts. (fig. 8)

- 8a** Also connect the provided M6 clip nut to this piece as shown. (fig. 9)
- 9** Using the provided M6x16mm and M6x8mm button head bolts connect the assembly "115L/R2&3" to the "115L/R1 assembly" as shown (fig. 10 & 11)
- 10** If not already done so, repeat steps 4-9 on the opposite side of the bike.
- 11** Put the tank, shrouds and seat back on the bike.
- 11a** Note: for ideal fitment you will need to trim the inside of the shroud slightly (fig. 12)
- 11b** Use the provided M6x20mm hex head bolts and supplied washers to connect the shrouds to the M6 clip nuts from Step 8 (refer to fig. 2)
- 11c** Fasten the OEM center bolt securing the gas tank.
- 11d** Re-connect the gas line.
- 11e** Put the seat back on.
- 12** Have fun and ride safe!

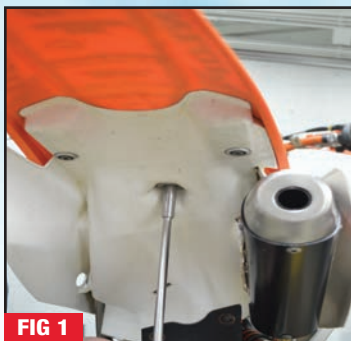

WARNING AND DISCLAIMER

All parts manufactured, designed or sold by Enduro Engineering, Inc. (EEI) are to be installed by a licensed motorcycle dealer or a licensed motorcycle technician. Motorcycles can be dangerous. Serious injury, death and property damage can result from the use of motorcycles. This risk is increased by improper installation or misuse of after market parts. EEI's customers must exercise good judgment in the use, control, alteration, part selection and installation, and maintenance of their motorcycles. In the event of a possible defect in material or design, or any other defect in a part manufactured, designed or sold by EEI, the responsibility of EEI is limited to either a refund of the purchase price or the replacement of the part if EEI determines the part to be defective, and subject to EEI's inspection of the part within thirty (30) days from the date of purchase. (Note: any attempted repairs or modifications made to EEI products will void this limited warranty). EEI, under no circumstances will be responsible for incidental and/or consequential damages, property damage, personal injury damage, or damage, injury, cost or expense of any kind or nature whatsoever. By purchasing an EEI product or a product sold by EEI, you (1) acknowledge the above disclaimer and agree to its terms; (2) agree that any claim brought against EEI arising from and/or pertaining to or otherwise related to a part manufactured, designed or sold by EEI must be brought in the Michigan State Courts located in the County of Ingham or in the Federal District Court for the Western District of Michigan and that Michigan law shall apply on all issues; and (3) any claim against EEI must be brought within one (1) year of purchase of the product. EEI makes no other warranty, express or implied, including without limitation any warranties of merchantability and fitness for a particular purpose. R.JRF.Sec.randt.warninganddisclaimer. 5 2 08



QUALITY OFF-ROAD MOTORCYCLE PRODUCTS

INSTRUCTIONS

EE Installation Instructions

Part# 11-115

Learn more about motorcycle cooling parts we have.