



FACTORY ACTIVATED SEALED BATTERY INSTRUCTIONS


Read and follow the instructions before installing this battery

Valve Regulated, AGM Lead Acid Battery (Factory Activated Sealed)

This battery is factory activated and has been filled with electrolyte and fully charged at the factory.

Prior to installation and before placing the battery into service, the state of charge (open circuit voltage) must be checked with a voltmeter.

A refreshing charge may be required depending on the state of charge. Refer to table on page 2 to determine if recharging is required.

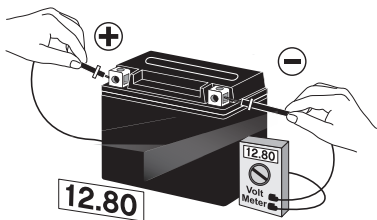

CHARGING METHODS

- If using an automatic type charger, refer to the charger instructions to ensure proper recharging.
- If using a constant current type charger, refer to the charge current (A) shown on the battery or charging rate chart.

State of Charge	Open Circuit Voltage	Status	Charge Time Required (Constant Current)
100%	12.8 or Higher	No Recharge Required	None. Recheck Voltage in 3 Months
75% - 100%	12.5 - 12.8	May require Recharge	3 - 5 hours
50% - 75%	12.0 - 12.5	Recharge	5 - 8 hours
25% - 50%	11.5 - 12.0	Recharge	8 - 10 hours
0% - 25%	11.5 or Less	Recharge	10 hours

Note: Wait for at least 1 hour after battery is removed from charger to check voltage.

CAUTIONS - GENERAL INSTRUCTIONS

- Do not attempt to fast charge or permanent battery damage could result.
- Only use chargers specified for powersports batteries.
- Charge battery before use and during extended periods of inactivity.
- Ensure that the vehicle charging system is functional before installing battery.
- Only Install the correct battery for the application as originally specified by the vehicle manufacturer and position the battery as originally supplied in the vehicle.
- Do not attempt to open or modify the battery in any manner.

INSTRUCTIONS FOR PERIODIC MAINTENANCE

- Always maintain the battery in a charged condition. Do not subject to deep discharge.
- Keep battery clean and free of dirt and grime. Inspect battery for signs of abnormal wear.
- Keep terminals clean and ensure cables are tightly fastened and free of wear or damage.

CONSTANT VOLTAGE CHARGING RATE CHART

Battery Type Number	Volt (V)	Capacity Ah (10HR)	Max. Charge Current
ALL CT2.5L...	12	2.5	0.75
ALL CT4B...	12	2.5	0.75
ALL CT(X)4L...	12	3	0.9
ALL CTZ5S...	12	3.5	1.05
ALL CT(X)5L...	12	4	1.2
ALL CT6B...	12	6	1.8
ALL CTX7...	12	6	1.8
ALL CTZ7S...	12	6	1.8
ALL CT7B...	12	6.5	1.95
ALL CTX9...	12	8	2.4
ALL CT9B...	12	8	2.4
ALL CTZ10S...	12	8.6	2.58
ALL CTX12...	12	10	3
ALL CT12A...	12	10	3
ALL CTZ12S...	12	11	3.3
ALL CT12B...	12	11	3.3
ALL CTZ14S...	12	11.2	3.36
ALL CTX14...	12	12	3.6
ALL CT14B...	12	13	3.9
ALL CTX15...	12	13	3.9
ALL CTX14H...	12	14	4.2
ALL CTH16...	12	14	4.2
ALL CTX16...	12	14	4.2
ALL CTX20...	12	18	5.4
ALL CTX16CL-B...	12	19	5.7
ALL CTX19...	12	19	5.7
ALL CTX18...	12	21	6.3
ALL CTX24...	12	21	6.3
ALL CTX30L...	12	28	8.4
U1-32 (UTV-Yamaha Rhino)	12	32	9.6
51913 (FA)	12	19(20HR)	5.7

DANGER/POISON



SHIELD EYES.
EXPLOSIVE GASES
CAN CAUSE BLINDNESS
OR INJURY.



NO
• SPARKS
• FLAMES
• SMOKING



SULFURIC ACID
CAN CAUSE
BLINDNESS OR
SEVERE BURNS.

**FLUSH EYES
IMMEDIATELY
WITH WATER.**



**GET
MEDICAL
HELP FAST.**



**KEEP OUT OF THE
REACH OF CHILDREN.**




READ INSTRUCTIONS.

DO NOT OPEN BATTERY. DO NOT COVER VENT OPENINGS.
CALIFORNIA PROPOSITION 65 WARNING: Batteries, battery posts,
terminals and related accessories contain lead and lead compounds,
and other chemicals known to the State of California to cause cancer and
birth defects or other reproductive harm. **WASH HANDS AFTER HANDLING.**



**BATTERY MUST
BE RECYCLED**



Pb

**NON-SPILLABLE
AGM BATTERY**

Find out more about powersports batteries we have.