

Power Parts

SXS09065550

SXS09065560

SXS11065500

02. 2011

KTM **POWERPARTS**

Thank you for choosing KTM Power Parts!
 All of our products are designed and built to the highest standards using the finest materials available. KTM Power Parts are race proven to offer the ultimate in performance.

KTM WILL NOT BE HELD LIABLE FOR IMPROPER INSTALLATION OR USE OF THIS PRODUCT. Please follow all instructions provided. Professional advice and proper installation of the KTM PowerParts by an authorized KTM dealer are essential to provide maximum safety and functions.

Thank you.

SXS factory silencer SXS09065550 / SXS09065560

SXS factory exhaust SXS11065500

Read these installation instructions carefully to ensure that the exhaust system is correctly mounted and operated!

⚠ WARNING

The exhaust system can get extremely hot. Allow the motorcycle to cool down before you start work.

We advise you to leave the installation to a qualified service technician. Incorrect installation can result in a shorter service life of the exhaust system and/or damage to the motorcycle.

Preparations

- Jack up the motorcycle.
- Remove the original main silencer.
- Remove the original exhaust.

Mounting the exhaust system


NOTE:

When mounting the exhaust system, initially hand tighten the screws only. After completely mounting the system, align the entire system and tighten the screw connections.

- Position the exhaust and attach the front tab using the original screws.
- Mount the front tension springs (A).
- Using the original screw, screw the exhaust onto the silentblock at the rear.
- Route the exhaust control hose (1) behind the clutch line and mount it on the exhaust with the original clamp (B).

! CAUTION

Avoid contact between the clutch line, exhaust control hose, and exhaust.

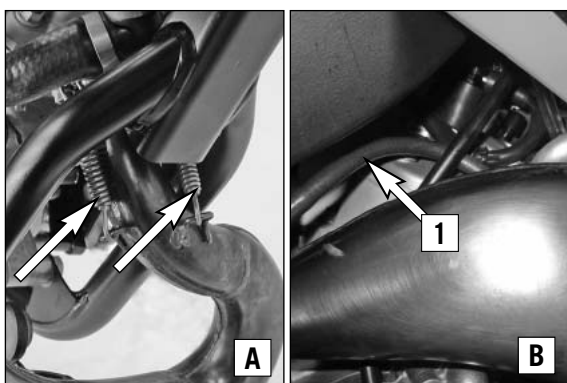

Mounting the main silencer

NOTE:

The collar bushing (4), washer (5), rubber bushing (3), and rubber sleeve (2) of the original main silencer are used.

- Attach the main silencer to the exhaust and mount it on the rear frame (C) with the included screws M6x35 (6) and the new bushing (7).

Be sure to mount the bushings and washer in the right order (D).

- Align the exhaust system and tighten all screw connections.

! CAUTION

When using the main silencer for the first time, the engine rpm must be kept low for roughly the first 5 minutes to evenly heat the main silencer. This ensures that the rock wool will be fully effective and will be able to keep the volume down to the required level.

Maintenance

The rock wool of the main silencer must be replaced every 15 hours during competitive riding and every 30 hours during hobby riding.

