

PERMANENT MOUNT MODELS

Wireless Hand-Held Remote

3000 (white) 3006 (chrome) 3051 (black)

Wireless Dash-Mount Remote

3100 (white) 3106 (chrome) 3151 (black)



Wireless Hand-Held &

Wireless Dash-Mount Remotes

3067 (white) 3066 (chrome) 3049 (black)

Hard Wired Dash-Mount Remote

3020 (white) 3026 (chrome) 3021 (black)



PORTABLE MODELS


Magnetic Base

Wireless Hand-Held Remote

30002 (white) 30062 (chrome) 30512 (black)



Stryker Halogen Light Beam Dimensions

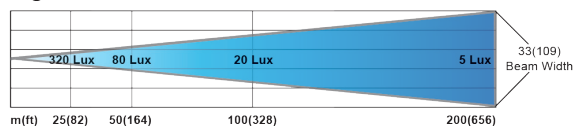


Illuminance (Lux) 320 80 20 5

Peak Beam Intensity: 200,000 Candela

Maximum Beam Distance: 894 m / 2,933 ft

Beam Angle: 10°

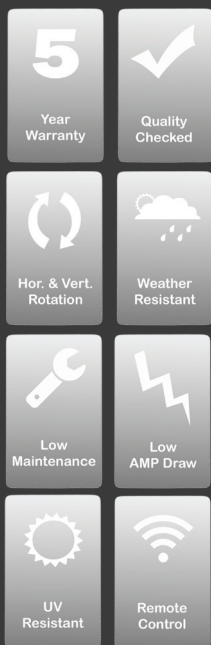

Housing:	ASA Luranheat resistant
	High Impact, UV resistant material
Gears &Transmission Parts:	Lexan and Brass
Fasteners:	Stainless Steel
Motors:	Automotive grade 12V D.C. High Torque, R.P.M. 6087
	Constant Torque 17.133 mN.m/amp, Stall: 12.31 mN.m Draw point 4 amps
	Output: 1.96 watts w/built in stall protection circuitry
	Built in stall protection circuitry
Lamp / Cr5 II Pentabeam :	Phillips 9011 Bulb
Peak Beam Intensity:	200,000 Candela
Max Beam Distance:	2,933 ft.
Reflector:	Computer generated parabolic
Voltage DC:	12V
Power Consumption:	65W
Max current draw:	5.5 amps
Wireless Remote Controls:	Radio Frequency: 433 MHz
	2187 programmable channels
	Transmitter power: 2 Duracell MN21 12v batteries
Warranty:	5 Year Limited Warranty
Mounting Options:	Permanent Mount or Portable Magnetic Base
Rockguard:	Included with all Halogen Styker Models