



FEY-14FZ07-K

PARTS LIST

- Fender Eliminator Brackets 2
- Turn Signal Ears 2
- Washers 2
- Black Countersunk Head Bolts 2
- Black Lock Nuts 2

Fender Eliminator 2014 YAMAHA FZ-07



<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>

NOTE: The instructions in **BLUE** are *optional*. They *are recommended* however.
The instructions in **BLUE** do not need to complete in order to install and use this fender eliminator.

1. Remove the rider and passenger seats.
2. Remove the two top center plastics as well as the right and left tail panels (refer to your service or owner's manual).
3. Remove the two undertail plastics (refer to your service or owner's manual) and discard the piece closest to the tail light (**photo 1**).

5. Remove the OEM license plate holder by removing the (4) 8mm hex head bolts holding the brackets. Support the bracket when removing to prevent it from falling. Keep the stock 8mm bolts for Graves Fender Eliminator installation (**photo 3**).



PHOTO 1



PHOTO 3

4. Un-plug the 2 gray and the 1 black connectors (**photo 2**).

6. Removed the 4 black button head bolts that hold the unit together (turn signals, license plate, and wiring cover).
 - a. To remove the turn signals, pull the plastic keeper plate off on the inside of the turn signal by lifting the rubber tabs and pulling the signal out of the OEM license plate holder. **Keep all parts for Graves Fender Eliminator installation.**

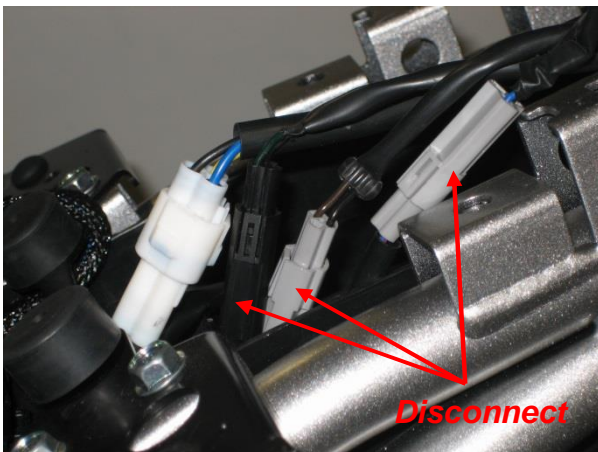


PHOTO 2

The purchaser releases Graves Motorsports, Inc from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident. **This product is intended for Closed Course Competition Use Only** and may render the vehicle illegal for use on public roads.



7. Modify the wiring cover by cutting it where the channel ends on the underside (**photo 4**).

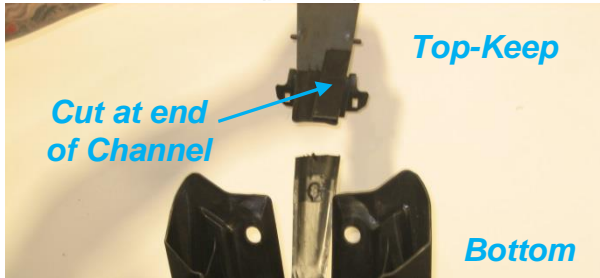


PHOTO 4

- a. Discard the bottom portion that was holding the turn signals and license plate. You will be left with just the top of the wiring cover (**photo 5**).

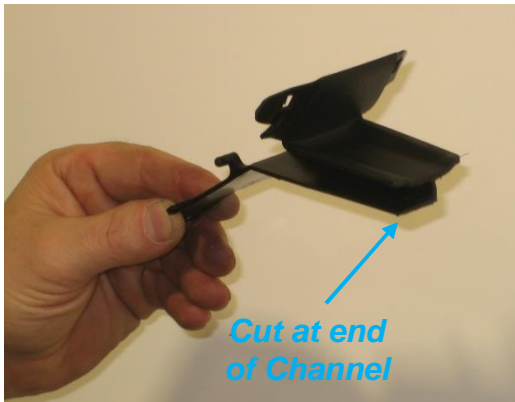


PHOTO 5

8. Bolt the right side bracket onto the motorcycle using the stock 8mm hex head bolts.
9. Take the underside plastic piece and the cut wiring cover and connect them together with the appropriate pop rivet (**photo 6**).

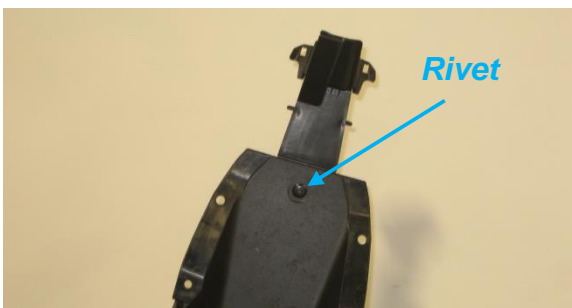


PHOTO 6

10. Slide the riveted pieces into place making sure the pin on the wiring cover is in the hole on the right bracket for proper alignment.
 - a. Hold this in place while you install the left bracket making sure the pin on the wiring cover is in the hole. Secure using the stock 8mm hex head bolts.
 - b. Torque the bolts to factory specifications (refer to your service or owner's manual for torque specs).
 - c. Be sure the tab on the rear light is in the recess on the wiring cover to ensure proper location (**photo 7**).



PHOTO 7

11. Install the turn signals into the turn signal mounts on the Graves fender eliminator the opposite of removal.
 - a. Route the wires to the turn signals through the modified wiring cover then through the square hole in the tail section. Plug them into their corresponding colored plugs.
 - b. If turn signal mounting ears are not desired they can be removed by holding the lock nut on the back with a box wrench and using an allen key to remove the countersunk head bolt.
12. Re-install the tail panels and seats in reverse order of removal (refer to your service or owner's manual).

The purchaser releases Graves Motorsports, Inc from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident. This product is intended for Closed Course Competition Use Only and may render the vehicle illegal for use on public roads.