

**ROKKER® XX Saddlebag
Lid-Speaker Wire Harness
for 2014 And Later Harley®**

#JAWH-HSGU14-SDB

**Installation
and Operation
Instructions**

Product Description

This is a custom plug-n-play wiring harness kit (ONLY) to connect saddlebag lid mounted speakers to our ROKKER XTP or Performance series amplifier kits, on the 2014 and later Harley StreetGlide, Ultra or RoadGlide.

Kit includes exact factory spec wire color coding & plugs for all harness connections, to the saddlebag lid-speaker location, with quick disconnects at the inner saddlebag entry point, to allow for easy removal of the saddlebags.

Installation Instructions

1. Remove both left and right stock saddlebag lids.

2. Remove saddlebags, side covers, seat and fuel tank.

3. Carefully drill a 21mm or 13/16 diameter hole on the backside of the left saddlebag in the location shown. **Diagram A**

4. Install the provided rubber grommet into the hole, with pointed end facing towards wheel. Then, from the inside of the saddlebag, route the left side speaker harness (blue-orange/blue grey). As per **Diagram B**

5. Connect the wire terminal plug to the connector socket of the J&M 5X7" ROKKER XX speaker and route the speaker harness underneath the saddlebag lid tether strap and along the inside of the saddlebag as shown. **Diagram B**

6. Connect the forward section of the saddlebag lid speaker harness to the in-line wire plug and route the harness under the side cover along the frame, under the fuel tank, and into the fairing. Secure the harness using the provided tie-straps. **Diagram C**

7. Install Left side saddle bag.

8. Repeat the entire process for the right side saddlebag assembly.

9. Reinstall the fuel tank, seat, and side covers.

Fig. A

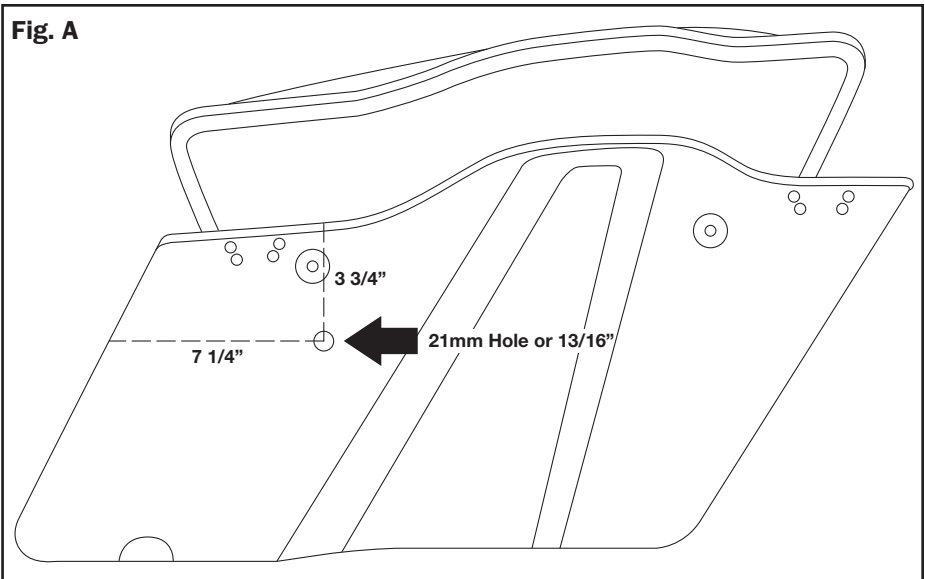


Fig. B

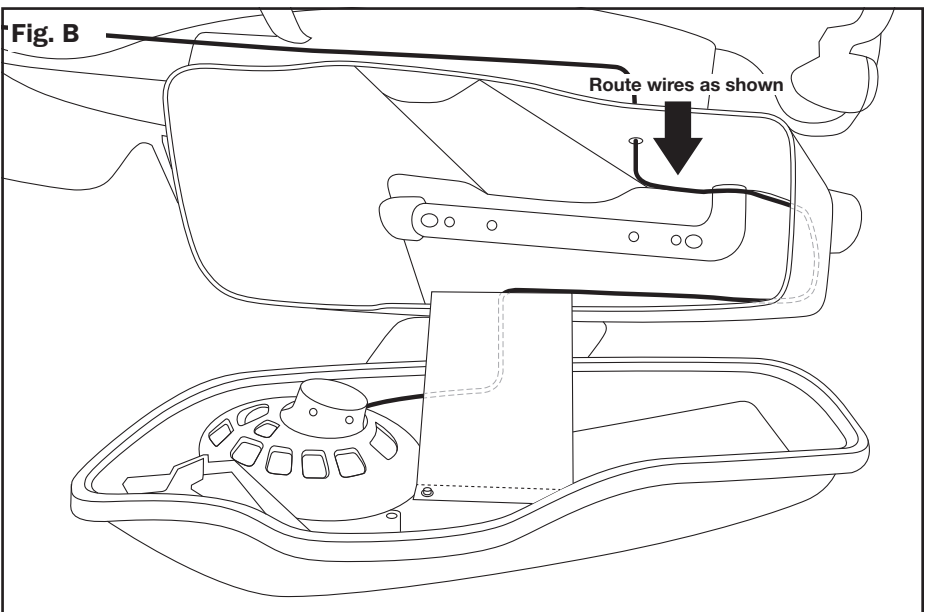


Fig. C

