

PARTS INCLUDED

- 1 - Supersport Fender
- 4 - M6-1.0x16mm Socket Button Head Bolts

TOOLS REQUIRED

- Ratchet
- 10mm Socket
- 12mm Socket
- 14mm Socket
- 4mm Allen Socket






46-4006-03

SUPERSPORT FENDER KIT

**SUZUKI GSX-R600 / GSX-R750
2006-**

INSTALLATION INSTRUCTIONS

- 1) Remove the rider & passenger seat. Remove the tool kit and any other equipment you may have in the trunk area.
- 2) Remove the indicated bolts and push pins from the tail section of the motorcycle. See Figure #1,2,3.
- 3) Disconnect the passenger seat release cable inside the trunk area. See Figure #4.
- 4) Carefully spread and remove the tail section from the subframe of the motorcycle. Disconnect the turn signal wire plugs.
- 5) Disconnect the license plate light plug on the right side of the subframe and feed the wire through the hole in the rear fender. See Figure #5.
- 6) Remove the four bolts securing the original rear fender/license plate mount to the subframe. Remove the rear fender.
- 7) Mount the new Supersport Fender bracket to the subframe using the four supplied M6-1.0x16mm button head bolts. Tighten bolts to 9.5 lb-ft.
- 8) Carefully spread the tail section and place it back over the subframe. Reconnect the turn signal wire plugs.
- 9) Using the original hardware and push pin fasteners, secure the tail section to the subframe. Reconnect the passenger seat release cable.
- 10) Reinstall the rider seat and passenger seat (or rear cowl).
- 11) Turn on the motorcycle and make sure the turn signals are working properly.
- 12) Mount your license plate to the Supersport Fender.

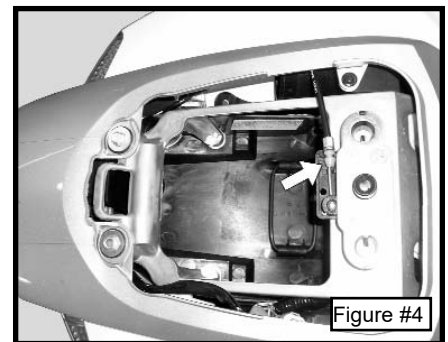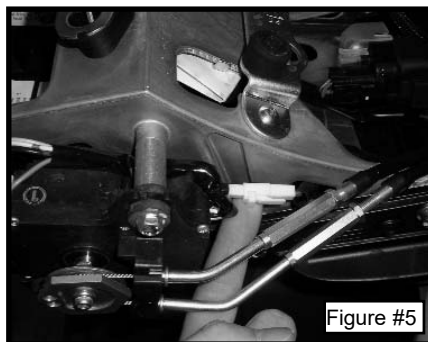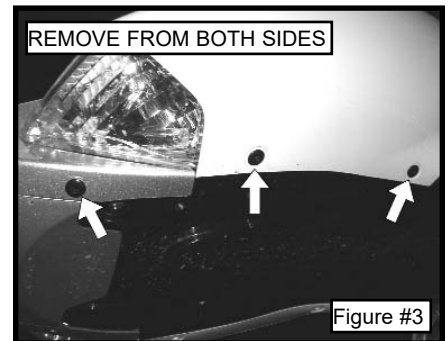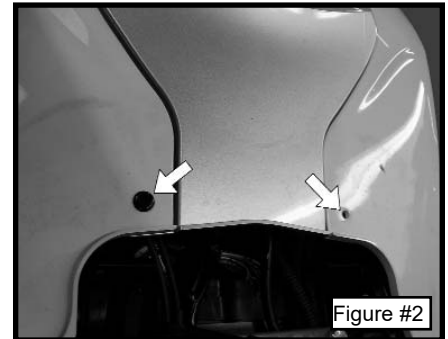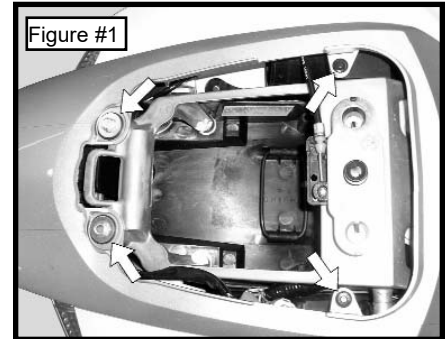

PERFORMANCE DELIVERED!

Learn more about motorcycle parts on our website.