

**PARTS INCLUDED**

| Ref. | Part Number    | Description   | Qty |
|------|----------------|---|-----|
| 1)   | 04-24-46019    | Supersport Fender Bracket                                     | 1   |
| 2)   | 01-44561016662 | Nylon Spacer  | 4   |
|      | 46-0001        | License Plate Bolt Light Kit (Optional, Available Separately) |     |

08-50-46020 REV. A

46-4010-03

## SUPERSPORT FENDER KIT



SUZUKI GSX-R1000  
2009

### TOOLS REQUIRED

| Ref. | Description        | Ref. | Description               |
|------|--------------------|------|---------------------------|
| 1)   | 3/8" Drive Ratchet | 5)   | 10mm Socket               |
| 2)   | 6" Extension       | 6)   | 12mm Socket               |
| 3)   | 5mm Allen Socket   | 7)   | Soldering Iron (optional) |
| 4)   | 8mm Socket         | 8)   | Wire Cutters (optional)   |

### INSTALLATION INSTRUCTIONS

- 1) Remove passenger seat (or rear cowl).
- 2) Remove indicated bolt from left and right side covers, below gas tank. Pull firmly to disengage and set aside. (Fig. 1)
- 3) Remove two bolts securing rider seat. Remove rider seat.
- 4) Remove indicated bolts, and push pin fasteners, from left side of motorcycle tail section (Fig. 2,3,4,5). Pull firmly to release left side tail section from rubber grommets.
- 5) Locate and disconnect the license plate light plug on the left side of the subframe and feed the wire through the hole in the rear fender.
- 6) Remove the stock rear fender by unbolting it from the tail section of the motorcycle, being careful to feed the license plate wire out through the hole in the tail section.
- 7) Thread the original bolts and washers through the mounting holes on the accessory license plate bracket. Place one supplied nylon washer onto each bolt and secure license plate bracket to underside of motorcycle. Tighten bolts to 13 N.m (9.5 lb-ft).
- 8) Using the original hardware and push pin fasteners, secure the left side of the tail section to the subframe.
- 9) Reinstall the rider seat and passenger seat (or rear cowl).

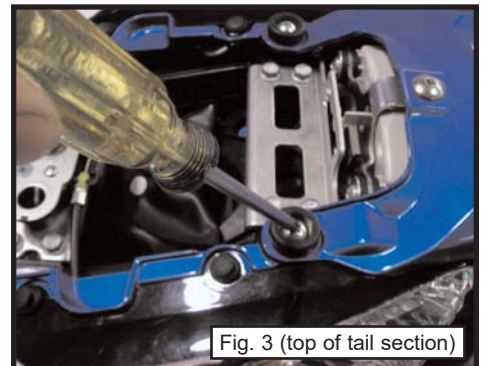
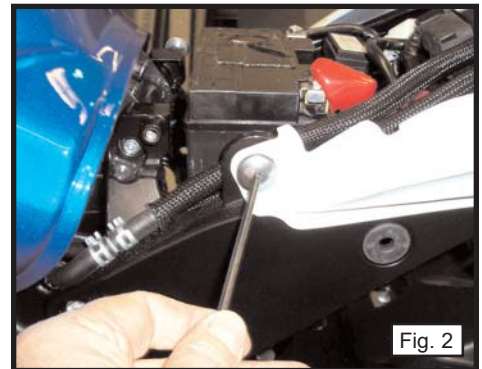


46-4010-03

SUPERSPORT FENDER KIT

SUZUKI GSX-R1000  
2009

- 10) Reinstall the side covers to the motorcycle.
- 11) Turn on the motorcycle and check the operation of the license plate light and turn signals.
- 12) Mount your license plate to the new license plate bracket.

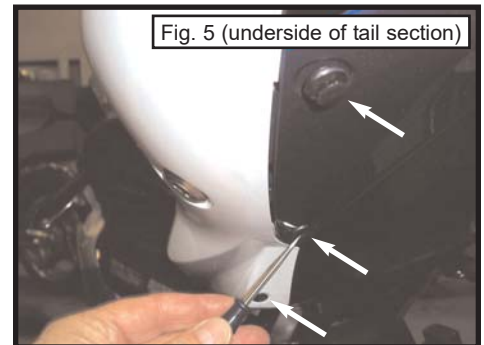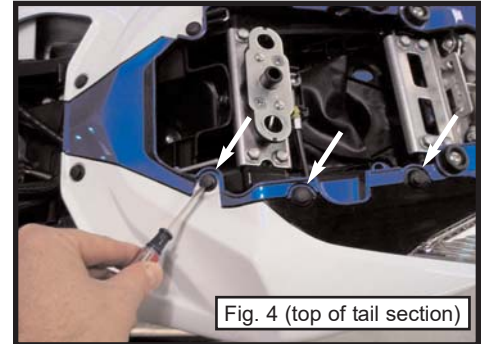

### LICENSE PLATE BOLT LIGHT INSTALLATION (optional, available separately)

- 1) Use the license plate bolt lights to mount your license plate to the Supersport Fender Bracket.
- 2) Locate the now unused license plate light wires inside the tail section.
- 3) Cut and strip the two wires used to power the stock license plate light.
- 4) Attach both the red wires from the license plate light bolts to one of the stripped license plate light wires. Solder the connection and cover.
- 5) Attach both the black wires from the license plate light bolts to the second of the stripped license plate light wires. Solder the connection and cover.
- 6) Turn on the motorcycle and ensure that all lights are working properly prior to riding.

PERFORMANCE DELIVERED!

Learn more about motorcycle parts on our website.