



KC HiLITES

FLEX Single & Dual LED Lights



FLEX SINGLE Part No. 270



FLEX DUAL Part No. 271




FLEX SINGLE & DUAL LED LIGHTS

FEATURES


- Cree XM-L2 U2 LEDs
- 5,700K Color Temperature
- 50,000 Hour LED Life
- Precision Reflector Optics
- Spot Beam Pattern on Flex Single
- Spread Beam Pattern or Spot Beam Pattern on Flex Dual
- Aluminum Housings
- Operates on 9 to 18 Volts
- IP68 Rated
- Protected Against EMI Interference
- Pair Pack Includes Wiring Harness with Waterproof Connectors




PHOTOMETRICS

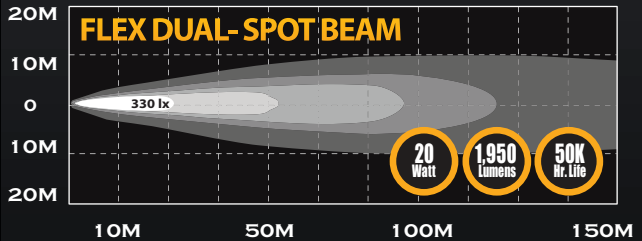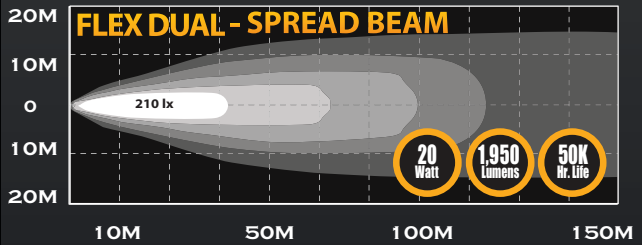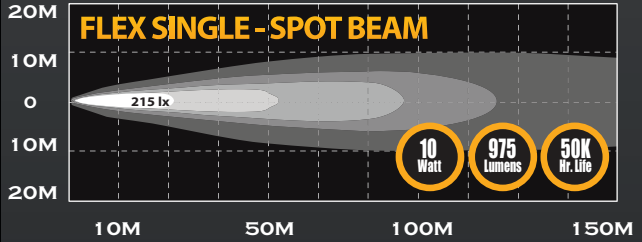

FLEX SINGLE & DUAL LED LIGHT DIMENSIONS



Side view of Dual model



KC FLEX LED SINGLE/DUAL LIGHTS

Pair Part No.	Model / Description	Beam Pattern	No. of LEDs	Watts	Amps	Volts	Lumens	Dimensions			
								A	B	C	D
270	Flex Single LED Light	Spot	1	10	1	9 -18	975	2.92"	2.0"	2.45"	2.25"
271	Flex Dual LED Light	Spot	2	20	2	9 -18	1,950	3.25"	2.0"	2.45"	4.25"
272	Flex Dual LED Light	Spread	2	20	2	9 -18	1,950	3.25"	2.0"	2.45"	4.25"