

KICKER[®]

PS

Coaxial Speakers

PSC65

PERFORMANCE

Woofer Size in [mm]	6 1/2 [160]
Tweeter Size in [mm]	3/4 [20]
Frequency Response Hz	40–20k
Max Recommended Amplifier Power [Watts] PEAK/RMS	120W/60W
Sensitivity [SPL ₀] dB @ 1W, 1m	92.5
Nominal Impedance [Z _n] ohm	2Ω (PSC652), 4Ω (PSC654)
Weight oz [g]	15.2 [430]
Mounting Hole Diameter in [mm]	5 1/16 [128]
Mounting Depth in [mm]	2 [50]
Top Mount Height in [mm]	1/4 [6.5]

WARNING: KICKER products are capable of producing sound levels that can permanently damage your hearing! Turning up a system to a level that has audible distortion is more damaging to your ears than listening to an undistorted system at the same volume level. The threshold of pain is always an indicator that the sound level is too loud and may permanently damage your hearing. Please use common sense when controlling volume.

Package Contents:

(2) PSC65 Speakers	(2) 12" wiring harnesses
(8) M4 x 25mm pan cross head woodscrews	(8) M4 speed nuts
(4) 22ga, red crimp-style butt connectors	(4) Gaskets
(2) Grilles	(2) Kicker badges

INSTALLATION

Please refer to your bike's factory service manual for disassembly/installation information. Typically, you should retain all factory screws, hardware, and grilles when upgrading your bike to a KICKER system. The KICKER PSC65 is compatible with factory locations using the included gaskets. If you are doing a custom installation, be careful not to drill into wiring or vehicle mechanisms. You are solely responsible for securely mounting the speakers. Use the included grilles and screws only when performing a custom installation.


1. Remove your motorcycle's instrument panel according to the manufacturer's service manual.

2. Remove factory speakers.

Remove the screws securing the factory speakers.

Remove the speaker connectors while removing the factory speaker.

NOTE: 2014 Harley Davidson - It is necessary to remove the outer fairing and speaker housings.

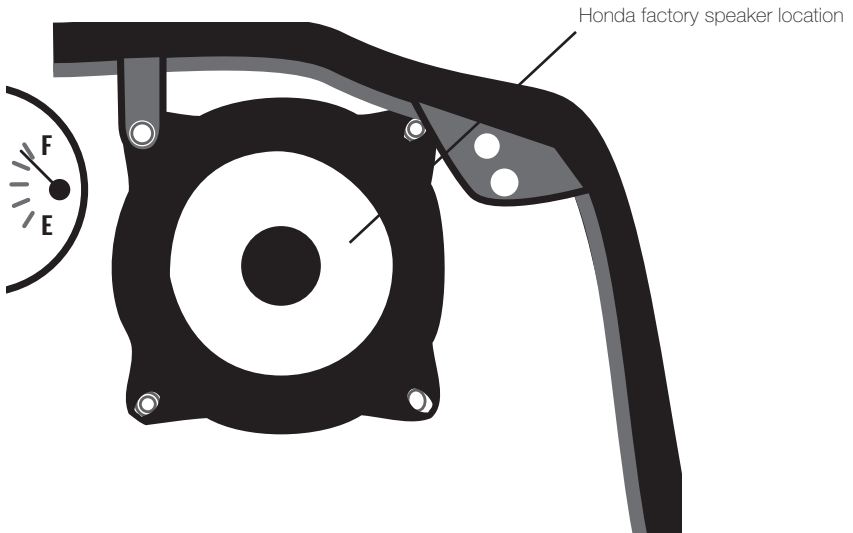


3. Install PSC65 in factory location.

Connect the factory speaker connectors to the PSC65 terminals.

Mount the PSC65 to the desired location with the proper gasket and secure using the factory hardware.

Re-install your bike's access panel in the reverse order you disassembled it.

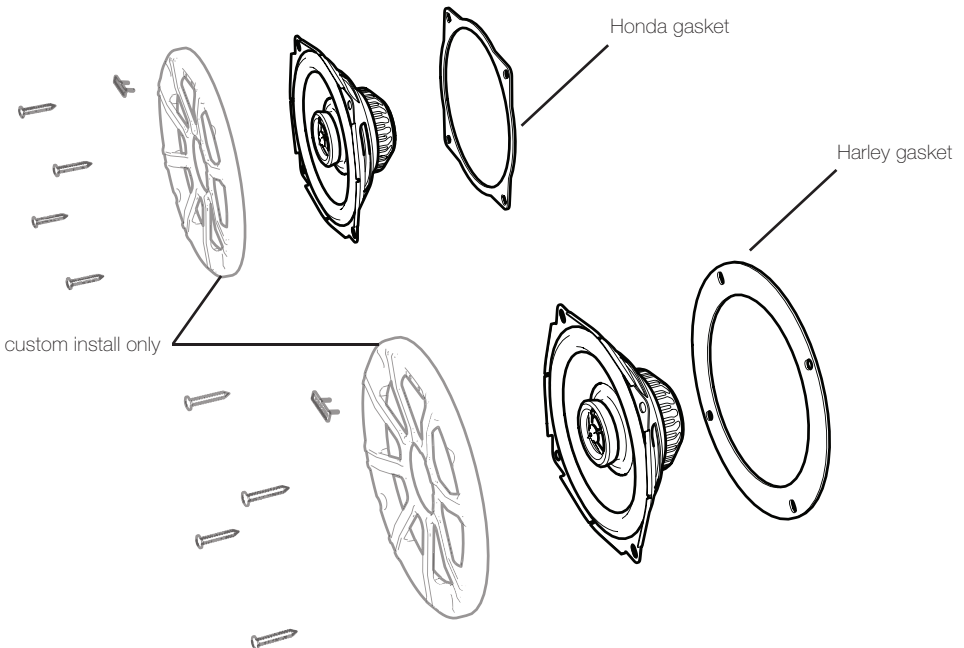

Check out an excellent selection of car speakers we offer on our website.