



INSTALLATION INSTRUCTIONS

Part Number HA-1088

Congratulations, you have purchased the finest [air filter](#) that money can buy. With proper care, this filter can last many seasons. This filter can be used in a stock machine, with no modifications required. If any engine modifications have been made tuning/jetting adjustments may be required. There are special installation instructions, so please follow the procedures outlined below to ensure the K&N Filtercharger® seals properly.

INSTALLATION

1. Remove the stock air filter.
2. Apply the provided K&N Sealing Grease or equivalent to the outside of the flange. (Fig. 1)
3. Install the K&N Filtercharger® flange side first.
4. Reinstall the spring that holds in the air filter.
5. Reinstall the air box lid.

Available to purchase separately

Precharger Wrap; part number 22-8008PK

THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.

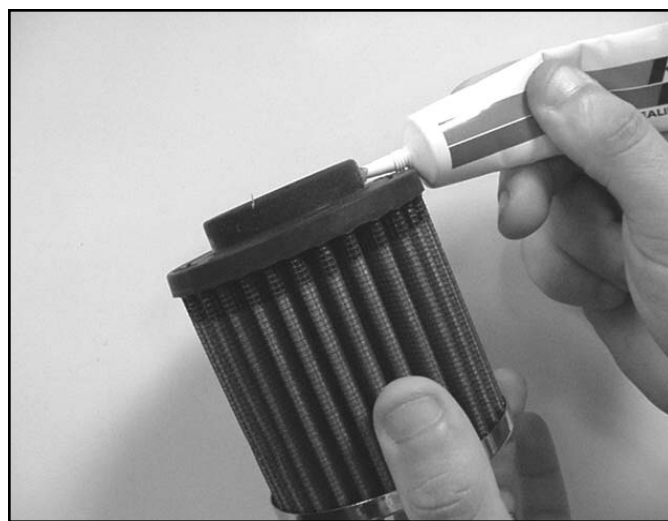


Fig. 1
