



# INSTALLATION INSTRUCTIONS

## PART NUMBER: SU-6505

Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter can last many seasons. This filter can be used in a stock machine, with no modifications required. If any engine modifications have been made tuning/jetting adjustments may be required. There are special installation instructions, so please follow the procedures outlined below to ensure the K&N® air filter seals properly.

### INSTALLATION:

1. Remove the two screws (2008-on models: four screws) on the air box lid. (Fig. 1)
2. Remove the air box lid.  
**NOTE: It may be necessary to lift up on the stock air filter when removing the air box lid. (Fig. 2)**
3. Remove the stock [air filter](#).
4. Remove the stock o-ring in the air box base. (Fig. 3)  
**NOTE: The o-ring must be removed otherwise the K&N® air filter will not completely seal.**
5. Install the K&N® air filter into the air box base making sure it is completely seated. (Fig. 4)  
**NOTE: The marking "TOP" on the K&N® air filter will be at the top of the air box base.**
6. Reinstall the air box lid and tighten the screws.

**THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS RVCED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.**



Fig. 1



Fig. 2

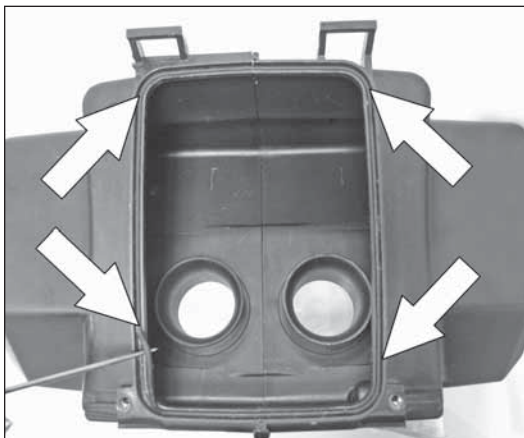


Fig. 3



Fig. 4