



Installation Instructions

Part Number TB-6706

Congratulations, you have just purchased the finest air filter that money can buy. With proper care, this filter will last 1 million miles or more. This filter can be used in a stock machine, with no modifications required. If any engine modifications have been made tuning/jetting adjustments may be required. There are special installation instructions, so please follow the procedures outlined below to ensure the K&N air filter seals properly.

Installation

1. Remove the stock air filter.
CAUTION! When removing the air filter retaining screws make sure they do not fall into the intake trumpets.
2. Remove the stock o-ring from the groove in the stock air filter. (Fig. 1)
3. Reinstall the stock o-ring into the groove on the K&N [Air Filter](#). (Fig. 2)
4. Install the K&N Air Filter into the air box using the six stock air filter retaining screws.
5. Tighten the air filter retaining screws.
6. Reinstall the air box lid and tighten the screws.

THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.

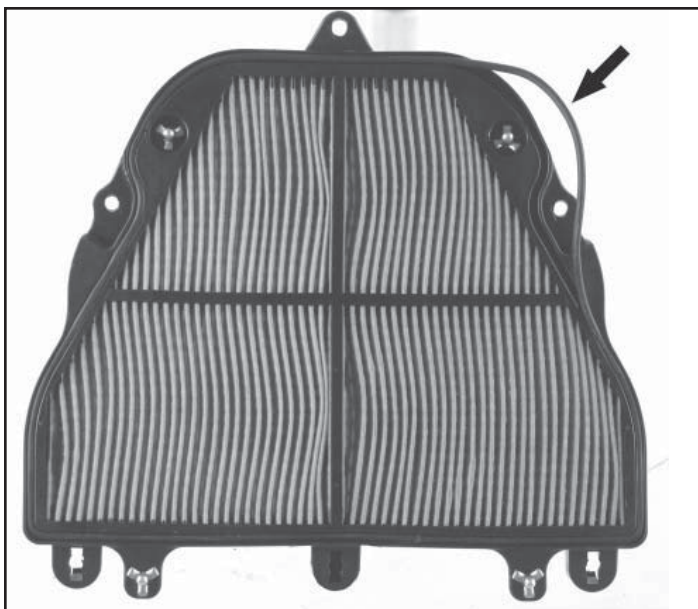


Fig. 1

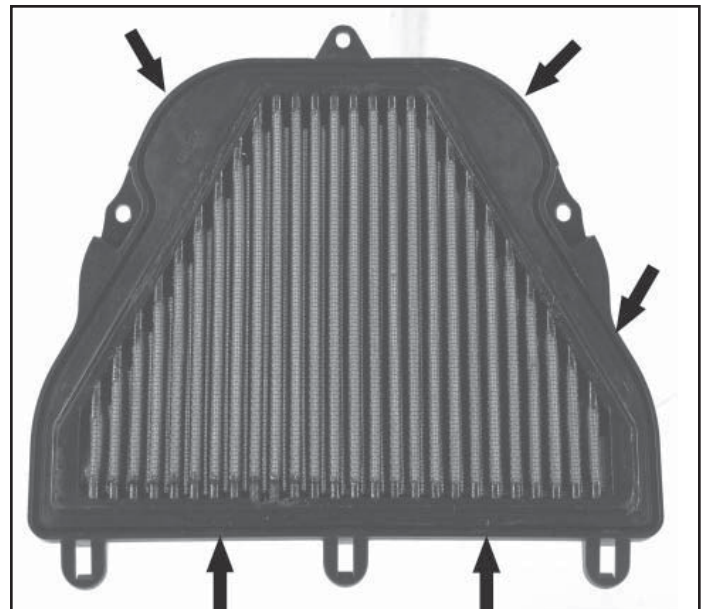


Fig. 2