



INSTALLATION INSTRUCTIONS

Part Number YA-6096

Congratulations, you have purchased the finest [air filter](#) that money can buy. With proper care, this filter will last 1 million miles or more. This filter can be used in a stock machine, with no modifications required. If any engine modifications have been made tuning/jetting adjustments may be required. There are special installation instructions, so please follow the procedures outlined below to ensure that the K&N Filtercharger® seals properly.

1. Remove the stock filter.
2. Carefully clean the inside of the air box.
3. Gently work the smaller folded part of the filter into the sealing groove until it properly seats. (Fig. 1)
4. Bend your K&N air filter as shown. (Fig. 1)
5. Install the front face and rear corners of the K&N air filter into the sealing grooves. (Fig. 2)
6. For correct installation, please reference (Fig. 3)
7. Replace your original air box cover.

**NOTE: When removing filter for servicing, DO NOT PULL FILTER FROM ABOVE BEND LINE.
Remove as shown in Figure 4.**

THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.



Fig. 1



Fig. 2

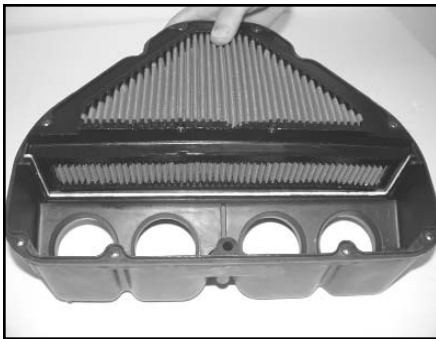


Fig. 3



Fig. 4