



INSTALLATION INSTRUCTIONS

PART NUMBER: YA-8514

Congratulations, you have purchased the finest [air filter](#) that money can buy. With proper care, this filter will last 1 million miles or more. This filter can be used in a stock machine, with no modifications required. If any engine modifications have been made tuning/jetting adjustments may be required. There are special installation instructions, so please follow the procedures outlined below to ensure the K&N® air filter seals properly.

INSTALLATION:

- Due to the taper of the air box and the unique shape of the filter, ensure that the filter is seated correctly into the sealing groove/channel of the air box. When sliding filter into place, check to make sure each side of the filter sits into the grooves of the air box on the left and right side. See Fig. 1 & 2
- When pushing filter down, check to ensure the filter slides into the channel. If the filter does not slide easily, a small amount of lubricant (i.e. Grease, K&N Oil) can be applied to help ease filter into groove in the air box. See Fig. 3

THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.

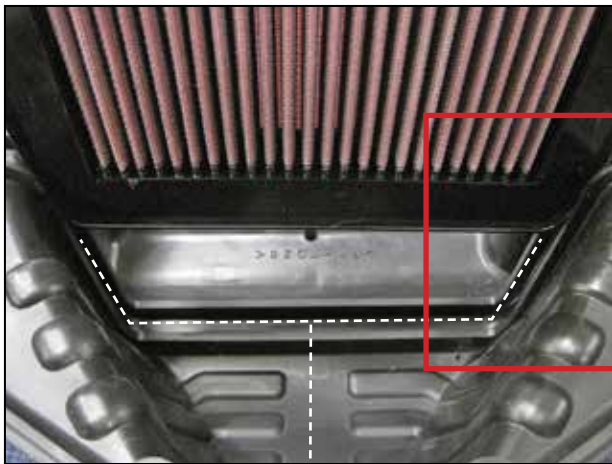


Fig. 1 Sealing Groove in air box

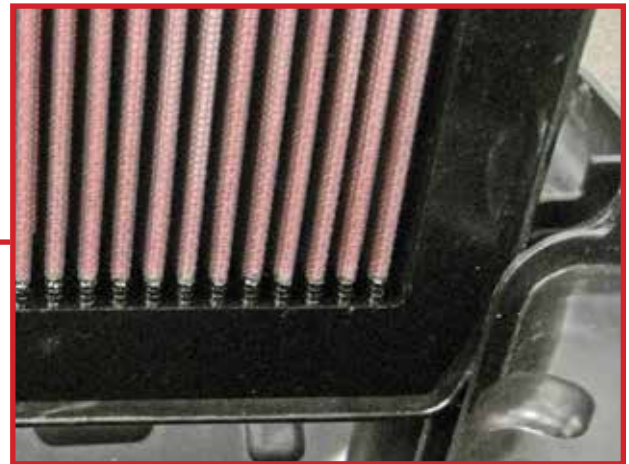


Fig. 2 Filter sitting in groove correctly



Fig.3

Adding lubricant to the sealing surface may assist in filter installation