



CLEANING INSTRUCTIONS

Part Number: YA-4518XD

CLEANING:

1. Pull gas cap cover back and unlock pin to remove airbox cover. Fig. 1
2. To service the unfoiled foam, remove from K&N® plastic frame (Fig. 2), replace with a backup (K&N® Part# 25-4518) or wash to re-use. Wash foam with K&N® filter cleaner or soapy water.
NOTE: The unfoiled foam boosts the filters endurance which extends service interval of your filter. DO NOT OIL FOAM, FOAM MUST BE DRY WHEN INSTALLED.
3. To service filter element, remove the top four screws on the K&N® plastic frame to access filter. Fig. 3 & 4
NOTE: Ensure that K&N® filter needs cleaning before removing plastic frame. The foam might be the only part needing service.
4. Once K&N® filter is serviced using the K&N® Recharger Kit (99-5050 or 99-5000), Lay the flat side of the K&N® filter on the boot. The bottom of the filter should rest against the K&N® mount. Fig. 5
5. Install the K&N® plastic filter frame by angling it over the filter to hinge and lock the two features in the K&N® mount. Use the OE screws to install the frame to the boot. Fig. 5-9
NOTE: While installing the K&N® plastic frame, push the K&N® filter down towards the K&N® mount and ensure filter stays in position. The K&N® plastic frame must be hinged and locked in the mount correctly before screwing the frame on the boot and inserting the foam.
6. Reverse step one to complete cleaning service.



Fig.1



Fig.2



Fig.3



Fig.4

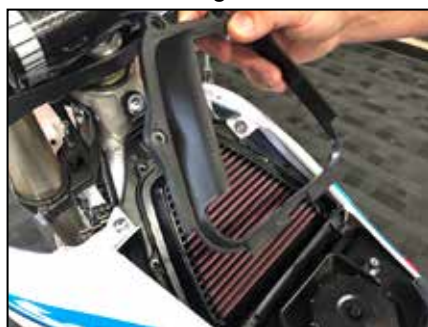


Fig.5



Fig.6



Fig.7



Fig.8



Fig.9