



DRAGON WING – DARK SMOKE

1108

FITS '96-UP FLHT MODELS (FLHT, FLHTC, FLHTCU, FLHX, ETC.)

PARTS INCLUDED

- 1 Right Dragon Wing Assembly – Dark Smoke
- 1 Left Dragon Wing Assembly – Dark Smoke
- 1 Hardware Kit Including:
 - 6 10–24 x 3/4" Knurled Thumb Screw Black
 - 2 Thumb Tab for Dragon Wing
- 1 Installation Instruction

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

ATTENTION! It is the installers' responsibility to make sure all fasteners (including pre-assembled) are tightened before operation of motorcycle. Kuryakyn will not warranty components that are lost due to improper installation. Periodic maintenance may be required.

CAUTION! Clean only with warm water and a mild, non-abrasive soap. Some cleaning products contain harsh chemicals that can severely damage product and void warranty.

TOOLS SUGGESTED

Set of Standard Hex Key Wrenches


STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

PROCEDURE

STEP 1 Remove the three plastic buttons shown in FIG.1. If you have H-D or other aftermarket fairing mount air deflectors, the plastic buttons may have been replaced with thumbscrews. If so, remove the thumbscrews.

-cont.-

FIG.1

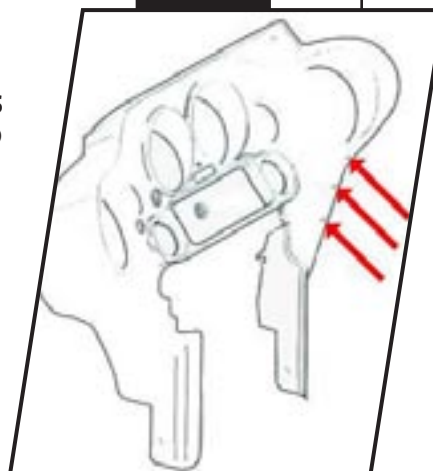

STEP 2 Determine which side is left and which is right. The Fasteners and hinge mechanisms will only be visible from the rider position. See [FIG.2](#).

STEP 3 Starting with the left side, hold the Dragon Wing in place. Line up the mounting holes of the Dragon Wing with the mounting holes in the fairing. Secure the Dragon Wing to the fairing using the supplied 10-24 X 3/4" Knurled Thumb screws. Tighten snugly, but do not over tighten.

STEP 4 Repeat STEP 3 for the right side.

POINTS FOR ADJUSTMENT

Grip the inner "wing" portion of the Dragon Wing. Gently pull the wing downward, toward the ground to free the wing from it's locking mechanism. Rotate the wing into any of the four available positions. Three lockable open positions as well as fully closed. The spring in the lower wing mount will automatically push the wing into the nearest locking position as the wing is rotated.

Ride On!

FIG.2

