



**TWISTED FRONT AXLE CAPS**

**1217**

**FITS: '84-'06 SOFTAIL (EX. SPRINGER, DEUCE) '80-'99 DRESSERS & ROAD KINGS, '91-'03 DYNAS WITH 39MM FORKS, '93-'05 FXDWG, '88-'07 SPORTSTER, '88-'00 FXR, '80-'86 FXWG**

**PARTS INCLUDED**

- 1 Axle Nut Cap, Type A
- 1 Axle Nut Cap, Type B
- 4 10-32 x 1/4" Socket Set Screws (SSS)
- 1 Installation Instructions

*Please read and understand entire instructions before starting installation.*

**THANK YOU FOR CHOOSING KÜRYAKYN!**

**IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.**

**ATTENTION!** This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

**TOOLS SUGGESTED**

Set of hex wrenches

**STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.**


**PROCEDURE**

**STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

**STEP 2** Identify the right side axle cap "A" shown in PIC. 1. Cap "A" will go on the driver's right hand side. Thread the 10-32 x 1/4" Socket Set Screws into the cap and install on the axle with the set screws facing down. Tighten the set screws evenly to prevent the cap from moving.

**STEP 3** Identify the left side axle cap "B" shown in PIC. 1. Cap "B" will go on the driver's left hand side. Thread the 10-32 x 1/4" Socket Set Screws into the cap and install on the axle with the set screws facing down. Tighten the set screws evenly to prevent the cap from moving.

**ATTENTION!** It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.

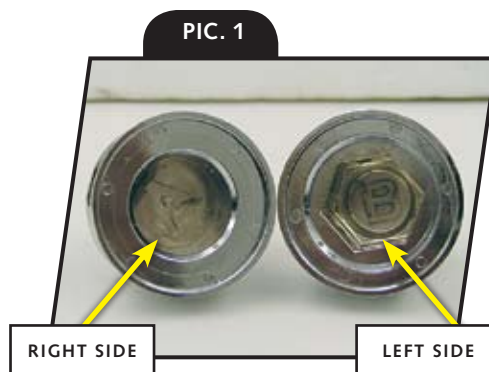

*Ride On!*