



PASSENGER DRINK HOLDER

1482

FITS: '98-UP FLHTCU, '10-UP FLHTK AND '08-'10 FLHTCUSE

NOTE: WILL ALSO FIT '98-UP FLHTC IF EQUIPPED WITH ACCESSORY REAR SPEAKER KIT

PARTS INCLUDED

- 1 Passenger Drink Holder Assembly
- 1 Drink Holder Mount
- 1 Anti Seize Packet
- 1 Passenger Drink Holder Mount Kit
 - 3 1/4-20 x 1-1/8" Hex Head Cap Screws (HHCS)
 - 1 1/4" Wave Washer
 - 1 1/4" Split Lock Washer
- 1 Hardware Kit
 - 2 Shims
 - 1 Thumb Nut
 - 1 5/16" Split Lock Washer
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

**THANK YOU FOR CHOOSING KÜRYAKYN!
IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY
AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION
TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES
REGARDING THE USE AND CARE OF THIS PRODUCT.**

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.


TOOLS SUGGESTED

Socket Set with Ratchet

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

PROCEDURE - *Please note that all hardware included may not be used for installation*

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface; turn off the ignition and allow the engine to cool.

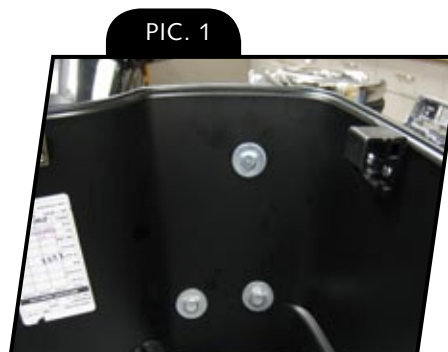

-cont.-

STEP 2 Remove the Tour Pak liner from the bottom of the Tour Pak. Locate the 3 bolts (PIC 1) on the right side.

STEP 3 Remove the 3 bolts with washers, save the washers. The rear speaker box will now be loose.

NOTE The 3 screws will not be re-used.

STEP 4 As shown in PIC 2, place the new Drink Holder Mount between the speaker box and the outside of the Tour Pak.

STEP 5 Using the new 1/4-20 x 1-1/8" HHCS included in the kit and the stock washers, attach the speaker box to the Tour Pak in the stock location (apply anti seize to the threads) with the Drink Holder Mount between the speaker box and tour pak (PIC 3). Tighten the fasteners.

STEP 6 Holding the drink holder, slide the wave washer on to the shaft. As shown in PIC 4, attach the Drink Holder Assembly to the Drink Holder Mount. Slide the 1/4" Split Lock Washer and both shims on to the shaft. Add anti-seize to the threads and secure with the Thumb Nut (PIC 5).

STEP 7 Tighten all fasteners and the Thumb Nut.

ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.

CAUTION! Do not overload the Drink Holder with excessive weight.

CAUTION! The adjustability of the Drink Holder was not intended to prevent spills.

CAUTION! Kuryakyn is not responsible for items that may be stolen or damaged in relation to the use of this product.

Ride On!

Kuryakyn[®]


PIC. 2



PIC. 3



PIC. 4

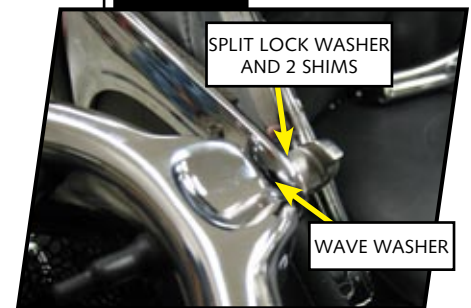

PIC. 5



PAGE

2

PASSENGER DRINK HOLDER

INSTALLATION