



TRIDENT MIRROR

1495

PARTS INCLUDED

- 1 Trident Mirror Assembly
- 1 Hardware Kit, Including:
 - 1 5/16"-18 X 1-1/2" Button Socket Cap Screw
 - 2 5/16" Split Lock Washers
 - 2 5/16" Flat Washers
 - 1 Double End Threaded Stud
 - 1 1/2" Chrome Spacer
 - 1 1/4" Chrome Spacer
 - 1 5/16" Acorn Nut
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND NOTICES REGARDING THE USE AND CARE OF THIS PRODUCT.

NOTICE

This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

NOTICE

IF INSTALLING THIS PRODUCT FOR ANOTHER PARTY, PLEASE MAKE SURE THEY RECEIVE THIS COPY OF THE INSTALLATION INSTRUCTIONS SO THEY ARE AWARE OF THE IMPORTANT INFORMATION CONTAINED IN THEM.

TOOLS SUGGESTED

Set of Hex Wrenches, Set of Combination Wrenches

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

- STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

NOTE: Mirror adapters (sold separately) are required for installation on metric cruisers.

NOTICE

Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.

- STEP 2** Remove the stock mirror from the hand controls; set it aside, it will not be re-used.



-cont.-

MOUNTING STUD INSTALLATION

- STEP 2** Mount the mirror assembly to the short threaded end of the mounting stud and tighten.
- STEP 3** Install one split lock washer and one flat washer over the long end of the mounting stud. PIC 1
- STEP 4** Insert the mounting stud through the mirror mounting hole, if the mounting stud is too long, use the included spacers to shorten the length of the exposed threads.
- STEP 5** Secure the stud from the bottom side using the spacer(s) if needed, then the flat washer, split lock washer and the acorn nut. Finger tighten for now.
- STEP 6** Adjust the mirror as desired. The mounting arm is adjustable by loosening the fastener (PIC 2) on the front side and rotating the arm higher or lower.
- STEP 7** Once the mirror is positioned as desired, tighten all fasteners.
- STEP 8** Adjust the mirrors for proper view before riding the motorcycle.

NOTICE Ensure that the position of the mirror and stem **DO NOT** interfere with the operation of the motorcycle hand controls.

NOTICE It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not provide warranty coverage on products or components lost due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

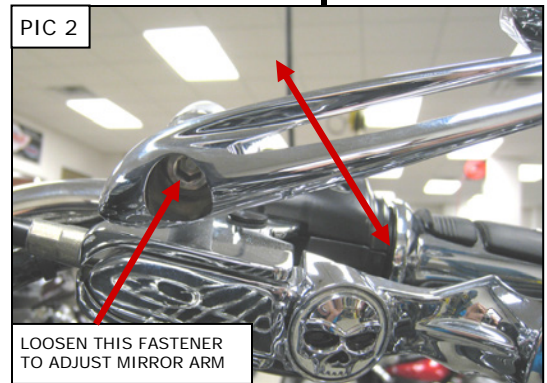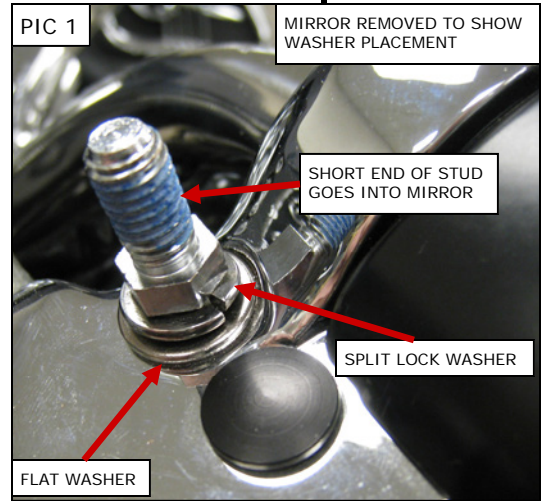

H-D MOUNTING SINGLE SCREW

- STEP 2** From the bottom side, insert the button socket cap screw with a split lock washer and flat washer through the mirror mounting hole, if the cap screw is too long and bottoms out in the mirror before it gets tight, use the included spacers to shorten the length of the exposed threads.
- STEP 3** Place a flat washer then the split lock washer over the spacer(s), if used, on the protruding end of the cap screw.
- STEP 4** Thread the cap screw in to the mirror mount, leave finger tight for now.
- STEP 5** Adjust the mirror as desired. The mounting arm is adjustable by loosening the screw (PIC2) on the front side and rotating the arm higher or lower.
- STEP 6** Once the mirror is positioned as desired, tighten all fasteners.
- STEP 7** Adjust the mirrors for proper view before riding the motorcycle.

NOTICE Ensure that the position of the mirror and stem **DO NOT** interfere with the operation of the motorcycle hand controls.

NOTICE It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not provide warranty coverage on products or components lost due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

Ride On!