

INSTALLATION INSTRUCTIONS

HIGH-INTENSITY L.E.D BULB, 1156, RED

2272

THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

WARNING THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

NOTICE THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 1 High-Intensity L.E.D Bulb, 1156

YOU WILL ALSO NEED:

Tools applicable for removal of turn signal or taillight lens

NOTICE THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

GENERAL INFORMATION REGARDING LOAD EQUALIZERS:

The High-Intensity L.E.D. Bulb is a replacement for stock incandescent bulbs. In many cases, installation does not affect operation of the vehicles lighting. In some cases, the flash rate may be affected and a load equalizer may be necessary.

TURN SIGNAL APPLICATIONS:

- '11-later Softail, '12-later Dyna, '14-later Sportster and Touring do not require load equalizers.
- '10-earlier Softail, '11-earlier Dyna, '13-earlier Touring and Sportster require a load equalizer. We recommend our Self-Regulating Load Equalizer (P/N 5498, sold separately).
- For other makes and models, if the turn signal flash rate is fast or erratic, it will be necessary to add a load equalizer.


TAILLIGHT APPLICATIONS:

- Load equalizers are not required for any taillight applications.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let motorcycle cool.

STEP 2 Installation will vary depending on application.

- Remove taillight or turn signal lens to gain access to bulb.
- Remove existing bulb from socket.
- High-Intensity Bulbs are slightly larger than typical 1156 bulbs. Ensure adequate clearance.
- Install High-Intensity Bulb into socket. Test for proper function.
- Install load equalizer if necessary.
- Reinstall lens.

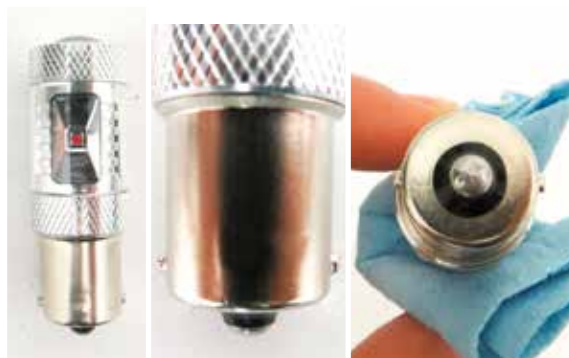



INSTALLATION INSTRUCTIONS

HIGH-INTENSITY L.E.D BULB, 1156, RED

2272

-CONTINUED-

NOTICE

IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT ALL OF THE FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. All warranty claims must be directed to the place of purchase. Merchandise sold through internet auction sites or any other unauthorized reseller shall not carry a Kuryakyn warranty. If unsure, please contact the place of purchase to verify they are an authorized Kuryakyn reseller.