



LICENSE PLATE TURN SIGNAL RELOCATOR

3155

PARTS INCLUDED

- 2 Signal Mount Plates
- 1 Chrome Backing Plate
- 1 Hardware Kit Containing
 - 6 1/4" Flat Washers
 - 4 1/4"-20 Nylon Locking Nuts
 - 4 1/4"-20 x 3/4" Button Socket Cap Screws
 - 4 5/16" Flat Washers
 - 4 3/8" Flat Washers
 - 2 5/16"-18 x 2-3/4" Socket Head Cap Screws
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

TOOLS SUGGESTED

Set of Hex Wrenches, Socket Set with Ratchet or Set of Combination Wrenches

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

ATTENTION! A factory service manual may be helpful in performing this installation. Do not attempt to perform this installation if you are not confident in your ability to complete all of the steps in the procedure; consult a trained technician.

NOTE: A stock H-D license plate mount is shown in the following procedure. Your license plate mount may look different, but the procedure is the same.

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
 - Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
 - Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Kuryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to: control modules, wiring, chrome & other components.
 - Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

-cont.-

CAUTION! Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.

STEP 2 Remove the turn signals from the stock mounting location. Refer to the factory service manual for instructions regarding electrical wiring and removal.

STEP 3 Remove the stock license plate from the mount. Place the chrome backing plate between the license plate and the mount.

STEP 4 Insert the 1/4"-20 x 3/4" button socket cap screws through the license plate, backing plate and in to the mount.

STEP 5 Determine the orientation of the signal mount plates. They can be mounted high or low. PIC 1 and PIC 2

STEP 6 Secure the signal mount plates in place using the 1/4" flat washers and 1/4"-20 nuts. Leave the hardware only finger tight for now.

STEP 7 Center the license plate and backing plate with the mount and adjust the signal mount plates as desired. Tighten all hardware securing the license plate and signal mount plates in place.



STEP 8 Mount the accessory/turn signal lights to the signal mount plates. Make sure that you install the provided flat washers when mounting the turn signals to the curved slot on the mount plates. Refer to the factory service manual for additional installation information.

ATTENTION! Secure all wiring away from any moving parts, pinch points or extreme heat. Kuryakyn **WILL NOT** issue a warranty on any electrical component that fails due to pinched, crimped, broken, abraded, melted or frayed wires.

WARNING! ENSURE PROPER TURN SIGNAL OPERATION BEFORE RIDING THE MOTORCYCLE. VISIBILITY IS A MAJOR CONCERN FOR MOTORCYCLISTS. TURN SIGNAL MALFUNCTION COULD RESULT IN DEATH OR SERIOUS INJURY.

STEP 9 Check and tighten all fasteners.

ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including preassembled) are tightened before operation of the motorcycle. Kuryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.

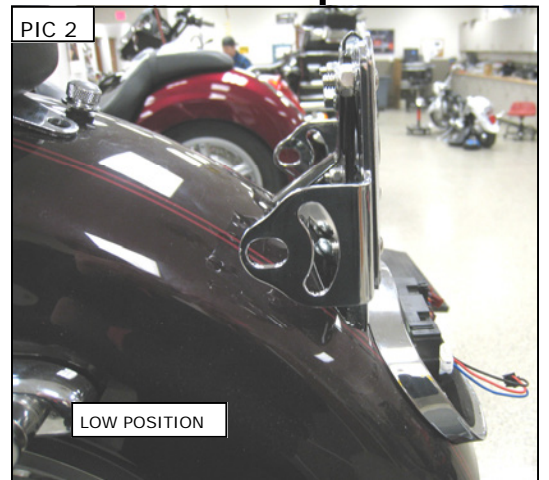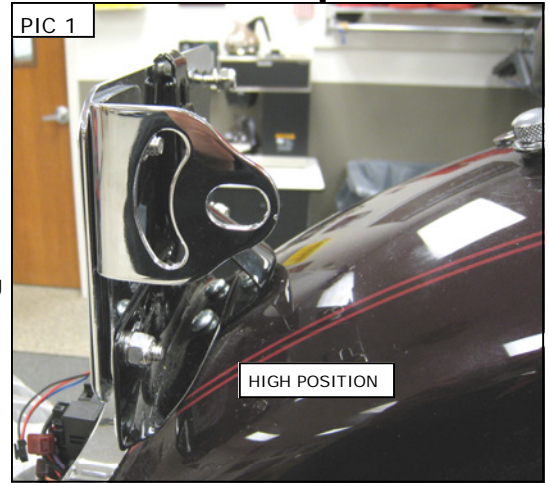

Ride On!

PAGE

2

TURN SIGNAL RELOCATOR

INSTALLATION