



STILETTO SHIFT PEG

4479

PARTS INCLUDED

- 1 Stiletto Shift Peg
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.


TOOLS SUGGESTED

Large Pliers or Vise Grip, Set of Hex Wrenches

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

- STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.
- STEP 2** Remove existing shift peg. The stock peg is secured with a generous amount of high-strength thread locker. Most of the time, the stock shift peg can be grasped with a large pliers or Vice-Grip and removed. Occasionally, it may be necessary to heat the end of the shift lever with a small torch to break the thread locker bond. Once the shift peg has been removed, wipe away the thread locker residue. If necessary, "chase" the threads in the shift lever with a 5/16"-24 tap.
- STEP 3** Using a hex wrench, remove the #5-40 x 1/4" socket head cap screws FIG 1-A securing the pointed end cap FIG 1-B and knurled trim ring FIG 1-C to the shift peg body FIG 1-F. Set these parts aside for now.
- STEP 4** Install the Stiletto Shift Peg. Use a hex wrench to securely tighten the socket head cap screw FIG 1-D attaching the shift peg to the shift lever.
- STEP 5** Install end cap, knurled trim ring, and the #5-40 x 1/4" socket head cap screws.

ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.

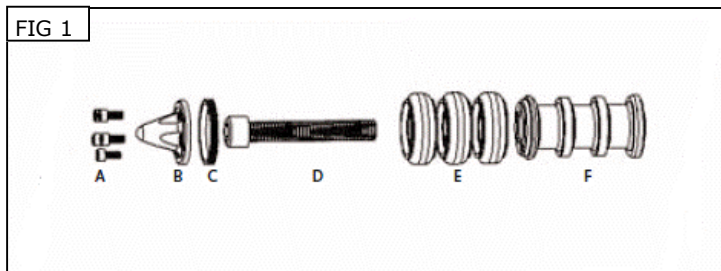

Ride On!