

## INSTALLATION INSTRUCTIONS

XKURSION XS ODYSSEY BAG

5222

### THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

**WARNING** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

**CAUTION** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

**NOTICE** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

### ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- |   |             |   |                                       |
|---|-------------|---|---------------------------------------|
| 1 | Odyssey Bag | 2 | Strap - Double Snap Hooks with Buckle |
| 1 | Rain Cover  | 2 | Strap - Single Snap Hook with Buckle  |
|   |             | 2 | Strap - 1" Wide Hook & Loop           |

#### NOTICE

THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.


#### STEP 1

Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let motorcycle cool.

**CAUTION** KURYAKYN IS NOT RESPONSIBLE FOR IMPROPER LOADS OR UNSAFE POSITIONING OF THE MOMENTUM ODYSSEY BAG. BE SURE THE WEIGHT OF THE CONTENTS IN THE BAG DOES NOT EXCEED SAFE LIMITS. IT IS THE RIDERS RESPONSIBILITY TO DETERMINE WHAT THE SAFE LIMIT IS BASED ON THE POSITION OF THE BAG, PROPER SECURING OF THE BAG AND WEIGHT LIMITS CALLED OUT BY THE MANUFACTURER OF THE MOTORCYCLE.

**WARNING** IT IS THE END USER'S RESPONSIBILITY TO USE COMMON SENSE, FOLLOW THE INCLUDED GUIDELINES, AND ADHERE THE MOTORCYCLE MANUFACTURER'S GAWR AND GVWR (GROSS AXLE WEIGHT RATING AND GROSS VEHICLE WEIGHT RATING), WHEN ATTACHING LUGGAGE TO THEIR MOTORCYCLE. ADDED WEIGHT, SHIFTING LOADS, AND IMPROPERLY ATTACHED LUGGAGE CAN RESULT IN LOSS OF CONTROL LEADING TO DEATH OR SERIOUS INJURY!

**WARNING** PREVENT POTENTIAL SERIOUS INJURY! ENSURE BAG IS FASTENED AND STRAPS ARE SECURE BEFORE RIDING THE MOTORCYCLE.

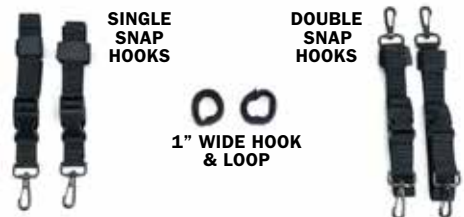

## INSTALLATION INSTRUCTIONS

### XKURSION XS ODYSSEY BAG

5222

-CONTINUED-

#### FEATURES

- UV-rated weather-resistant textile material
- Reflective rain cover, and its own stowaway pocket
- Glove friendly zipper pulls
- Formed bottom for multiple mounting options on a variety of bikes, especially with narrow luggage racks
- Integrated heavy-duty welded D-Rings, sissy bar and mounting straps to mount to additional bags, luggage racks or passenger seats
- Low-profile MOLLE for small accessory attachments
- External quick stash pockets, including a bottle pocket
- Wide front hatch for easy packing and cargo access
- Media storage for 15" laptop and 12" tablets
- Front pocket has a media port for charging and storing access



#### MOUNTING SUGGESTIONS

If applicable, secure bag using adjustable sissybar strap by wrapping straps around or through secured sissybar or backrest.

Using at least four (4) of the adjustable straps included, secure the bag to either a luggage rack, passenger seat base.

Use the D-Rings mounted to the bag to secure the bag to desired mounting locations. Do not secure mounting straps to moving components such as the swingarm, secure it to stationary objects only.

"Pre-load" the straps by applying downward force (without deforming the bag) as the straps are tightened.



D-RINGS

D-RINGS

#### NOTICE

VERIFY THE BAG IS SECURELY ATTACHED BEFORE OPERATING THE MOTORCYCLE. SECURE ALL STRAPS AWAY FROM PAINTED SURFACES, MOVING PARTS, PINCH POINTS OR HEAT. CHECK THE STRAPS BEFORE EACH RIDE AND AT EACH STOP. BAG CONTENTS MAY SHIFT DURING OPERATION WHICH CAN RESULT IN LOOSE STRAPS. ROLL UP ANY EXCESS LENGTH IN ANY OF THE STRAPS, AND SECURE IT TO THE TAUGHT STRAP USING THE ATTACHED HOOK AND LOOP STRAP.

#### NOTICE

IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT ALL OF THE FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.

ROLL EXCESS LENGTH OF STRAP

FASTEN ROLLED STRAP USING ATTACHED HOOK AND LOOP STRAP



OFF-BIKE VIEW OF STRAPS