

INSTALLATION INSTRUCTIONS

SIGNATURE SERIES VANTAGE DASH CONSOLE BY JOHN SHOPE, SATIN BLACK

5627

THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

WARNING THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

NOTICE THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 1 Dash Console
- 1 Bracket
- 1 M6 X 1.0 X 12MM Flat Head Socket Cap Screw

YOU WILL ALSO NEED:

Metric hex wrench set, Torx wrench set

PICTURES SHOWN ARE OF THE CHROME PARTS. INSTALLATION OF THE BLACK PARTS WILL BE THE SAME.

NOTICE THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

- STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let motorcycle cool.
- STEP 2** Remove the seat.
- STEP 3** Refer to PIC 2. Unfasten the existing tank console by removing the rear mounting screw and dart clip, and loosening (not removing) the front shoulder screw located under the handlebars area. Set the rear screw aside, it will be reused. The dart clip will not be reused.
- STEP 4** Disconnect all wired components between the console and wiring harness, and remove the existing tank console from the bike. Set the console with switches aside for now.
- STEP 5** From the rear of the tank remove the tank mounting screws and washers from each side, and heat shields if applicable. Set the hardware aside, they will be reused.
- STEP 6** Refer to PIC 3. Locate provided mounting bracket and the rear screw that was removed in Step 3. Align the single mounting hole side of the bracket with the top of the tank. Lightly fasten the bracket to the tank using the existing screw.
- STEP 7** Align the two holes on the lower end of the bracket with the tank mounting holes. Fasten the bracket to tank using the screws and washers removed in Step 5, reinstall heat shields at this time if applicable. Fully tighten all bracket fasteners.
- STEP 8** Locate provided Dash Console.



INSTALLATION INSTRUCTIONS


SIGNATURE SERIES VANTAGE DASH CONSOLE BY JOHN SHOPE, SATIN BLACK

5627

-CONTINUED-

STEP 9 Refer to PIC 4. Locate the existing dash console. Unfasten the switches from the existing console, being aware of the locations they were originally set, and fasten them to the new console.

If applicable, remove the power source plug from the back side of the old console. Remove the filler plug from the new console and fasten the power source plug into it.

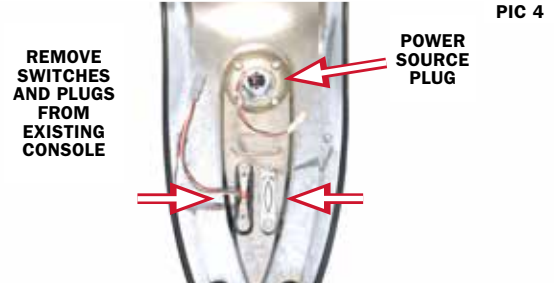

STEP 10 Refer to PIC 5. Align the console over the tank. Connect the wired components of the console to the wiring harness on the bike.

Note: Test the reinstalled wired components to be sure they work before proceeding.



STEP 11 Refer to PIC 6. Align the front mounting hole of the dash console over the shoulder screw located on the front of the tank, located below the handlebars. Slide the mounting hole over the screw and pull the console back to set it in place.



STEP 12 Refer to PIC 7. Locate provided M6 screw. Align the rear mounting holes of the console, bracket, and tank. Insert screw and fasten to bike. Fully tighten hardware.



STEP 13 Reinstall the seat.

NOTICE

IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT ALL OF THE FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.

