

INSTALLATION INSTRUCTIONS

PUSH BUTTON FUEL DOOR LATCH, GLOSS BLACK

7428

THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

WARNING THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

NOTICE THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- | | |
|---|---|
| <ul style="list-style-type: none"> 1 Push Button Latch | <ul style="list-style-type: none"> 1 Hardware Kit, containing: <ul style="list-style-type: none"> 1 Hinge Mount Clip (Early Model - '92-'07) 1 Hinge Mount Clip (Late Model - '08-UP) 1 Hex Nut 2 8-32 X 1/4" Slotted Hex Head Cap Screw (HHCS) |
|---|---|



YOU WILL ALSO NEED:

Combination Wrenches

PICTURES SHOWN ARE OF THE CHROME PARTS. INSTALLATION OF THE BLACK PARTS WILL BE THE SAME.

NOTICE THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

- STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let motorcycle cool.
- STEP 2** Open the fuel door and remove the gas cap. Place a clean dry rag into the filler hole to prevent small parts from falling into the fuel tank.
- STEP 3** Locate the nut on the bottom of the locking mechanism. While supporting the cover, remove the nut with a combination wrench and remove the lock from the fuel door.
- STEP 4** Locate the hinge. Remove the two screws, the fuel door, and the hinge. Make note of the position, and how the hinge is attached, before removing it. Set hardware and hinge aside, they will not be reused.
- STEP 5** Refer to PIC 2. Locate the provided two (2) hinges in the kit. Determine which hinge is specific to the year of your motorcycle by looking at the ends of each hinge.
- STEP 6** Locate provided screws. Reinstall the fuel door and the new hinge in the reverse order that they were removed. Do not over tighten screws.
- Note: Refer to you motorcycle's service manual for assistance.*
- STEP 7** Locate provided Push Button Latch. Install the push button latch into the top of the fuel door then tighten the nut from the bottom. Make sure to support the cover when tightening the nut.

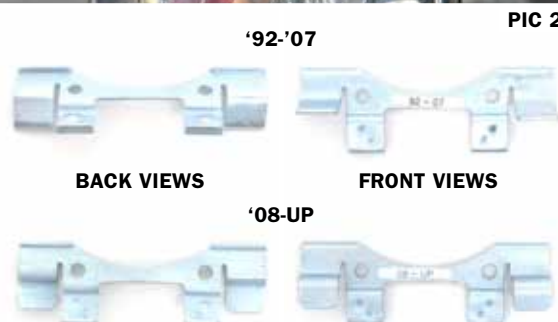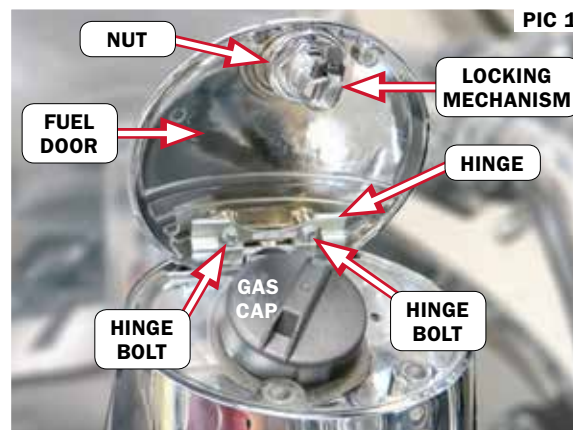



INSTALLATION INSTRUCTIONS

PUSH BUTTON FUEL DOOR LATCH, GLOSS BLACK

7428

-CONTINUED-

STEP 8 Remove rag from gas cap area and refasten the gas cap. Test the operation of the fuel door latch.

Loosen the nut and readjust the lock if the door does not remain closed when shut.

NOTICE

IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT ALL OF THE FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.
