



REAR CYLINDER BASE COVER 8274

PARTS INCLUDED

- 1 Rear Cylinder Base Cover Assembly
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED

Set of Hex Wrenches set of Hex Sockets, Torque Wrench (in/lb)


STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

NOTE: Kuryakyn P/N 8201 (Transmission Cover) was installed on the bike shown.

WARNING! YOU WILL BE WORKING AROUND THE ENGINE AND EXHAUST SYSTEM DURING INSTALLATION. ENSURE THAT THE ENGINE AND EXHAUST SYSTEM HAVE FULLY COOLED TO PREVENT INJURY.

STEP 2 If you have Kuryakyn P/N 8201 it will need to be removed. There are 4 fasteners holding this cover on. The locations are shown in PIC.1.

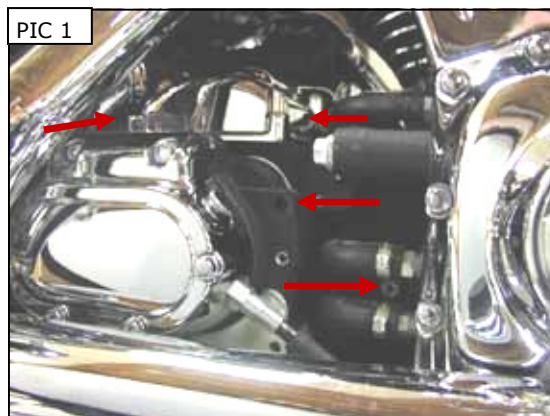

-cont.-

STEP 3 If you do not have Küryakyn P/N 8201 on your bike the first step will be to remove the two fasteners on the front side of the top transmission cover. See PIC.2. These fasteners will be reused.

STEP 4 Set the new cover in place and drop the OEM fastener in the hole on the primary side of the cover. Only finger tighten at this time.


STEP 5 If you have Küryakyn P/N 8201 set it in place.

STEP 6 Install all fasteners finger-tight.

STEP 7 Once all fasteners are in place, torque them to 84–108 inch/pounds.

ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.

PIC 2

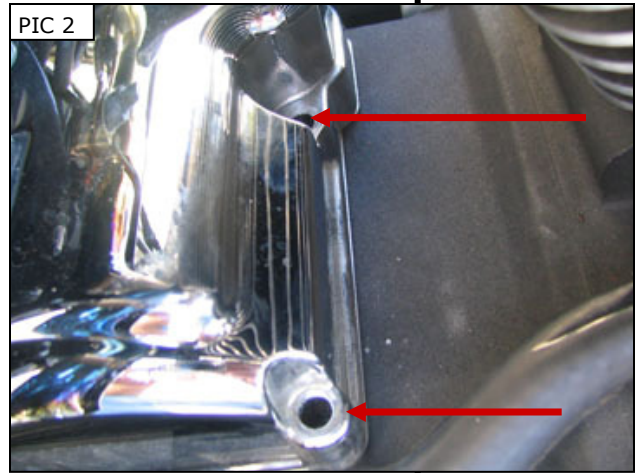

PIC 3

