



THROTTLE SERVO MOTOR COVER

8657

PARTS INCLUDED

- 1 Throttle Servo Cover—for Models with Screamin' Eagle Air Cleaners
- 2 Throttle Body Gaskets
- 2 Breather Shims
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND NOTICES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

NOTICE

This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

NOTICE

IF INSTALLING THIS PRODUCT FOR ANOTHER PARTY, PLEASE MAKE SURE THEY RECEIVE THIS COPY OF THE INSTALLATION INSTRUCTIONS SO THEY ARE AWARE OF THE IMPORTANT INFORMATION CONTAINED IN THEM.

TOOLS SUGGESTED

Set of Hex Wrenches, Socket Set with Ratchet

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

STEP 1

Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

WARNING


YOU WILL BE WORKING AROUND THE ENGINE AND EXHAUST SYSTEM DURING INSTALLATION. ENSURE THAT THE ENGINE AND EXHAUST SYSTEM HAVE FULLY COOLED TO PREVENT INJURY.

STEP 2

Remove the air cleaner assembly. Keep all hardware and items from the assembly for reinstallation.

-cont.-


STEP 3 Remove the backing from one of the included adhesive gaskets and install it onto the mouth of the throttle body, making sure all holes line up. PIC 1

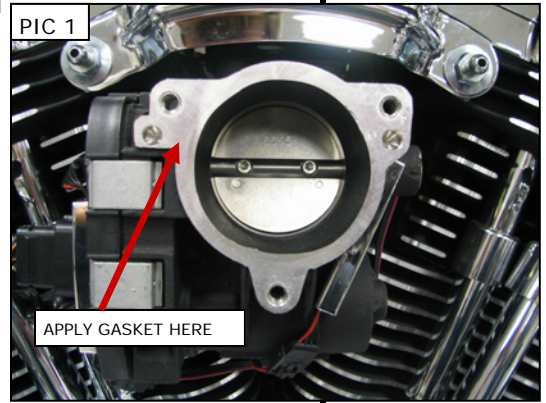


STEP 4 Place servo cover on the fuel injection module making sure all the holes line up. PIC 2




STEP 5 Locate the air cleaner back plate. Remove and discard stock gasket. Remove the backing from the second included adhesive gasket and install it on to the back of the plate, making sure all holes line up. PIC 3

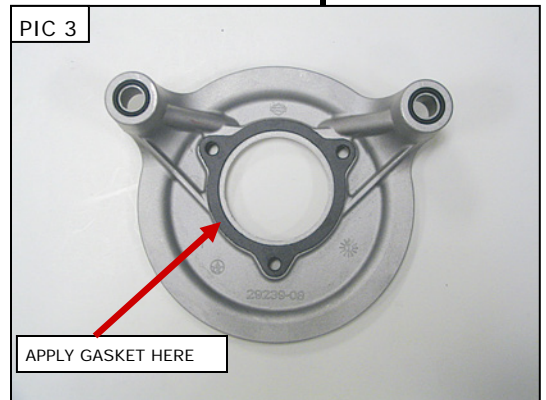

STEP 6 Place back plate over servo cover on bike and thread mounting studs into holes to hold back plate and cover in place. Tighten to 55-60 IN/LBS. PIC 4

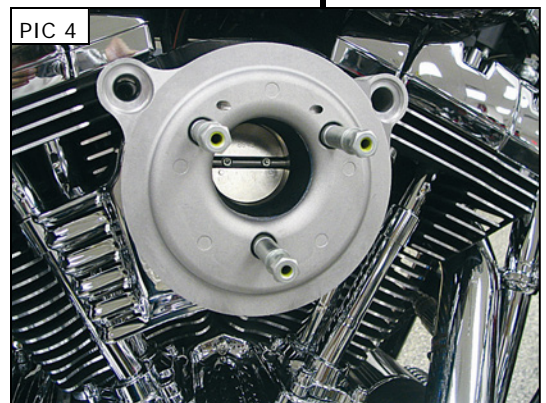

STEP 7 Insert breather bolts through the back plate in the two upper holes. Position one breather shim between the engine and back plate (one on right side and one on left side). Tighten bolts to 120-144 IN/LBS. PIC 5

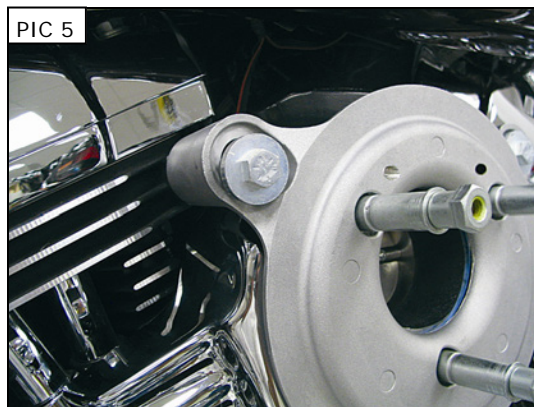

STEP 8 Reinstall Air Cleaner assembly in reverse order from disassembly. Refer to original air cleaner documentation for installation instructions.

NOTICE It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.

STEP 9 Check to make sure that all fasteners are secure and the throttle works freely.

Ride On!