



DRIVER BACKREST

8990

PARTS INCLUDED

- 1 Driver Back Rest Assembly
- 1 Right Side Mounting Bracket
- 1 Left Side Mounting Bracket
- 4 M8 x 1.25 x 80mm Socket Head Cap Screws
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

TOOLS SUGGESTED

Set of Standard Hex Wrenches, Set of Metric Hex Wrenches

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

NOTE: THE POUCH ON THE BACK REST IS NOT REMOVABLE. IT IS PERMANENTLY ATTACHED WITH PLASTIC BUTTON FASTENERS.

STEP 2 Remove the passenger handles from the motorcycle. Using the M8 X 1.25 X 80mm Socket Head Cap Screws, install the mounting brackets as shown in PIC.1.


ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.

-cont.-



STEP 3

PIC.2 shows the Driver Back Rest adjustment hub in the unlocked position. PIC.3. shows the adjustment hub in the locked position (Red Arrow to Red Padlock). Be sure **both** adjustment hubs are in the **unlocked** position for the next step.

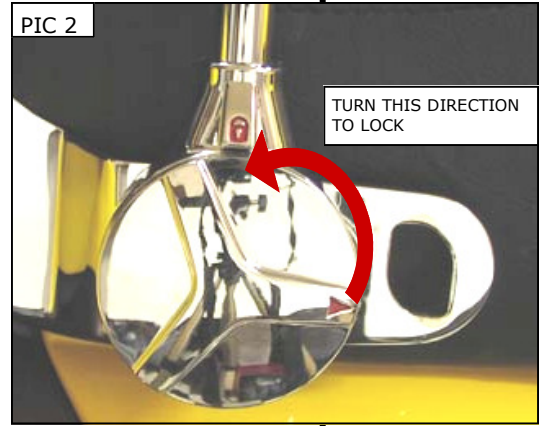


STEP 4

Choose one of the three mounting positions on the mounting brackets. If you are unsure which position will be most comfortable for you then choose the mounting notch in the middle. To attach the Driver Back Rest hold it an upright position and drop the adjustment hubs below the front of the drivers seat. Move the adjustment hubs back toward the mounting brackets being careful not to tear the seat. You must slightly “spring” the arms outward to reach the Left and Right Side Mounting Brackets.

STEP 5

Lock the Driver Back Rest in position by rotating the knob on the outside of the right adjustment hub counter clock-wise. Lock the left side by rotating the knob on the left side adjustment hub clock-wise.

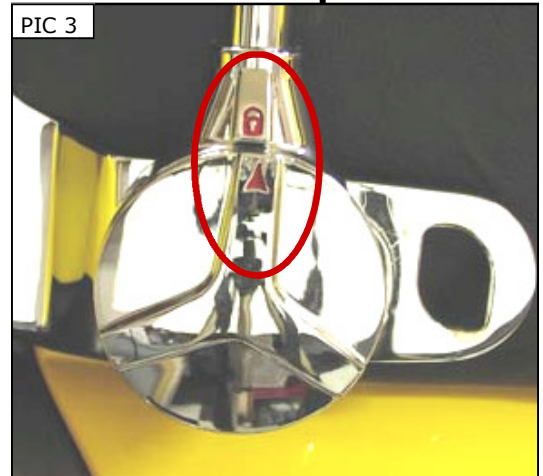

STEP 6

You can adjust the backrest for maximum comfort by unlocking the adjustment hubs, “springing” the arms outward and moving them to the desired position on the Left and Right Side Mounting Brackets.

CAUTION!

Ensure that the installation of this product does not interfere with the proper operation of the motorcycle before riding.

ATTENTION!

It is the installer’s responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.

