



THROTTLE SERVO COVER 08-UP TOURING, CHROME

9845

Thank You For Choosing Kuryakyn!

Protect yourself and others from potential injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

WARNING

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

NOTICE

This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality or damage the product itself or the product to which it is being attached.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 1 Servo Cover
- 1 Cable Tie
- 2 Breather Shims
- 1 Gasket
- 1 Installation Instructions

YOU WILL ALSO NEED:

Socket set, hex wrenches, cutting pliers,

NOTICE

These installation instructions contain important information. Ensure that the end user receives this copy and is aware of its importance for future use.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn **IGN OFF**. Allow the engine and exhaust system to cool. Remove the main fuse.

WARNING



ACCIDENTAL VEHICLE START-UP COULD CAUSE DEATH OR SERIOUS INJURY, REMOVE THE MAIN FUSE BEFORE

STEP 2 Remove the existing air cleaner; remove any existing gasket material from the throttle body flange; ensure the flange is clean and dry.

STEP 3 Remove the adhesive backing from the included Gasket; apply it to the throttle body flange as shown in **PIC 1**.

STEP 4 Secure the servo wiring with the included Cable Tie as shown in **PIC 2**.

Trim the end of the Cable Tie with cutting pliers.

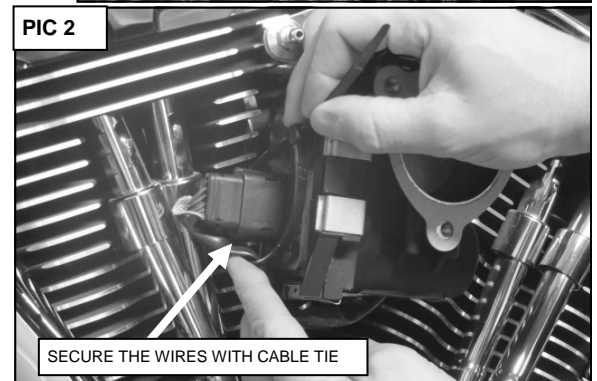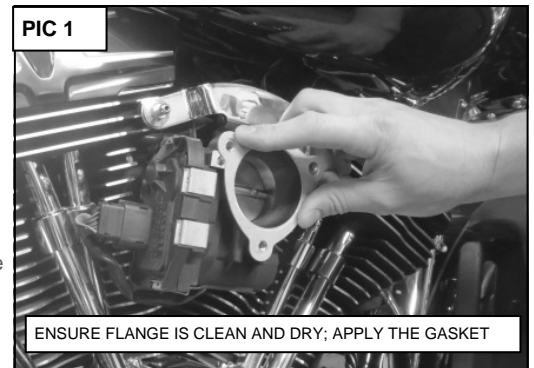



STEP 5 Refer to **PIC 3**. Align the included Servo Motor Cover; install the existing/new air cleaner.

Breather Shims have been included for use with one-piece air cleaner backing plates.

STEP 6 Reinstall the main fuse.



NOTICE

It is the end user's responsibility to ensure that all fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not provide warranty coverage on products or components lost or damaged due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.