




## MOUNTING SUGGESTIONS:

### Suzuki 1400 Intruder '87-04 & S83 '05-08 One-piece Seat

<b>Hardware:</b>	Stock rear fender bolt $\frac{1}{4}$ "-20 x 1" bolt x 2 $\frac{1}{4}$ " zinc washer x 2
<b>Tools needed:</b>	Metric Allen wrenches $\frac{7}{16}$ " wrench

#### Removal of stock seat:

1. Unplug the sissy bar pad, remove the tool kit and the rubber block from the tool box, and locate and remove the rear mounting screw and set aside. This screw will be used to mount your new Mustang seat.
2. Slide the passenger seat forward and up to remove.
3. Note that the ECM is attached to the baseplate of the solo seat. Remove the 10mm bolts from the fender bracket and *carefully* lift the solo off the motorcycle.
4. Before fully removing the solo seat, carefully remove the ECM from the solo seat.
5. Re-install the 10mm bolts into the fender. Route the wires to the outside of the bolts.

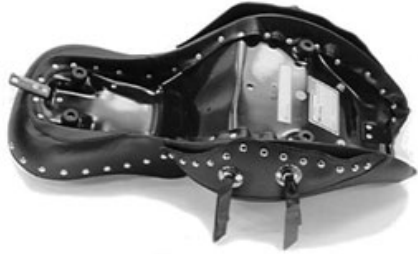

#### Installation of Mustang seat:

1. Bolt the ECM to the baseplate of the seat using the provided  $\frac{1}{4}$ "-20 x 1" bolts and zinc washers.
2. Engage the seat's front bracket into the frame under the tank.
3. Secure the rear bracket to the fender with the stock rear bolt.
4. Reinstall the rubber block and tool kit into the tool box and reinstall the sissy bar pad onto the sissy bar.

**Enjoy the comfort and custom look of your new Mustang seat!**



These steps are guidelines to help you install your new Mustang product.

Refers to part number: 75261, 75265, 75879