



## MOUNTING SUGGESTIONS:

### Honda VT750 Aero 2004-2017 Solo and Passenger Seat

<b>Hardware:</b>	<b>Solo seat:</b> Stock side Allen bolts x 2	<b>Passenger seat:</b> Stock rear bolt
<b>Tools needed:</b>	Metric Allen wrenches	

#### Removal of Stock Seat:

1. Locate and remove the two side mount screws and rear bolt using Metric Allen wrenches. These will be used to mount your Mustang seat.




2. Lift the stock seat up and back to remove from motorcycle.

## Installation of Mustang Seat:

1. If installing solo and passenger, insert front tongue of passenger seat into the slot in the back of the solo to create a one-piece unit.
2. Slide the solo's front bracket into the frame mount under the gas tank. Be sure it does not hook under the tank flange instead.
3. Push the seat forward until the two side brackets are aligned with the motorcycle's side mounts.



4. Insert the two side mounting screws through the motorcycle and seat mounts. If installing a passenger seat, keep these loose for now.
5. Push the passenger forward until the rear bracket aligns with the fender mount.

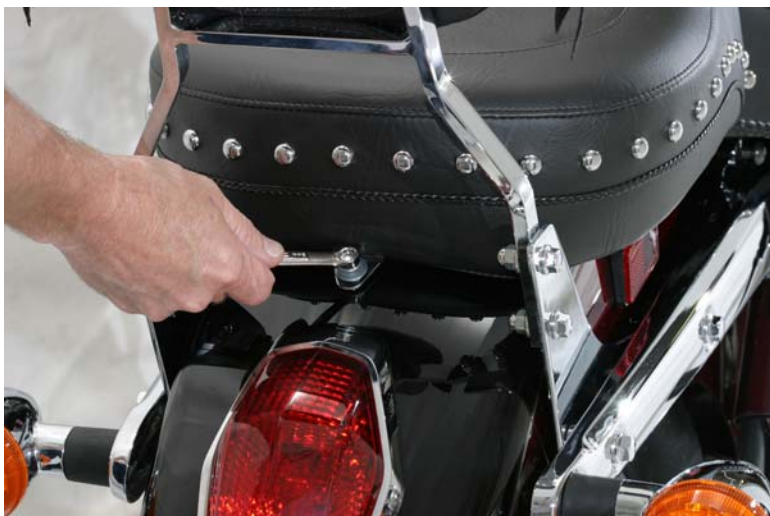

6. Insert the rear fender bolt through the passenger seat bracket. Tighten securely.

7. Securely tighten the two side mounting screws.

**Enjoy the comfort and custom look of your new Mustang seat!**

