

## NAMZ 2011 FLST & FXST Handlebar Wiring Extensions, Plug-n-Play Part Number: NHCX-J04 to J15

- 1. YOU SHOULD DISCONNECT THE BATTERY FIRST!
- 2. Keep in mind that the wiring harness and control system for ALL 2011 FLST & FXST models are totally different than earlier models.
- 3. When replacing your handlebars, locate the new, very small (black) 4-position male and female connectors located under the front of the fuel tank.
- 4. (*Pic.* 1 & 2) Once found, disconnect the male and female connectors. (Orange/Red, Black & White/Red White/Black twisted pair.)

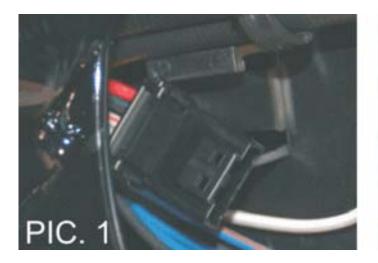



- 5. The male connector (PIC 1) is attached to the main wiring harness and the female connector (PIC 2) is attached to the handlebar switches.
- 6. Our switch extensions are 100% Plug-n-Play" and are designed to do just that. The connectors are also small enough to go into <u>most</u> handlebars for ease of hiding wires.
- 7. Now simply re-connect, using our extension wiring and be sure the connectors are seated properly and cannot be pulled apart without releasing the lock.
- 8. Before completing your installation, re-connect the battery and test ALL switch functions