



INSTRUCTIONS

NR-USA Under Seat Attachment


Please read instructions carefully before installation. We recommend this product be installed by a qualified and experienced motorcycle technician. If you are unsure of any of the below directions and/or your ability to correctly and securely install this product, please contact us or your local dealer for help. Below diagrams show typical installation, your motorcycle may be different so please use diagrams as a guide. Make sure your motorcycle is clean and free from dirt, road grime, etc. where the Nelson-Rigg luggage mounts.

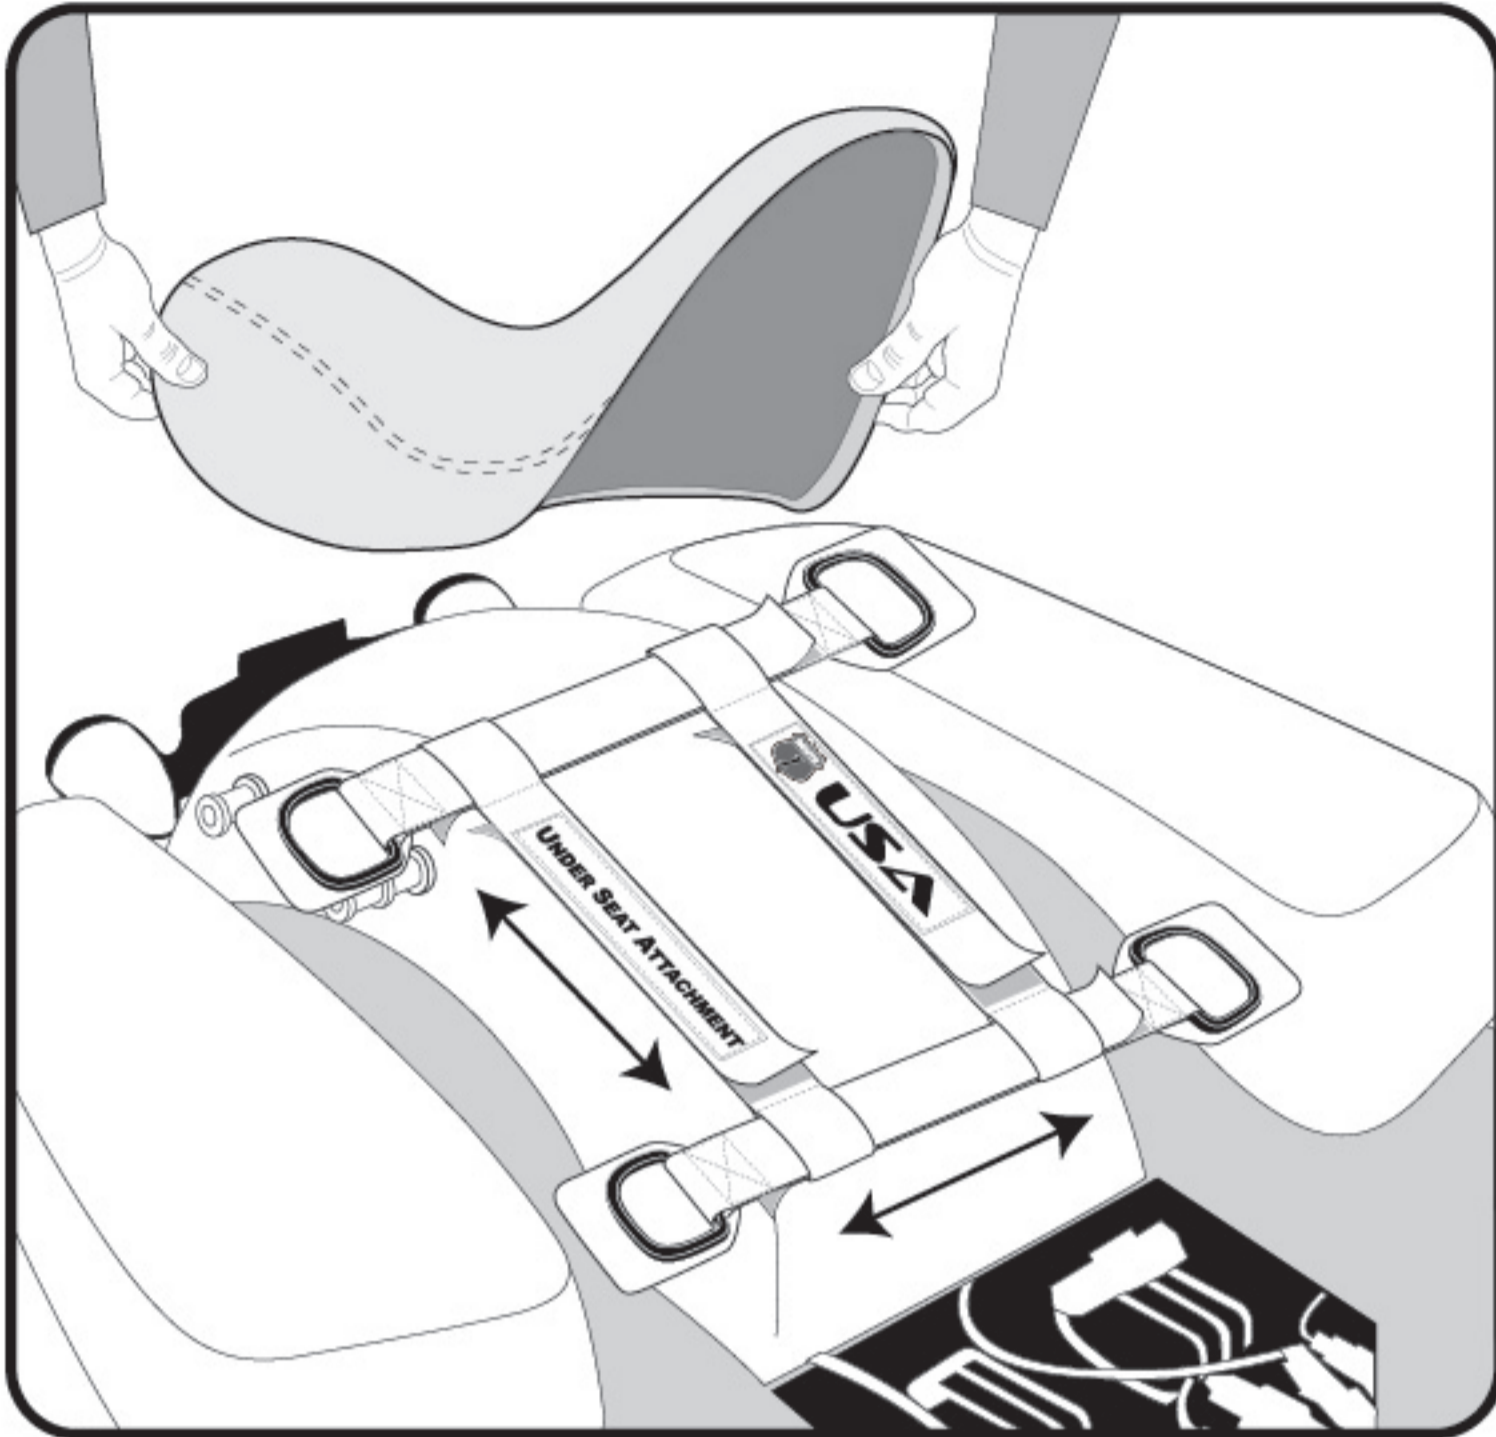


USA Under Seat Attachment is for use when you don't have a backrest or luggage rack installed on your bike. Start by removing your seat. Consult your owners manual or dealership with questions. Lay the USA on your fender making sure it does not interfere with any moving parts or wiring. 4 heavy duty self-fastening straps make the USA fully adjustable in width and length to fit most under seat configurations.

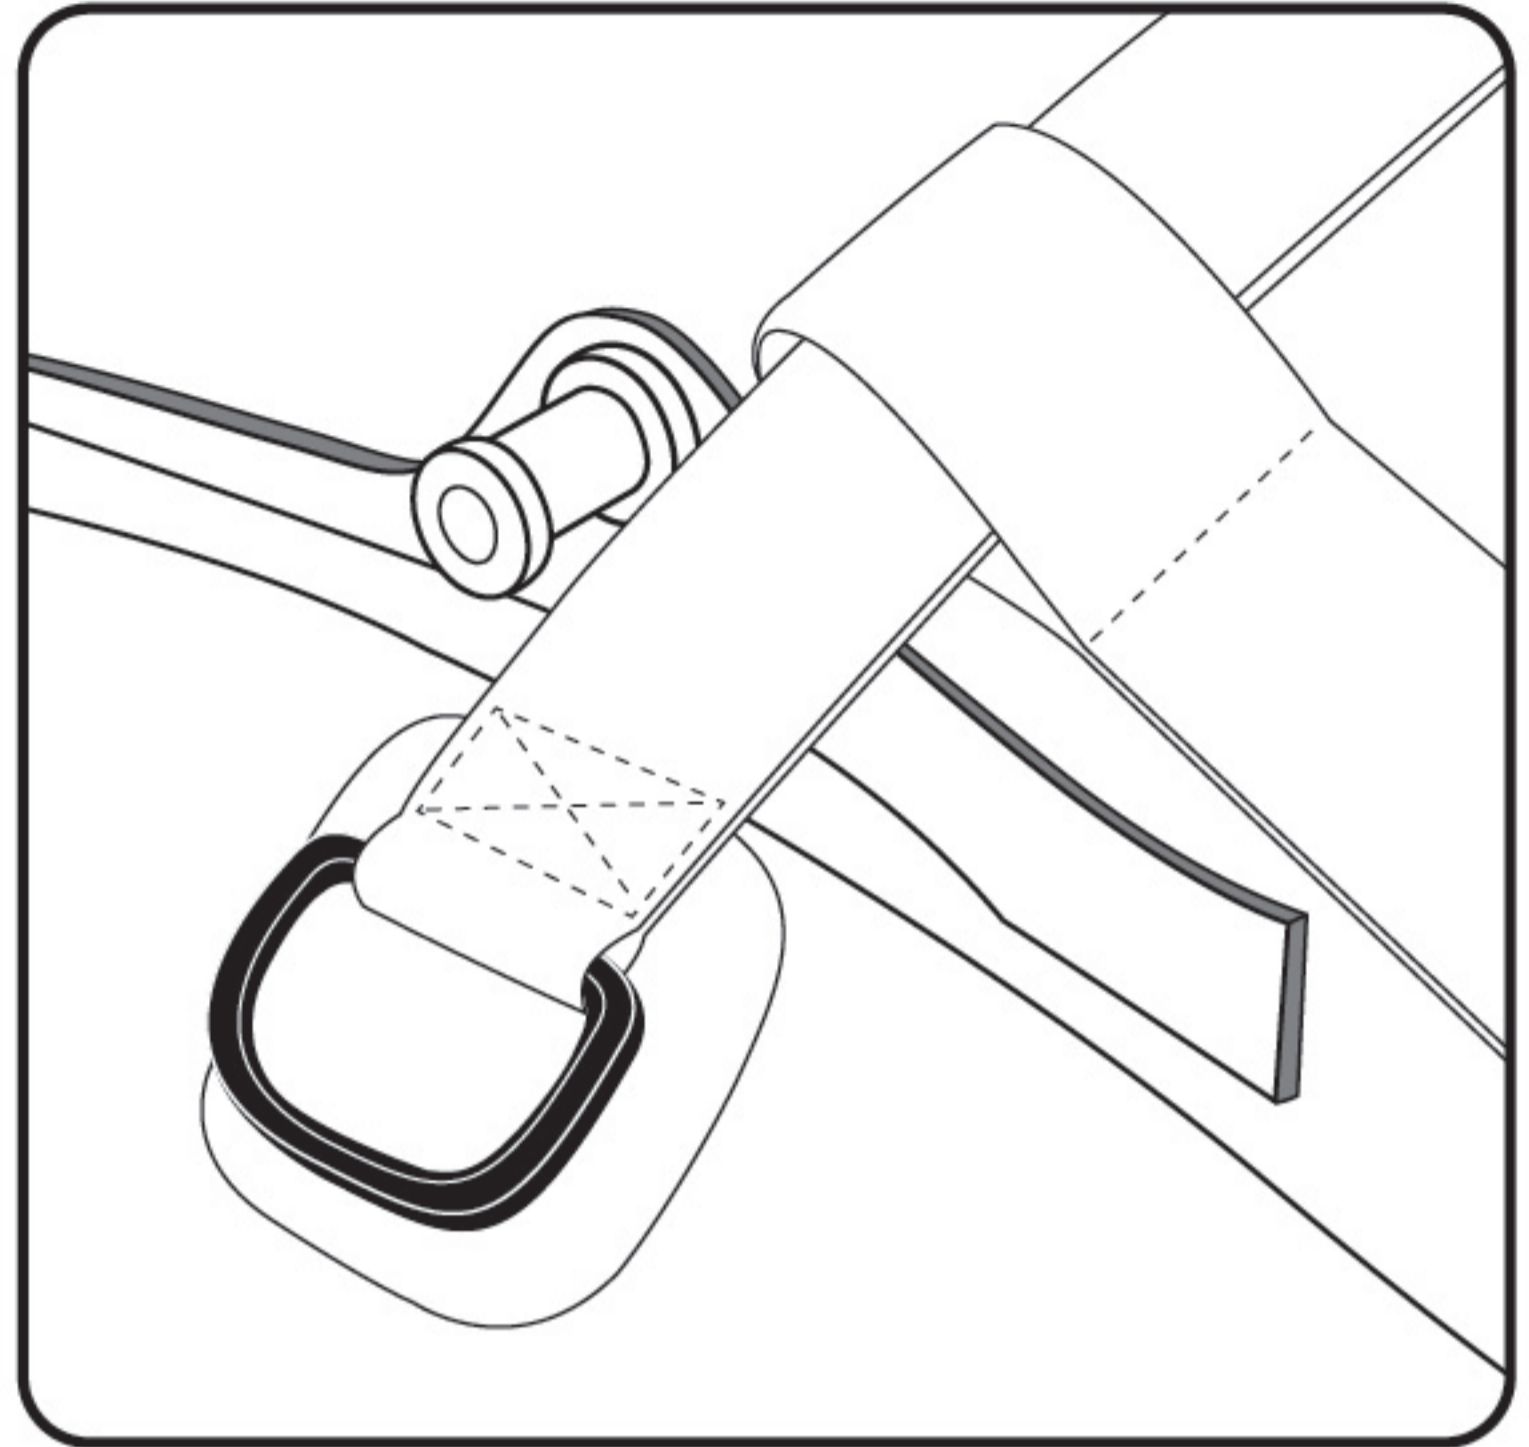

The USA is equipped with 4 metal D-rings for attaching straps and hooks. Each D-ring has a protective flap designed to help prevent scratching your motorcycle or unwanted movement after a bag is mounted. Make sure these flaps lay under each D ring when installed.

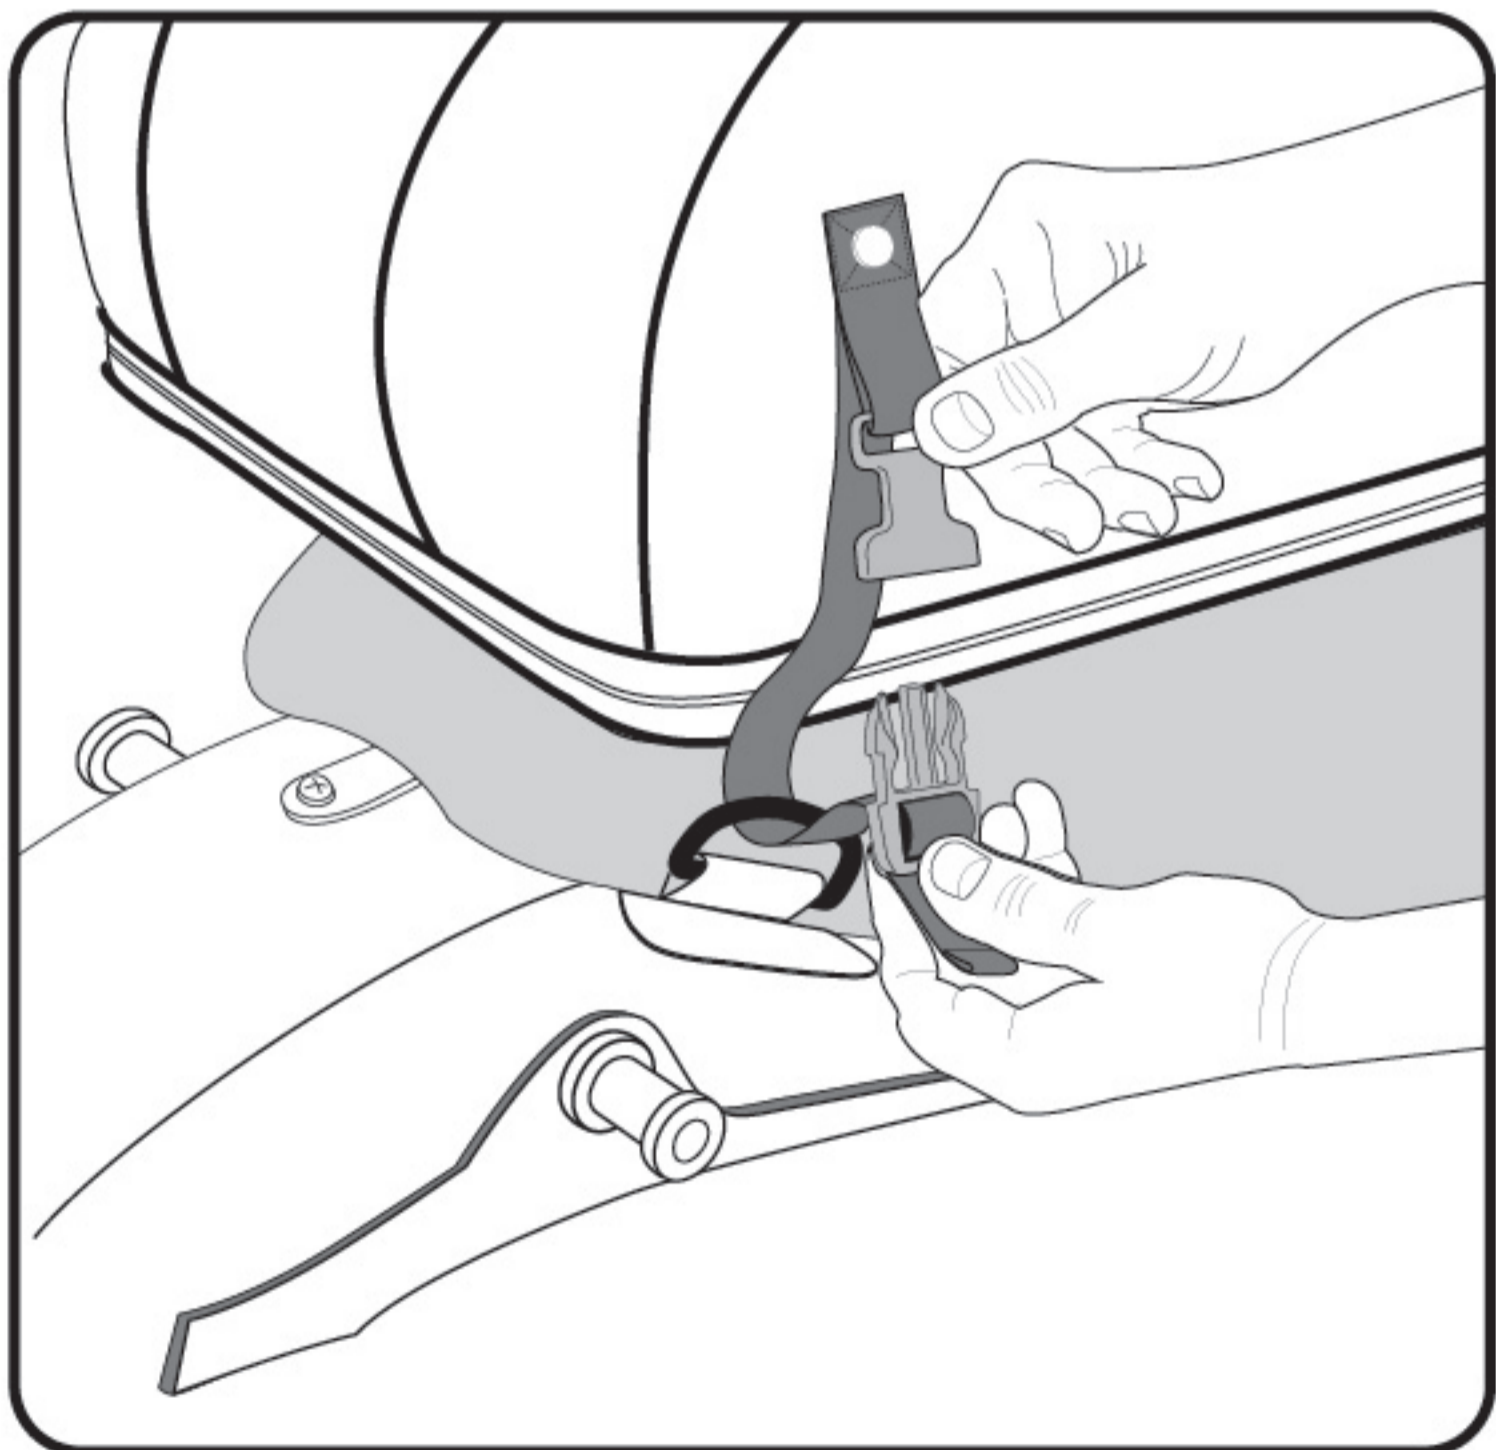

Set your seat back into position. Make sure the USA has been correctly adjusted so all 4 D-rings are visible from under the seat. Now completely reinstall your seat per your owners manual. Make sure it is fully secured before proceeding. Consult your dealer with any questions. Pass the straps with male buckles through the D-rings as shown in the picture above.

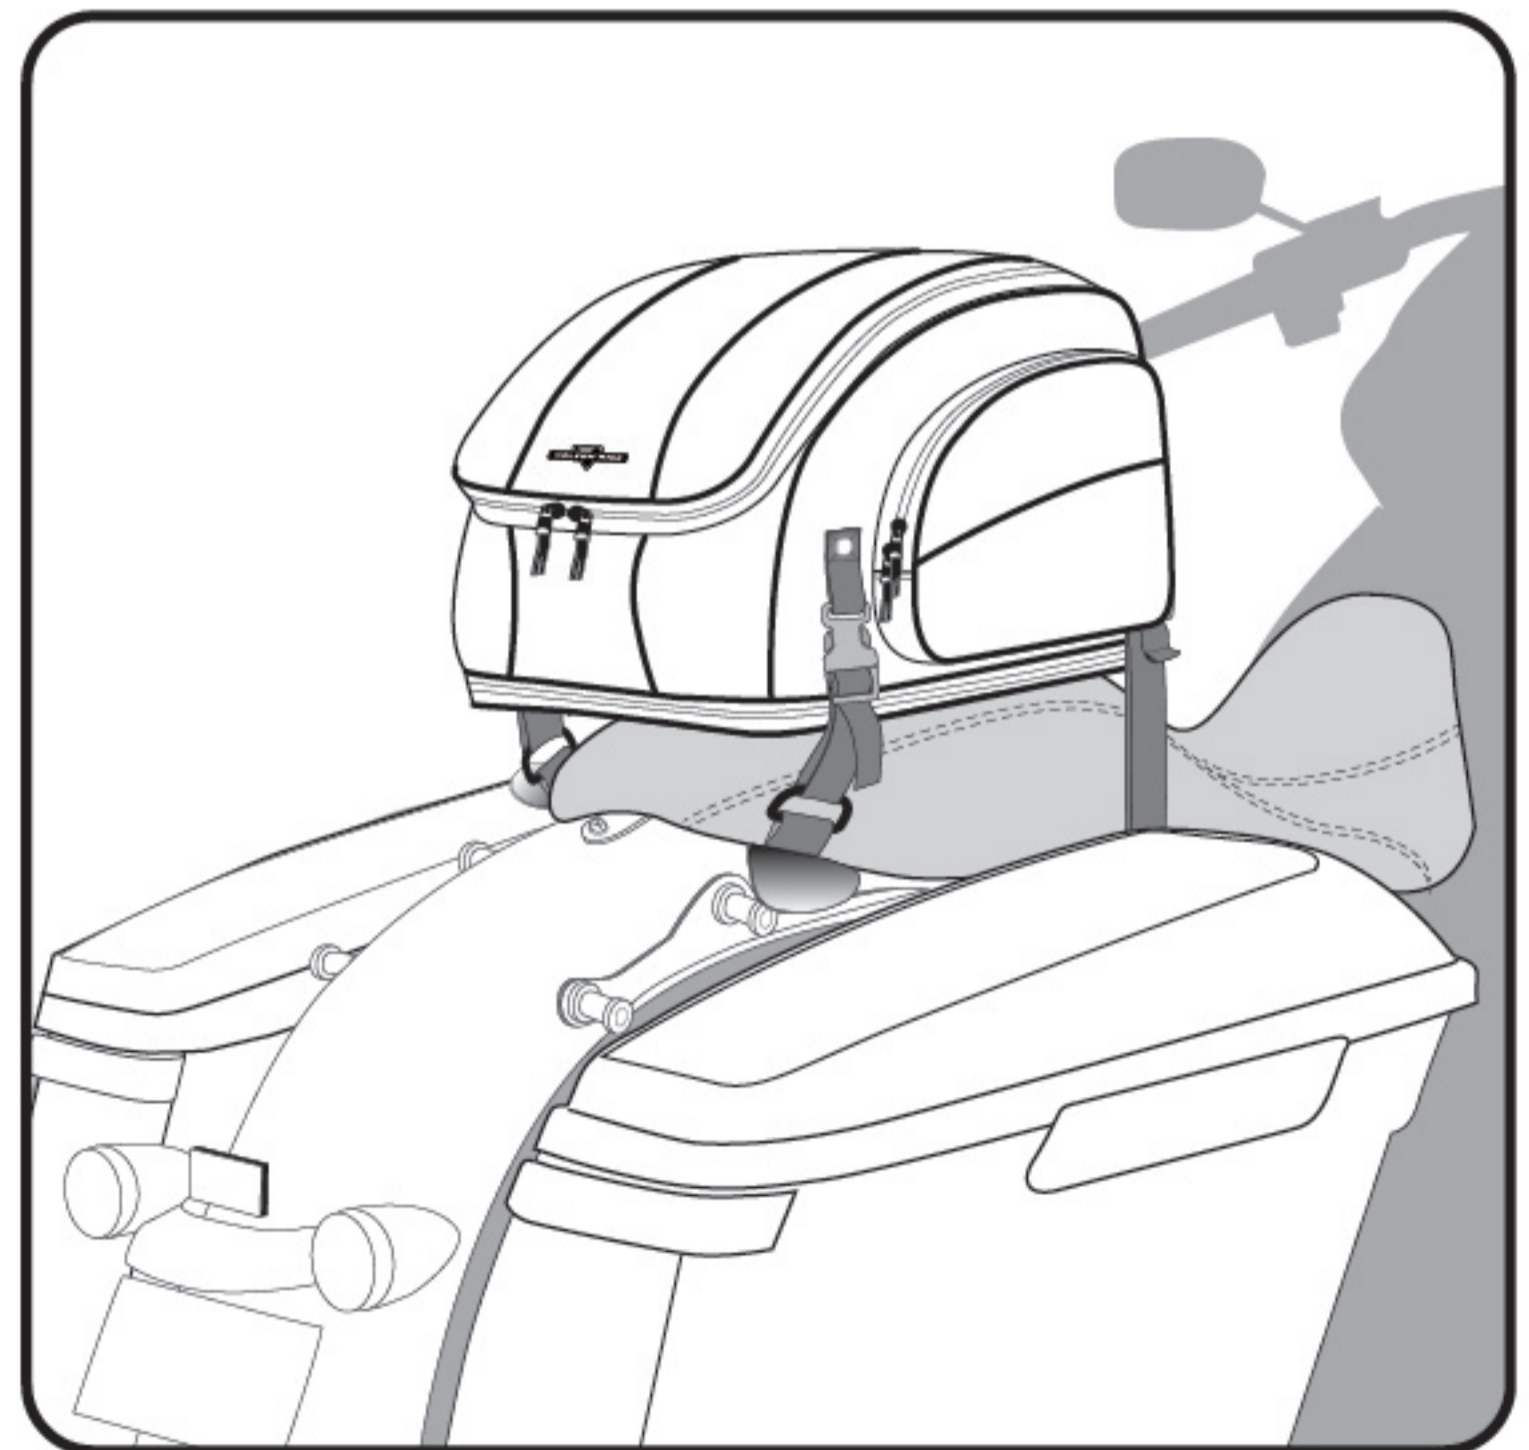

After passing the strap with the male buckle through D-ring, reconnect the male buckle back into the female buckle attached to the bag. Make sure the male buckle clicks into place when inserted. Pull to tighten. Repeat on the other 3 straps.

Warning

Read the Installation Instructions and make yourself familiar with the process of installing the Nelson-Rigg® product(s) on your bike. It is your responsibility to mount the product correctly as outlined in these instructions. Nelson-Rigg® products are intended for use at USA street legal speeds as posted by the Individual States. Nelson-Rigg® luggage must not be overloaded. Max carrying capacity is 10 lbs per bag or the maximum load suggested by the manufacturer of the vehicle, whichever is less. Failure to adhere to these warnings may result, but not limited to: the luggage becoming detached, the product becoming tangled in moving parts of the vehicle, unstable vehicle dynamics, reduction in the ability to control the vehicle. The result(s) of could lead to serious injury. Always ride safely, adhering to the local highway regulations. Always wear a helmet and protective apparel.

