

CUSTOM MOTORCYCLE ACCESSORIES

# NEW PAGE CYCLES

## DUCATI 1299 PANIGALE FENDER ELIMINATOR KIT

1. Remove four 4mm allen bolts (picture 1/2)
2. Lower fender, exposing stock connectors (picture 3)
3. Unplug stock connectors and remove stock fender
4. With new tail plate, plug into stock connectors (picture 4)
5. Slide torx bolt up through plate, and lightly tighten nut (picture 5)
6. Remove double sided tape, and fit plate onto under tail
7. Tighten nut down onto torx bolt



CUSTOM MOTORCYCLE ACCESSORIES

NEW PAGE CYCLES



## License Plate Bracket Install

If eliminating passenger pegs:

1. Use the two included flathead 6mm bolts to bolt adapter plate to the license plate. Then use the other 2 included bolts to bolt the license plate assembly onto the bike (picture 6 + drawing)

If keeping passenger pegs:

2. Use the two included flathead 6mm bolts to bolt adapter plate into the license plate. Then, screw the two stock bolts through the passenger peg bracket, then license plate adapter, into the bike

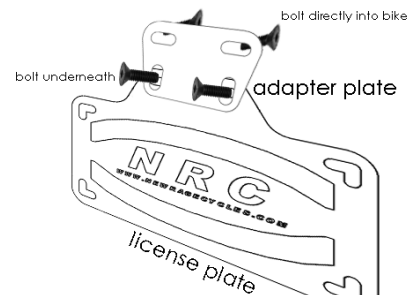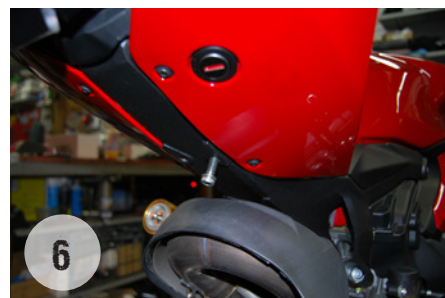

If you're looking for quality motorcycle frame & body, visit our website.